


# Nikolatesla Invert

## Downdraft induction cooktop

Specification sheet

### MEASUREMENTS

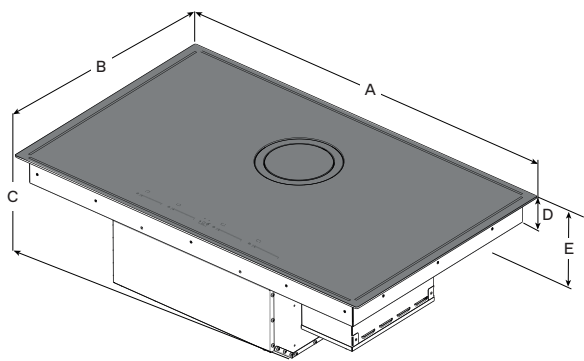

	ENI436BL
A	36" (91.54 cm)
B	22 9/16" (56.4 cm)
C	10 3/16" (25.9 cm)
D	3 1/16" (7.72 cm)
E	7 3/16" (18.21 cm)

### DESCRIPTION

With its pure, minimalist lines, NikolaTesla Invert embodies an exclusive fusion of design and technology, redefining the everyday cooking experience.

A return to essentials, this sleek induction cooktop features a seamless surface and a display that vanishes completely in standby mode. The integrated extraction area is discreetly concealed beneath a black glass and steel circle in the middle of the surface, an elegant detail that enhances the design without disrupting the kitchen's harmony.



### FEATURES

- ⌚ Timer
- 👤 Child lock
- 🍲 Pot self-detection
- 👉 Easy to maintain
- ⏸ Stop and go
- ⏻ Delay switch off
- 🌀 CFM reduction system
- 🌡 Temperature manager
- 🌀 Long life filter ++
- 🔗 Bridge zones
- 📶 Total integration
- 🌀 Airmatic
- 👉 Touch controls



#### GENERAL PROPERTIES

Width	36"
Model	ENI436BL
Dimensions	36"W x 22 9/16"D x 10 3/16"H
Electrical	220V-60Hz, 7.7Kw, 34.5A
Finish	Tempered, ultra deep black ceramic glass
Controls	Electronic glass touch & slide w/red illumination
Installation type	Ducted out or recirculating w/kit
Ventilation'	4 speed (3 speed + boost)
Blower Type (Internal)	600 CFM
Noise (Min-max sones)'	1.5-6.8 Sones
Grease filter	4 layer, black anodized aluminum mesh grease filter
Cooking zones	4 Cooking Zones (3.7 kW) - 7 1/2" x 7.9"
Heating type	Induction
Heating level	10 levels (9 + boost, see details in chart below)

#### KITS

Recirculating	KIT0192385 (2 ceramic carbon filters)
---------------	---------------------------------------


**WARRANTY:²** Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on [elica.com](http://elica.com)

Cooking level	Power (W)
Level 1	63 W
Level 2	105 W
Level 3	168 W
Level 4	252 W
Level 5	378 W
Level 6	588 W
Level 7	882 W
Level 8	1344 W
Level 9	2100 W
Booster	3700 W

#### Glass specifications


Material	Glass ceramic cooking panel
Appearance	Deep-black color
Thickness	4 mm
Color in reflexion	Black
Color in transmission	Amber
Surface structure	Though crystal smooth scratch & stain-resistant

SELF RIMMING INSTALLATION

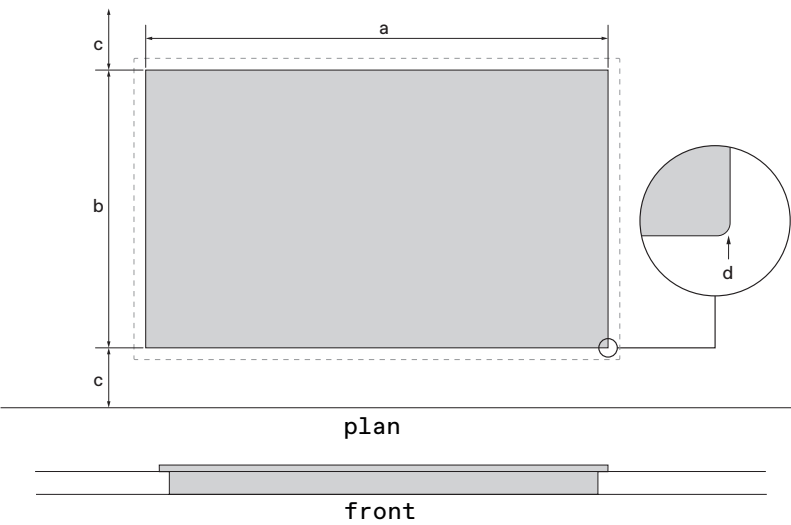

	ENI436BL
a	34 9/16" (87.7 cm)
b	21 1/8" (53.6 cm)
c	1 15/16" (5 cm) min
d	1 15/16" (5 cm)

FLUSH MOUNTED INSTALLATION

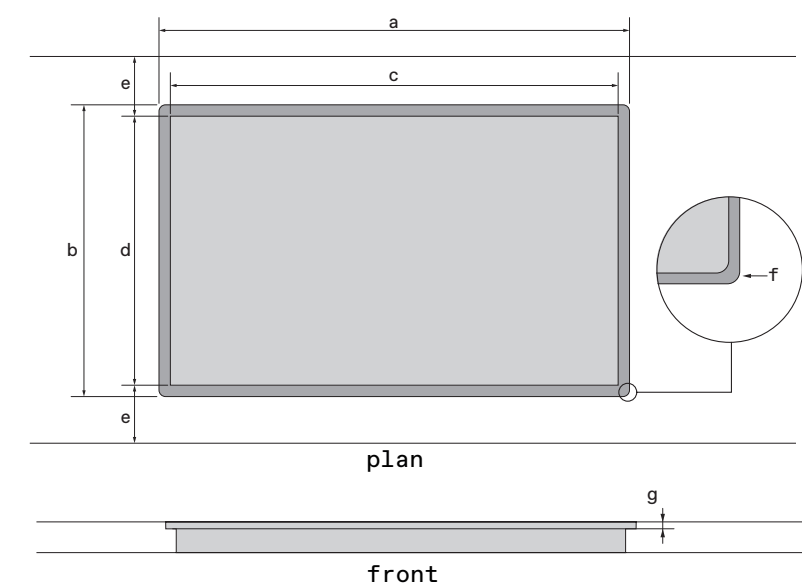

	ENI436BL
a	36 1/8" (91.8 cm)
b	22" (56.76 cm)
c	34 9/16" (87.7 cm)
d	21 1/8" (53.65 cm)
e	1 15/16" (5 cm) min
f	4 x Ø7
g	1/4" (Ø.63 cm)



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.