

DA 6996 W Pearl

Wall ventilation hood

with dimmable ambient lighting for a unique lighting mood in your kitchen.



- Design highlight - 35 1/2 (900)Inch wide bowed glass canopy
- Unique convenience - Con@ctivity 2.0
- Energy-efficient and uniform lighting – LED light strip
- Energy-efficient and quiet

EAN: 4002515780381 / material number: 10418850

Construction type	
Wall ventilation hood	•
Design	
Color	Brilliant white
Edge extraction	•
Operating modes	
Recirculated mode	Convertible
Control panel	
Electronic controls	•
Light-touch controls	•
Power levels (number excl. Intensive)	3
Intensive setting	•
Programmable 'Intensive' switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Cleaning convenience	
Easy-to-clean CleanCover hood liner	•
Networking of domestic appliances	
Automatic function Con@ctivity 2.0 (Zigbee)	•
Filter system	
Number of dishwasher-safe stainless steel grease filters	1
Lighting	
LED ClearView lighting	•
Light intensity in Lx	600
Color temperature in K	3,000
Light dimmer function	•
Ambient lighting white	•
Blower	
Dual-action blower	•
AC motor	•
Air throughput with max. duct diameter in vented mode (not for external version)	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Single-ply safety glass (ESG)	•
Technical data	
Overall hood height for vented and external in in.(mm)	23 (583)
Overall hood height for recirculation in in.(mm)	23 (583)
Canopy width in in.(mm)	35 1/2 (900)
Height of hood canopy in in.(mm)	23 (583)
Depth of hood canopy in in.(mm)	21 1/4 (537)
Net weight in lbs. (kg)	62 (28.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Hard-wired	•
Total connected load in kW	0.37
Voltage in V	120
Fuse rating in A	15
Number of phases	1

More information at www.MieleUSA.com

For further information please see next page...

DA 6996 W Pearl


Wall ventilation hood
with dimmable ambient lighting for a unique lighting mood in your kitchen.



Installation notes	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•
Wireless stick Con@ctivity 2.0 for KM	XKS 3000 Z

DA 6996 W Pearl

Wall ventilation hood
with dimmable ambient lighting for a unique lighting mood in your kitchen.

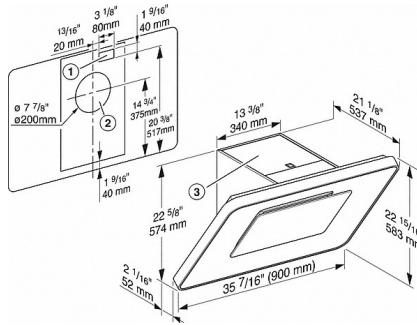

DA 6996 W (Installation drawing) - USA

- 1) Cut-out for cooker hoods with hard-wired connection rather than a plug.
- 2) Opening for ducting connection at the back. Vent Connection alternatively to the top.
- 3) Ventilation grille positioned at the top for recirculation. A distance of at least 200 mm must be maintained between the top of the appliance and the ceiling or any furniture units installed above the appliance.