


# Toblino

## Wallmount hood



Learn more

### MEASUREMENTS

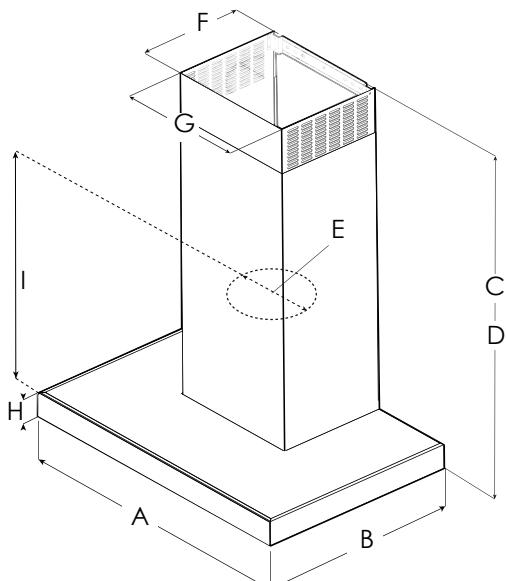

	ETB430S3	ETB436S3
A	30" (76.2 cm)	36" (91.4 cm)
B	19 $\frac{11}{16}$ " (50 cm)	
C*	Min:21 $\frac{7}{16}$ " (54.5 cm) Max:35 $\frac{13}{16}$ " (90.8 cm)	
D**	Min:21 $\frac{7}{16}$ " (54.5 cm) Max:31 $\frac{5}{16}$ " (81 cm)	
E	6" (15.24 cm)	
F	10 $\frac{3}{4}$ " (27 cm)	
G	13" (33 cm)	
H	1 $\frac{5}{8}$ " (4 cm)	
I	15 $\frac{5}{16}$ " (38.9 cm)	

\*Ductless (recirculating)

\*\* Ducted version

### DESCRIPTION

Toblino, with its super sleek hood design that's only 2" high, is the perfect complement for modern kitchen designs featuring sharp, futuristic architectural lines.

Available in 30" and 36" widths, Toblino features multiple backlight color touch controls that illuminate in elegant white, green, blue, or red, operating the LED lights and 4-speed blower. Multiple clicking sound options are also available.

Designed for standard ducted installation, Toblino can also be installed as a recirculating system using the optional kit.



### FEATURES

**3x layer mesh**

**Led light**

**CFM reduction system**



#### GENERAL PROPERTIES

Width	30"	36"
Model	ETB430S3	ETB436S3
Dimensions	30"W x 19 <sup>11</sup> / <sub>16</sub> "D x min:21 <sup>7</sup> / <sub>16</sub> " max:35 <sup>13</sup> / <sub>16</sub> "H	36"W x 19 <sup>11</sup> / <sub>16</sub> "D x min:21 <sup>7</sup> / <sub>16</sub> " max:35 <sup>13</sup> / <sub>16</sub> "H
Blower Type <sup>1</sup> (Internal)	400 CFM (4-speed)	
Noise (Min-max sones) <sup>1</sup>	0.4-5.9 Sones	
Electrical	120V-60Hz, 265W	
Illumination	2 LED, 2.1W, 3000K	
Finish	Stainless Steel	
Controls	Electronic Touch Buttons with adjustable color illumination	
Grease filters	Dishwasher-Safe, Anodized aluminum mesh filter (2 for 30" & 3 for 36")	
Installation type	Ducted or recirculating with kit (sold separately)	
Duct transition	6" round with backdraft damper	
Telescopic chimney	Can reach ceiling heights for heights 6'11"-8'7" (ducted), 7'0"-8'11" (recirculating)	

#### KITS

Chimney extension	KIT02785 (Reaches ceiling heights of 8'5"-12'1" (ducted), 8'9"-12'5" (recirculating)) KIT01935 (Reaches ceiling heights of 7'5"-10'5" (ducted), 7'9"-10'9" (recirculating))
Recirculating kit	KIT0184663 (contains 6" deflector & 3 flat carbon filters & clips)
Upgrade filter kit	GF04YB (Contains 1 filter)

#### WARRANTY:<sup>2</sup>

**Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on [elica.com](http://elica.com)**



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.