

EXTRA-LARGE CAPACITY COMMERCIAL DRYER



Featuring Factory-Installed Coin Slide and Coin Box



CE9050AW—27" Electric Dryer with Metercase CGD9050AW—27" Gas Dryer with Metercase

Machine Accepts the Following
Compatible Payment Systems:

- Coin Slide
- Coin-Drop
- Card Reader
- Non-Coin Payment Configurations
- Four Roller Suspension with Permanently Lubricated Bearings
- Push-Button Controls
- Large Lint Screen (84 Sq. In.)
- Blower Guard Reduces Service Calls
- Front Control Panel 22° Angle
- Reversible Door with Heavy-Duty Die-Cast Hinges

- Front Service Accessibility
- Electric Heating Element at 5600 Watts 240-Volt
- Gas Model Features a 24K BTU Burner
- Motor: 1/3-HP with Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element in the Event of a Broken Belt
- 4-Way Venting from Left or Right Side, Back or Bottom
- 2-Year Limited Parts Only Warranty/90-Day Labor*

*Call 1-800-NO-BELTS (800-662-3587) for warranty details.

LARGE 6.7-CU.-FT. DRUM CAPACITY

- Ideal for Handling Family-Size Loads
- Allows large loads to tumble and spread, helping to reduce dry time.

INDUSTRIAL GRADE CABINET

- Top with Integrated Backsplash
- Resists Chipping and Scratching

LARGE-CAPACITY METERCASE

- Large Coin Box for Reduced Collections
- Accepts Coin Slide, Coin-Drop, Card Reader and Non-Coin Payment Configurations

MICROPROCESSOR CONTROLS

- Time Remaining Display
- Front Controls for Ease-of-Use
- Card Reader Compatible

HIGH VELOCITY AIRFLOW SYSTEM

- Whirlpool® Commercial dryer's blower system provides optimal air velocity for efficient and versatile installation. You can now vent up to 100 ft. with three elbows, and one angled hood for versatility.


EXTRA-LARGE CAPACITY COMMERCIAL DRYER



Featuring Factory-Installed Coin Slide and Coin Box

Whirlpool® Extra-Large Capacity Commercial Dryer

DRYER SPECIFICATIONS	
MODELS	CED9050AW/CGD9050AW
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	
HP (kw)	1/3 (.25)
CAPACITY	
Cu. ft. (liters)	6.7 (190)
DOOR OPENING DIAMETER	
In. (mm)	18.25 (464)
AIRFLOW	
Gas models — cfm (cmm)	230 (6.5)
Electric models — cfm (cmm)	215 (6.1)
Tumble speed — RPM	50 ± 1
ELECTRICAL REQUIREMENTS	
CED model — Voltage	240V/60Hz
CGD model — Voltage	120V/60Hz
BREAKER/FUSE REQUIREMENTS	
CED model — Amps	30
CGD model — Amps	15
EXHAUST DUCT DIAMETER	
In. (mm)	4 (100)*
ELECTRONIC BURNER IGNITION	
CGD model	Yes
HEATING ELEMENT RATING	
CGD model — BTU/hr. (kcal/hr.)	24,000 (6,048)
CED model — Electric heating element — watts	5,600
GAS INLET	
CGD model — in.	3/8 N.P.T.
ADJUSTABLE LEVELING LEGS	
	Yes
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	163 (74)
Uncrated — lbs. (kg)	150 (68)
DIMENSIONS	
Width — in. (mm)	27 (686)
Depth — in. (mm)	29 (737)
Height — in. (mm)	45.75 (1162)**
*Use a 4" (100mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, nonmetal or combustible duct.	
**Height at metercase top does not include optional pedestal.	
See specific instructions for proper installation. Because of continuous product improvement, Whirlpool reserves the right to change specifications without notice.	
Power cords on electric models sold separately.	
LP Conversion Kit #W10402145 Pedestal Single Box Kit #WHP0400VW Pedestal Pack of 10 Kit #WHP0401VW	

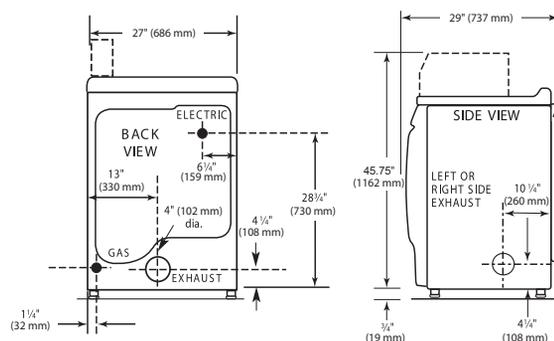

Dimensions are for planning purposes only.
See Whirlpool® Installation Instructions for full details.

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	Rigid Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	135 ft. (41.2 m)	129 ft. (39.3 m)
1	125 ft. (38.1 m)	119 ft. (36.3 m)
2	115 ft. (35.1 m)	109 ft. (33.2 m)
3	106 ft. (32.3 m)	100 ft. (30.5 m)
4	98 ft. (29.9 m)	92 ft. (28.0 m)

Number Of 90° Turns	Flexible Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	76 ft. (23.2 m)	62 ft. (18.9 m)
1	71 ft. (21.6 m)	57 ft. (17.4 m)
2	67 ft. (20.4 m)	53 ft. (16.2 m)
3	65 ft. (19.8 m)	51 ft. (15.6 m)
4	63 ft. (19.2 m)	49 ft. (14.9 m)



2-YEAR LIMITED PARTS ONLY WARRANTY

For the first two years from the date of purchase, when this major appliance is installed, maintained and operated according to the instructions attached to or furnished with the product, Whirlpool will pay for factory-specified replacement parts to correct defects in materials or workmanship that existed when this commercial appliance was purchased. See complete warranty for details.

American Pride
Designed, Engineered &
Assembled in the U.S.A.

To Locate a Distributor Near You, Please Visit www.whirlpoolcommerciallaundry.com/distributor, or Call 1-800-N0-BELTS.