

AV Receiver

# DTR-30.5

**Instruction Manual**

**Integra**

## WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE.

## CAUTION:

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



**WARNING**  
RISK OF ELECTRIC SHOCK  
DO NOT OPEN

**AVIS**  
RISQUE DE CHOC ELECTRIQUE  
NE PAS OUVRIR



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

## Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. Damage Requiring Service  
Unplug the apparatus from the wall outlet and refer servicing to qualified service personnel under the following conditions:
  - A. When the power-supply cord or plug is damaged,

PORTABLE CART WARNING



- B. If liquid has been spilled, or objects have fallen into the apparatus,
  - C. If the apparatus has been exposed to rain or water,
  - D. If the apparatus does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the apparatus to its normal operation,
  - E. If the apparatus has been dropped or damaged in any way, and
  - F. When the apparatus exhibits a distinct change in performance this indicates a need for service.
16. Object and Liquid Entry  
Never push objects of any kind into the apparatus through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock.  
The apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases shall be placed on the apparatus. Don't put candles or other burning objects on top of this unit.
17. Batteries  
Always consider the environmental issues and follow local regulations when disposing of batteries.
18. If you install the apparatus in a built-in installation, such as a bookcase or rack, ensure that there is adequate ventilation.  
Leave 20 cm (8") of free space at the top and sides and 10 cm (4") at the rear. The rear edge of the shelf or board above the apparatus shall be set 10 cm (4") away from the rear panel or wall, creating a flue-like gap for warm air to escape.

# Precautions

1. **Recording Copyright**—Unless it's for personal use only, recording copyrighted material is illegal without the permission of the copyright holder.
2. **AC Fuse**—The AC fuse inside the unit is not user-serviceable. If you cannot turn on the unit, contact the dealer from whom you purchased this unit.
3. **Care**—Occasionally you should dust the unit all over with a soft cloth. For stubborn stains, use a soft cloth dampened with a weak solution of mild detergent and water. Dry the unit immediately afterwards with a clean cloth. Don't use abrasive cloths, thinners, alcohol, or other chemical solvents, because they may damage the finish or remove the panel lettering.
4. **Power**

## **WARNING**

BEFORE PLUGGING IN THE UNIT FOR THE FIRST TIME, READ THE FOLLOWING SECTION CAREFULLY.

AC outlet voltages vary from country to country. Make sure that the voltage in your area meets the voltage requirements printed on the unit's rear panel (e.g., AC 230 V, 50 Hz or AC 120 V, 60 Hz).

The power cord plug is used to disconnect this unit from the AC power source. Make sure that the plug is readily operable (easily accessible) at all times.

For models with **[Power]** button, or with both **[Power]** and **[On/Standby]** buttons:

Pressing the **[Power]** button to select OFF mode does not fully disconnect from the mains. If you do not intend to use the unit for an extended period, remove the power cord from the AC outlet.

For models with **[On/Standby]** button only:

Pressing the **[On/Standby]** button to select Standby mode does not fully disconnect from the mains. If you do not intend to use the unit for an

extended period, remove the power cord from the AC outlet.

## 5. **Preventing Hearing Loss**

### **Caution**

Excessive sound pressure from earphones and headphones can cause hearing loss.

## 6. **Batteries and Heat Exposure**

### **Warning**

Batteries (battery pack or batteries installed) shall not be exposed to excessive heat as sunshine, fire or the like.

## 7. **Never Touch this Unit with Wet Hands**—Never handle this unit or its power cord while your hands are wet or damp. If water or any other liquid gets inside this unit, have it checked by the dealer from whom you purchased this unit.

## 8. **Handling Notes**

- If you need to transport this unit, use the original packaging to pack it how it was when you originally bought it.
- Do not leave rubber or plastic items on this unit for a long time, because they may leave marks on the case.
- This unit's top and rear panels may get warm after prolonged use. This is normal.
- If you do not use this unit for a long time, it may not work properly the next time you turn it on, so be sure to use it occasionally.

## For U.S. and Canadian models

### **FCC CAUTION**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### **Note:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful

interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer from whom you purchased this unit or an experienced radio/TV technician for help.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

## RF Exposure Compliance

This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65 and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20 cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles les radioélectriques (RF) de la FCC lignes directrices d'exposition dans le Supplément C à OET65 et d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement émet une énergie RF très faible qui est considérée conforme sans évaluation de l'exposition maximale autorisée. Cependant, cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le dispositif rayonnant et le corps (à l'exception des extrémités : mains, poignets, pieds et chevilles).

## For Canadian Models

**NOTE:** THIS CLASS B DIGITAL APPARATUS COMPLIES WITH CANADIAN ICES-003.

For models having a power cord with a polarized plug:


**CAUTION:** TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.

## Modèle pour les Canadien

**REMARQUE:** CET APPAREIL NUMÉRIQUE DE LA CLASSE B EST CONFORME À LA NORME NMB-003 DU CANADA.

Sur les modèles dont la fiche est polarisée:

**ATTENTION:** POUR ÉVITER LES CHOCS ÉLECTRIQUES, INTRODUIRE LA LAME LA PLUS LARGE DE LA FICHE DANS LA BORNE CORRESPONDANTE DE LA PRISE ET POUSSER JUSQU'AU FOND.

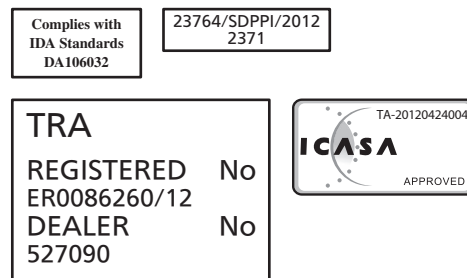

Thank you for purchasing an Integra AV Receiver. Please read this manual thoroughly before making connections and plugging in the unit.

Following the instructions in this manual will enable you to obtain optimum performance and listening enjoyment from your new AV Receiver. Please retain this manual for future reference.

## Supplied Accessories

Make sure you have the following accessories:

---

**Indoor FM antenna (→ page 18)**

---

**AM loop antenna (→ page 18)**

---

**Power cord (→ page 20)**

---

**Speaker cable labels (→ page 11)**

---

**Speaker setup microphone (→ page 24)**

---

**Remote controller (RC-867M) and two batteries (AA/R6) (→ page 10)**

---

\* In catalogs and on packaging, the letter at the end of the product name indicates the color. Specifications and operations are the same regardless of color.

# Table of Contents

## Safety Information and Introduction

<b>Important Safety Instructions</b> .....	2
<b>Precautions</b> .....	3
<b>Supplied Accessories</b> .....	4
<b>Table of Contents</b> .....	5
<b>Features</b> .....	6
<b>Front &amp; Rear Panels</b> .....	7
Front Panel .....	7
Display .....	8
Rear Panel .....	9
<b>Remote Controller</b> .....	10
Controlling the AV Receiver .....	10

## Connections

<b>Connecting the AV Receiver</b> .....	11
Connecting Your Speakers .....	11
Connecting the TV/AV components .....	14
About RIHD-compatible components .....	15
Operations that can be performed with RIHD connection .....	16
Confirm the settings .....	16
Connection Tips .....	16
Connecting the Antennas .....	18
Connecting Integra/Onkyo RI Components .....	19
Using Headphones .....	19

## Turning On & Basic Operations

<b>Turning On/Off the AV Receiver</b> .....	20
Connecting the Power Cord .....	20
Turning On .....	20
Turning Off .....	20
Firmware Update Notification .....	21
About the Hybrid Standby indicator .....	21
<b>Initial Setup</b> .....	21
Selecting the Language for the On-screen Setup Menus .....	21
Audyssey MultEQ: Auto Setup .....	21
Source Connection .....	22
Remote Mode Setup .....	22
Network Connection .....	22
Terminating the Initial Setup .....	22

Using the Automatic Speaker Setup .....	23
Performing Wireless LAN Setup .....	26

## Playback

<b>Playback</b> .....	28
Controlling Contents of USB or Network Devices .....	29
Understanding Icons on the Display .....	30
Playing an Audio from Bluetooth-enabled Device .....	30
Playing a USB Device .....	31
Listening to TuneIn .....	31
Registering Other Internet Radio .....	33
Changing the Icon Layout on the Network Service Screen .....	33
Playing Music Files on a Server (DLNA) .....	33
Playing Music Files on a Shared Folder .....	35
Remote Playback .....	36
Listening to AM/FM Radio .....	37
Playing Audio and Video from Separate Sources .....	39
Using the Listening Modes .....	40
Displaying Source Information .....	44
Using the Sleep Timer .....	44
Setting the Display Brightness .....	45
Changing the Input Display .....	45
Muting the AV Receiver .....	45
Using the Home Menu .....	46

## Advanced Operations

<b>On-screen Setup</b> .....	47
Using the Quick Setup .....	47
Using the Audio Settings of Quick Setup .....	48
Using the Setup Menu (Home) .....	50
Setup Menu Items .....	50
1. Input/Output Assign .....	51
2. Speaker Setup .....	53
3. Audio Adjust .....	55
4. Source Setup .....	57
5. Listening Mode Preset .....	61
6. Miscellaneous .....	62
7. Hardware Setup .....	63
8. Remote Controller Setup .....	67
9. Lock Setup .....	67
<b>Zone 2</b> .....	68
Making Zone 2 Connections .....	68
Setting the Zone 2 Out .....	69
Controlling Zone 2 Components .....	69
Using the 12V Triggers .....	70

Using the Remote Controller in Zone 2 and Multiroom Control Kits .....	71
---------------------------------------------------------------------------	----

## Controlling Other Components

<b>Controlling Other Components</b> .....	72
Preprogrammed Remote Control Codes .....	72
Looking up for Remote Control Codes .....	72
Entering Remote Control Codes .....	72
Remapping Colored Buttons .....	73
Remote Control Codes for Integra/ Onkyo Components Connected via RI .....	73
Resetting the Remote Mode Buttons .....	73
Resetting the Remote Controller .....	73
Controlling Other Components .....	74
Using the Onkyo Dock .....	76
Controlling Your iPod/iPhone .....	77

## Appendix

<b>Troubleshooting</b> .....	78
<b>Firmware Update</b> .....	86
<b>About HDMI</b> .....	89
<b>Network/USB Features</b> .....	90
<b>License and Trademark Information</b> .....	92
<b>Specifications</b> .....	93

To reset the AV receiver, see page **78**.

# Features

## Amplifier

---

- 95 Watts/Channel @ 8 ohms (FTC)
- 160 Watts/Channel @ 6 ohms (IEC)
- 175 Watts/Channel @ 6 ohms (JEITA)
- WRAT—Wide Range Amplifier Technology (5 Hz to 100 kHz bandwidth)
- Optimum Gain Volume Circuitry
- H.C.P.S. (High Current Power Supply) Massive High Power Transformer
- 3 Stage Inverted Darlington Amplifier Design (FR/FL/C)

## Processing

---

- Incorporates Qdeo™ technology for HDMI Video Upscaling (to 4K Compatible)
- HDMI (Audio Return Channel, 3D, DeepColor, x.v.Color, Lip Sync, 4K (up-scaling and Passthrough), DTS-HD Master Audio, DTS-HD High Resolution Audio, Dolby TrueHD, Dolby Digital Plus, DSD and Multi-CH PCM)
- Dolby TrueHD and DTS-HD Master Audio
- Dolby Pro Logic IIz
- Non-Scaling Configuration
- A-Form Listening Mode Memory
- Direct Mode
- Music Optimizer for Compressed Digital Music files
- Phase Matching Bass System
- 192 kHz/24-bit D/A Converters
- Powerful and Highly Accurate 32-bit Processing DSP
- Jitter Cleaning Circuit Technology

## Connections

---

- 6 HDMI Inputs and 2 Outputs
- 4K (up-scaling and Passthrough\*)-compatible HDMI Inputs
  - \* Compatible with HDMI IN1 to HDMI IN4 only
- Integra/Onkyo **RIHD** for System Control
- 3 Digital Inputs (1 Optical/2 Coaxial)
- Component Video Switching (2 Input/1 Output)
- Banana Plug-Compatible Speaker Posts
- Powered Zone 2
- Zone 2 Pre/Line Out
- IR Input/Output and 12 V Triggers
- RS232 Port for Interface Control
- Bi-Amping Capability for FL/FR with SBL/SBR
- Internet Radio Connectivity
- Network Capability for Streaming Audio Files
- Wi-Fi (Wireless LAN) Connectivity
- Wireless Music Playback via Bluetooth
- Front-Panel USB Input for Memory Devices
- MHL-Enabled HDMI IN1

## Miscellaneous


---

- 40 FM/AM Presets
- Audyssey MultEQ® to correct room acoustic problems
- Audyssey Dynamic EQ® for loudness correction
- Audyssey Dynamic Volume® to maintain optimal listening level and dynamic range
- Crossover Adjustment (40/45/50/55/60/70/80/90/100/110/120/130/150/200 Hz)
- A/V Sync Control Function (up to 800 ms)
- Auto Standby Function
- On-Screen Display via HDMI
- Preprogrammed **RI**-Compatible Remote

# Front & Rear Panels

## Front Panel

### (North American models)

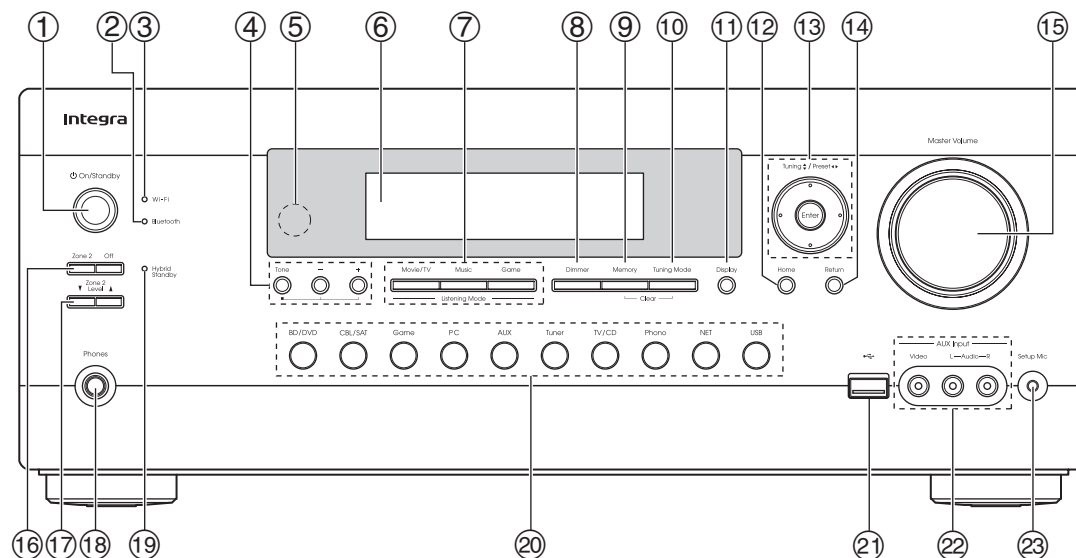


For detailed information, see the pages in parentheses.

- ① On/Standby button (20)
- ② Bluetooth indicator (30, 67)
- ③ Wi-Fi indicator (26)
- ④ Tone and Tone Level buttons (48)
- ⑤ Remote control sensor (10)
- ⑥ Display (8)
- ⑦ Listening Mode buttons (40)
- ⑧ Dimmer button (North American models) (45)
- ⑨ Memory button (37)


- ⑩ Tuning Mode button (37)
- ⑪ Display button (44)
- ⑫ Home button (46)
- ⑬ Tuning ▲/▼ (37), Preset ◀/▶ (37), cursor and Enter buttons
- ⑭ Return button
- ⑮ Master Volume control (28)
- ⑯ Zone 2, Off buttons (69)
- ⑰ Zone 2 Level ▲/▼ buttons (69)
- ⑱ Phones jack (19)
- ⑲ Hybrid Standby indicator (21)

### (Australian models)

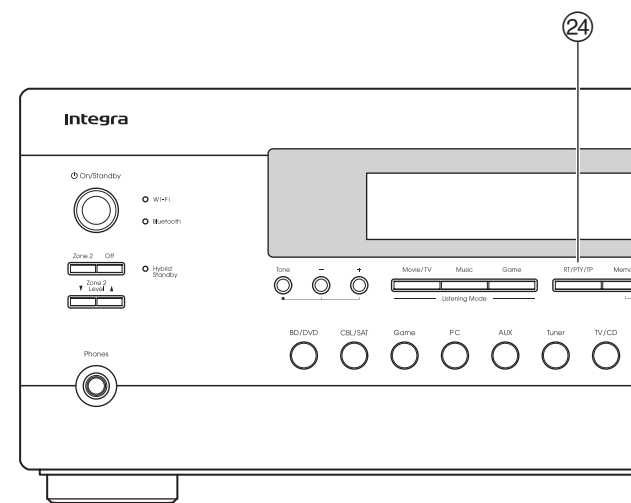

- ⑳ Input selector buttons (28)
- ㉑ USB port (31)
- ㉒ AUX Input Audio/Video jacks
- ㉓ Setup Mic jack (24)
- ㉔ RT/PTY/TP button (Australian models) (38)

## Display

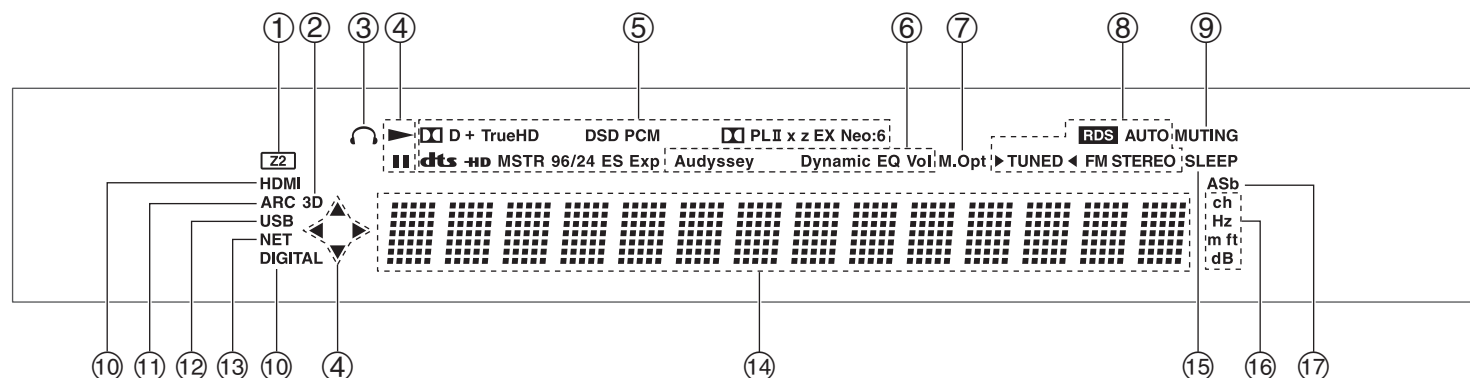

For detailed information, see the pages in parentheses.

① **Z2 (Zone 2) indicator (69)**

② **3D indicator**

This lights when a 3D input signal is detected.

③ **Headphone indicator (19)**

④ **►, || and cursor indicators (31)**

⑤ **Listening mode and format indicators (40, 61)**

⑥ **Audyssey indicator (23, 57)**

**Dynamic EQ indicator (57)**

**Dynamic Vol indicator (57)**

⑦ **M.Opt (Music Optimizer) indicator (49)**

⑧ **Tuning indicators**

**RDS indicator (excluding North American models) (38)**

**AUTO indicator (37)**

**TUNED indicator (37)**

**FM STEREO indicator (37)**

⑨ **MUTING indicator (45)**

⑩ **Input indicators (17)**

**HDMI indicator (64)**

**DIGITAL indicator**

⑪ **ARC (Audio Return Channel) indicator (65)**

⑫ **USB indicator (31)**

⑬ **NET indicator (31 to 35, 66)**

⑭ **Message area**

⑮ **SLEEP indicator (44)**

⑯ **Channel/Unit indicators**

**ch indicator**

**Hz indicator**


**m/ft indicator**

**dB indicator**

⑰ **ASb (Auto Standby) indicator (65)**



## Rear Panel

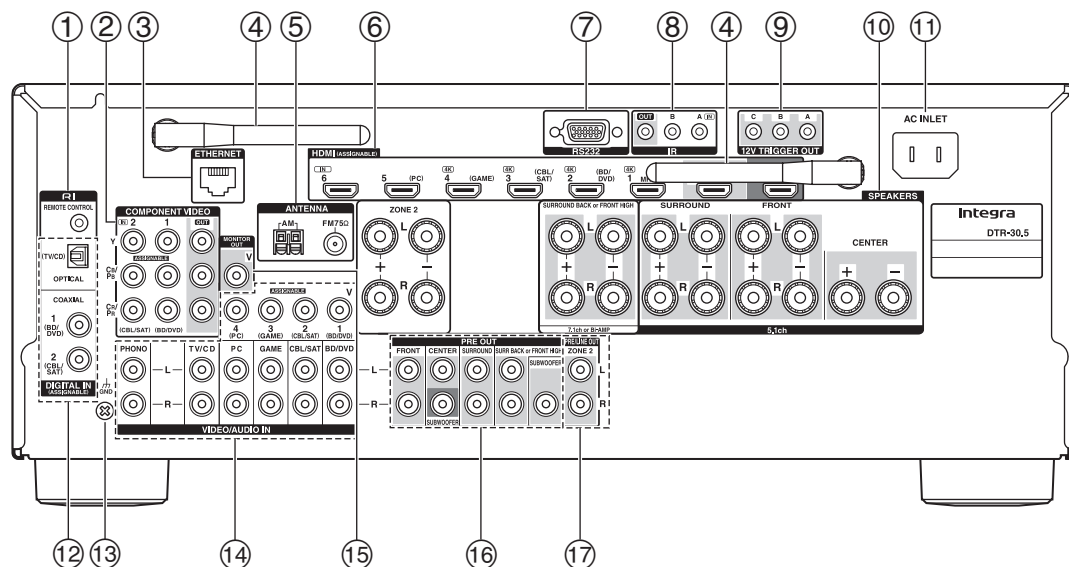


See "Connecting Your Speakers" for connection  
(→ pages 11 to 19).

- ① **RM REMOTE CONTROL jack**
- ② **COMPONENT VIDEO IN and OUT jacks**
- ③ **ETHERNET port**

### ④ **Wireless antenna**

When the AV receiver is connected to the network  
by wireless, adjust the position of the antenna  
(→ pages 26, 30).

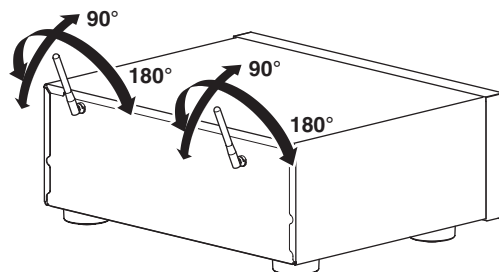


- ⑤ **FM ANTENNA jack and AM ANTENNA terminal**
- ⑥ **HDMI IN and HDMI output (HDMI OUT MAIN and HDMI OUT SUB) jacks**
- ⑦ **RS232 port**  
Terminal for control.
- ⑧ **IR IN A/B and OUT jacks**
- ⑨ **12V TRIGGER OUT A/B/C jacks**
- ⑩ **SPEAKERS terminals**  
(CENTER, FRONT, SURROUND, SURROUND BACK or FRONT HIGH, ZONE 2)
- ⑪ **AC INLET**
- ⑫ **DIGITAL IN COAXIAL and OPTICAL jacks**
- ⑬ **GND screw**
- ⑭ **Composite video and analog audio jacks**  
(BD/DVD IN, CBL/SAT IN, GAME IN, PC IN, TV/CD IN, PHONO IN)
- ⑮ **MONITOR OUT V jack**
- ⑯ **PRE OUT jacks**  
(CENTER, FRONT, SURROUND, SURR BACK or FRONT HIGH, SUBWOOFER)
- ⑰ **ZONE 2 PRE/LINE OUT jacks**

# Remote Controller

## Controlling the AV Receiver

To control the AV receiver, press **Receiver** to select Receiver mode.

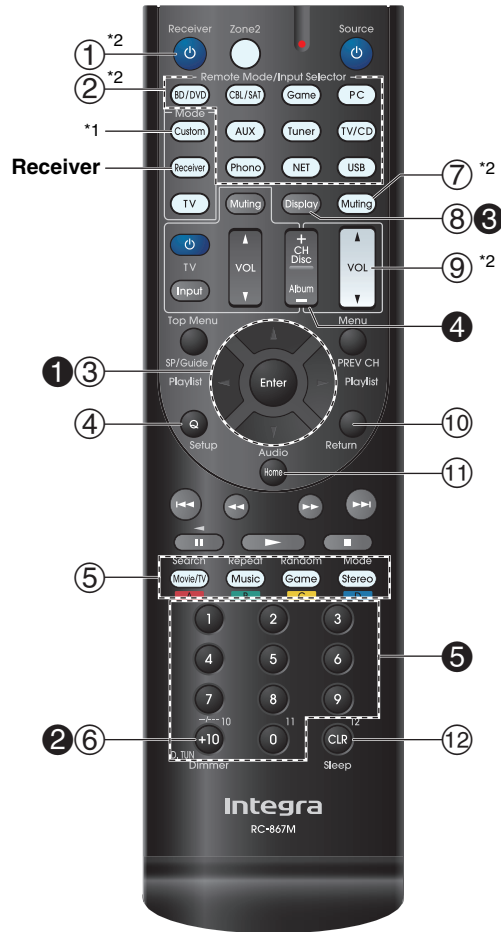

For detailed information, see the pages in parentheses.

- ① **Receiver button (20)**
- ② **Remote Mode/Input Selector buttons (28)**
- ③ **▲/▼/◀/▶ and Enter buttons**
- ④ **Q Setup button (47)**
- ⑤ **Listening Mode buttons (40)**
- ⑥ **Dimmer button (45)**
- ⑦ **Muting button (45)**
- ⑧ **Display button (44)**
- ⑨ **VOL ▲/▼ button (28)**
- ⑩ **Return button**
- ⑪ **Home button (46)**
- ⑫ **Sleep button (44)**

### Tip

- You can also use the remote controller to control Integra/Onkyo Blu-ray Disc/DVD player, CD player, and other components. See “Entering Remote Control Codes” for more details (→ page 72).

### Controlling the tuner

To control the AV receiver's tuner, press **Tuner** (or **Receiver**).


You can select AM or FM by pressing **Tuner** repeatedly.

- ① **▲/▼ buttons (37)**
- ② **D.TUN button (37)**
- ③ **Display button**
- ④ **CH +/- button (38)**
- ⑤ **Number buttons (37)**


- \*1 To control a component, you must first enter the remote control code. See “Entering Remote Control Codes” for more details (→ page 72).
- \*2 These buttons can also be used when a **Remote Mode** other than Receiver mode is selected.

### Aiming the remote controller

To use the remote controller, point it at the AV receiver's remote control sensor, as shown below.

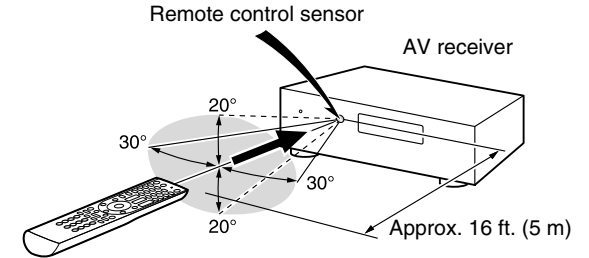

### Installing the batteries




### Note

- If the remote controller doesn't work reliably, try replacing the batteries.
- Don't mix new and old batteries or different types of batteries.
- If you intend not to use the remote controller for a long time, remove the batteries to prevent damage from leakage or corrosion.
- Remove expired batteries as soon as possible to prevent damage from leakage or corrosion.

# Connections

## Connecting the AV Receiver

### Connecting Your Speakers

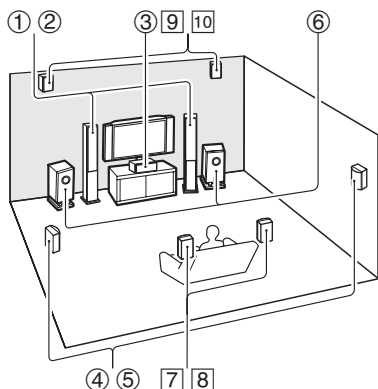

- ① ② Front speakers
- ③ Center speaker
- ④ ⑤ Surround speakers
- ⑥ Subwoofer(s)
- ⑦ ⑧ Surround back speakers
- ⑨ ⑩ Front high speakers

### Speaker Configuration

The following table indicates the channels you should use depending on the number of speakers that you have.

No matter how many speakers you use, a powered subwoofer is recommended for a really powerful and solid bass.

To get the best from your surround sound system, you need to set the speaker settings automatically (→ [page 23](#)) or manually (→ [page 54](#)).

Number of speakers	2	3	4	5	6	7	7
Front speakers	✓	✓	✓	✓	✓	✓	✓
Center speaker		✓				✓	✓
Surround speakers			✓	✓	✓	✓	✓
Surround back speaker*1					✓		
Surround back speakers*1						✓	
Front high speakers*1							✓

### Speaker Configuration


5.1-channel: ① ② ③ ④ ⑤ ⑥

7.1-channel: ① ② ③ ④ ⑤ ⑥ + ⑦ ⑧

7.1-channel: ① ② ③ ④ ⑤ ⑥ + ⑨ ⑩

\*1 Front high and surround back speakers cannot be used at the same time.

### Using Powered Subwoofers

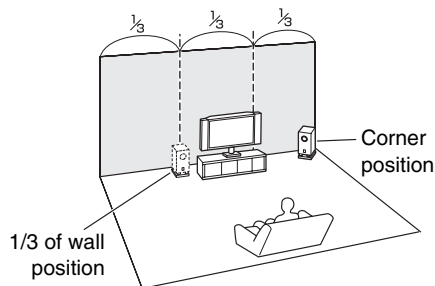

To find the best position for your subwoofer, while playing a movie or some music with good bass, experiment by placing your subwoofer at various positions within the room, and choose the one that provides the most satisfying results.

You can connect the powered subwoofer with two **SUBWOOFER PRE OUT** jacks respectively.

The same signal is output from each jack.

#### Tip


- If your subwoofer is unpowered and you're using an external amplifier, connect the subwoofer pre out jack to an input on the amplifier.

### Attaching the Speaker Cable Labels


The speaker terminals are color-coded for identification purpose.

Speaker	Color
Front left, Front high left, Zone 2 left	White
Front right, Front high right, Zone 2 right	Red
Center	Green
Surround left	Blue
Surround right	Gray
Surround back left	Brown
Surround back right	Tan

The supplied speaker cable labels are also color-coded and you should attach them to the positive (+) side of each speaker cable in accordance with the table above. Then all you need to do is to match the color of each label to the corresponding speaker terminal.



If you're using only one surround back speaker, connect it to the **SURROUND BACK** or **FRONT HIGH L** terminals.

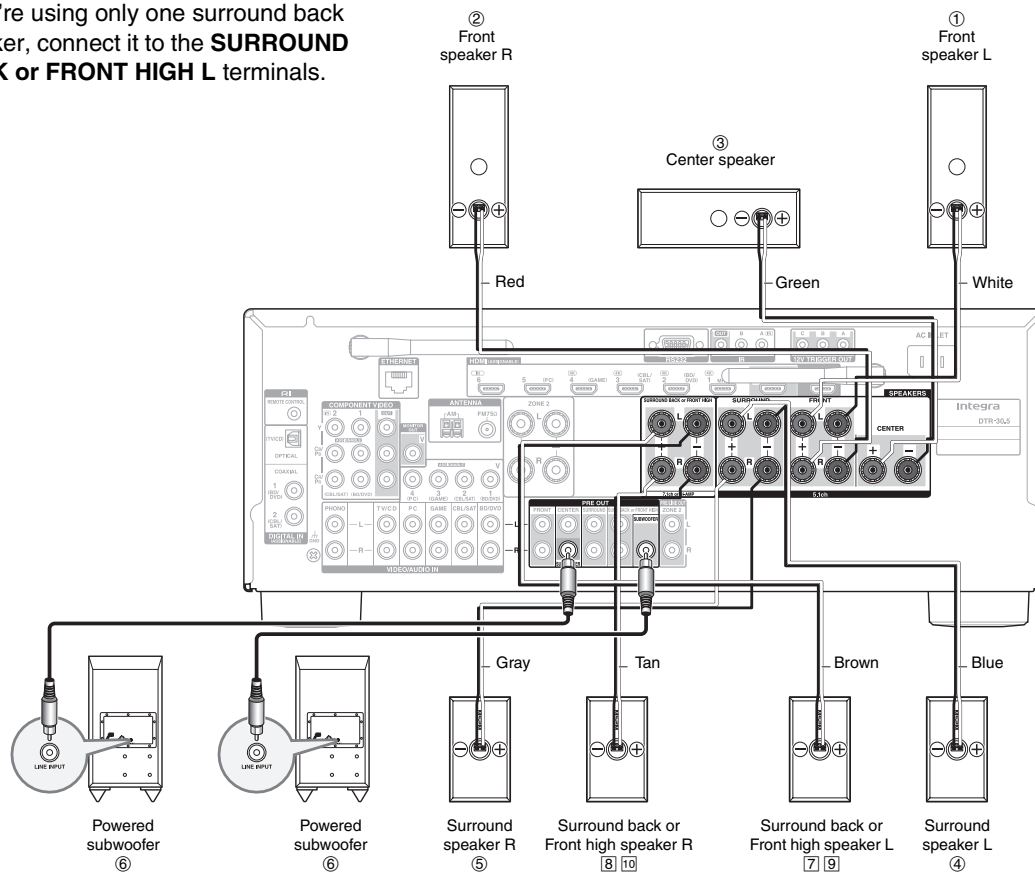


- Pay close attention to speaker wiring polarity. In other words, connect positive (+) terminals only to positive (+) terminals, and negative (–) terminals only to negative (–) terminals. If you get them the wrong way around, the sound will be out of phase and will sound unnatural.

- Read the instructions supplied with your speakers.
- By default, speakers for 7.1-channel surround are configured to use: front right/front left/center/surround right/surround left/surround back right/surround back left/subwoofer.

### ■ Screw-type speaker terminals

Strip 1/2" to 5/8" (12 to 15 mm) of insulation from the ends of the speaker cables, and twist the bare wires tightly, as shown.




### ■ Banana Plugs (North American models)


- If you are using banana plugs, tighten the speaker terminal before inserting the banana plug.
- Do not insert the speaker code directly into the center hole of the speaker terminal.

### ■ Speaker Connection Precautions

- **(North American models)** You can connect speakers with an impedance of between 6 and 16 ohms. If you use speakers with a lower impedance, and use the amplifier at high volume levels for a long period of time, the built-in amp protection circuit may be activated.
- **(Australian models)** You can connect speakers with an impedance of between 4 and 16 ohms. If the impedance of any of the connected speakers is 4 ohms or more, but less than 6 ohms, be sure to set the minimum speaker impedance to “4ohms” (→ **page 53**). If you use speakers with a lower impedance, and use the amplifier at high volume levels for a long period of time, the built-in protection circuit may be activated.
- Unnecessarily long, or very thin speaker cables may affect the sound quality and should be avoided.
- Be careful not to short the positive and negative wires. Doing so may damage the AV receiver.
- Make sure the metal core of the wire does not have contact with the AV receiver's rear panel. Doing so may damage the AV receiver.

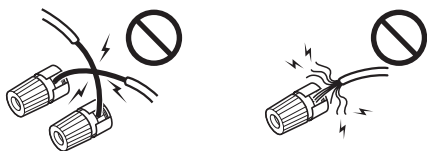

- Don't connect more than one cable to each speaker terminal. Doing so may damage the AV receiver.
- Don't connect one speaker to several terminals.

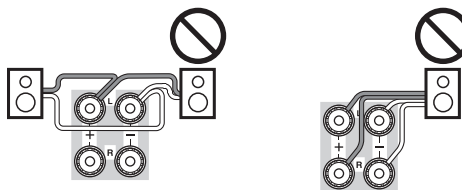

### Bi-amping the Front Speakers


#### Important:

- When making the bi-amping connections, be sure to remove the jumper bars that link the speakers' tweeter (high) and woofer (low) terminals.
- Bi-amping can be used only with speakers that support bi-amping. Refer to your speaker manual.

Bi-amping provides improved bass and treble performance.


When bi-amping is used, the AV receiver is able to drive up to a 5.1 speaker system in the main room. Perform bi-amping connections by using **FRONT** terminals and **SURROUND BACK** or **FRONT HIGH** terminals as shown below.

Once you've completed the bi-amping connections and turned on the AV receiver, you must set the speaker setting to enable bi-amping (→ **page 54**).

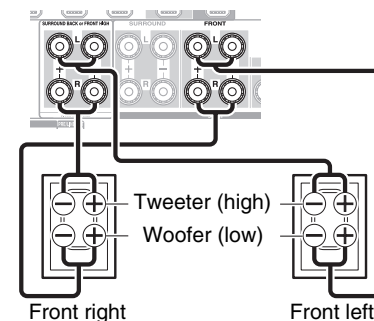

### Connecting a Power Amplifier

You can use the AV receiver as a preamp. Connect all speaker outputs to the power amplifier. See the manuals supplied with your amplifier for details.

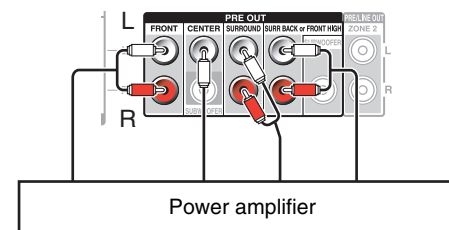


#### Note


- Specify “None” for the channel that you don't want to output (→ **page 54**).

## Connecting the TV/AV components

Before connecting the power cord, connect all of your speakers and AV components. To display the setup menu on the TV screen, connecting the TV to **HDMI OUT MAIN** is required.

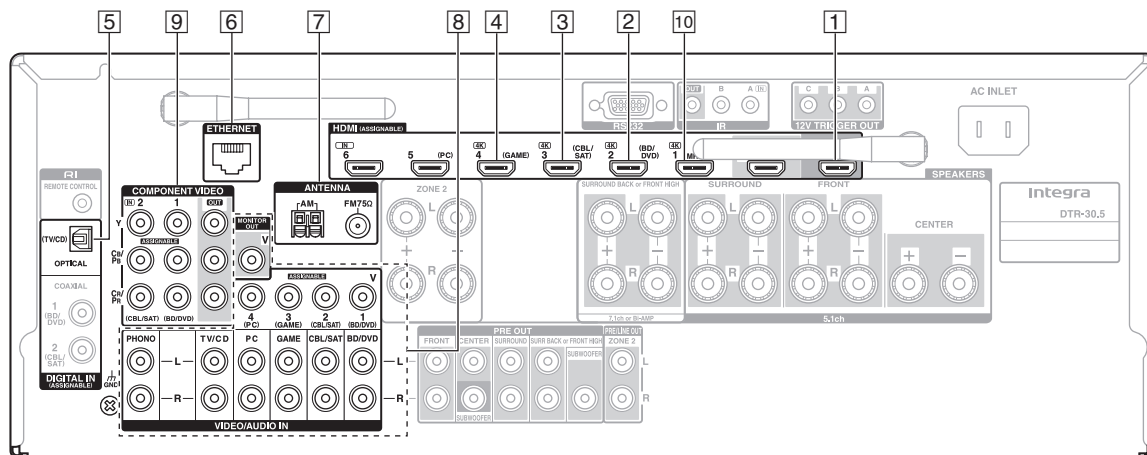

If you select the input selector button, the signal from the component connected to the assigned jack is played.

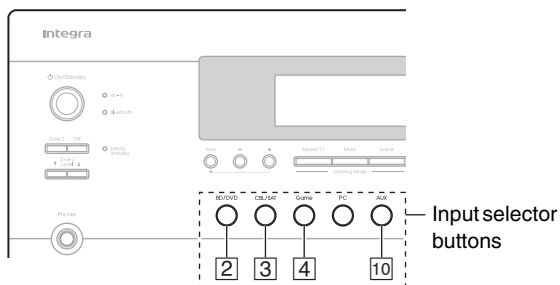

- Before making any AV connections, read the manuals supplied with your AV components.
- Push plugs in all the way to make good connections (loose connections can cause noise or malfunctions).

- To prevent interference, keep audio and video cables away from power cords and speaker cables.

### Connections

- 1 Use this jack to connect to the HDMI input of the TV. If your TV doesn't support Audio Return Channel (ARC)\*1, you need to connect an optical digital cable together with the HDMI cable to jack 5.

Another TV can be connected to the **HDMI OUT SUB** jack.

\*1 ARC is the function that carries the audio signal from the TV to jack 1. With ARC, a single HDMI cable can connect the TV and the AV receiver.

- 2 Use this jack to connect to your Blu-ray Disc/DVD player, etc.


- 3 Use this jack to connect to the Satellite/cable set-top box, etc.
- 4 Use this jack to connect to the game consoles, etc.
- 6 Use this port to connect to a LAN port on a router so the AV receiver can be connected to your home network.
- 7 Use jack and terminal here to connect the supplied FM antenna and AM loop antenna.
- 8 Use this jack to make connections using an analog audio cable.  
With this connection, you can also enjoy analog audio from external components while you are in Zone 2.
- 9 Use this jack to make connections using a component video cable.
- 10 Use this jack to connect to the camcorder/MHL-enabled mobile device, etc.

### Tip

- To listen to the audio of a component connected via HDMI through your TV's speakers, enable "**HDMI Through**" (→ **page 64**) and set the AV receiver to standby mode.
- In the case of Blu-ray Disc/DVD players, if no sound is output despite following the above-mentioned procedure, set your Blu-ray Disc/DVD player's HDMI audio settings to PCM.
- Connect a turntable (MM) that has a built-in phono preamp to **TV/CD IN**, or connect it to **PHONO IN** with the phono preamp turned off. If your turntable (MM) doesn't have a phono preamp, connect it to **PHONO IN**. If your turntable has a moving coil (MC) type cartridge, you'll need a commercially available MC head amp or MC transformer to connect to **PHONO IN**. See your turntable's manual for details.  
If your turntable has a ground wire, connect it to the AV receiver's **GND** screw. With some turntables, connecting the ground wire may produce an audible hum. If this happens, disconnect it.


### ■ MHL (Mobile High-Definition Link)

With its support for MHL (Mobile High-Definition Link), **HDMI IN 1** allows you to deliver high-definition video from a connected mobile device.

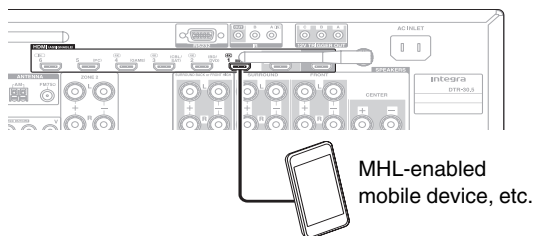

### Connecting to the Network (Optional)

The following diagram shows how you can connect the AV receiver to your home network. In this example, it's connected to a LAN port on a router, which has a 4-port 100Base-TX switch built-in. Network connection by wireless LAN is possible. See "Performing Wireless LAN Setup" for connections (→ page 26).

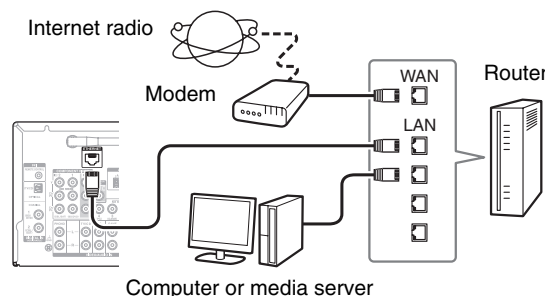

Do not connect the AV receiver's **USB** port to a USB port on your computer. Music on your computer cannot be played through the AV receiver in this way.

The default of the assignment for the input selector buttons and jacks are as shown below. These settings can be changed. (The assignment for the **AUX Input Video** jack and the analog audio jacks cannot be changed.)

Input selector buttons	HDMI jacks	COMPONENT VIDEO jacks	DIGITAL IN COAXIAL and OPTICAL jacks	Composite video and analog audio jacks
BD/DVD	HDMI IN 2	COMPONENT VIDEO IN 1	DIGITAL IN COAXIAL 1	VIDEO IN 1/AUDIO IN BD/DVD
CBL/SAT	HDMI IN 3	COMPONENT VIDEO IN 2	DIGITAL IN COAXIAL 2	VIDEO IN 2/AUDIO IN CBL/SAT
Game	HDMI IN 4			VIDEO IN 3/AUDIO IN GAME
PC	HDMI IN 5			VIDEO IN 4/AUDIO IN PC
AUX	HDMI IN 1			AUX Input Video/Audio
TV/CD			DIGITAL IN OPTICAL	AUDIO IN TV/CD
Phono				AUDIO IN PHONO

### RIHD

The AV receiver allows interoperability of the CEC (Consumer Electronics Control) specified in the HDMI standard, which is known as RIHD. Various linked operations can be performed by connecting the AV receiver to an RIHD-compatible TV, player, or recorder.

Default setting is set to off, so it is required to change the setting to on.

Perform this setting after the initial setup.

### About RIHD-compatible components

The following components are **RIHD**-compatible (As of January 2013).

#### ■ TV

- Sharp TV

#### ■ Players/Recorders

- Onkyo and Integra **RIHD**-compatible players
- Toshiba players and recorders
- Sharp players and recorders (only when used together with Sharp TV)

\* Models other than those mentioned above may have some interoperability if compatible with CEC, which is part of the HDMI Standard, but operation cannot be guaranteed.

#### Note

- For proper linked operations, do not connect more **RIHD**-compatible components than the quantities specified below, to the HDMI input terminal.
  - Blu-ray Disc/DVD players: up to three.
  - Blu-ray Disc/DVD recorders/Digital Video Recorders: up to three.
  - Cable/Satellite Set-top boxes: up to four.
- Do not connect the AV receiver to another AV receiver/AV amplifier via HDMI.
- Proper linked operations are not guaranteed when more **RIHD**-compatible components than the above-mentioned quantities are connected.



## Operations that can be performed with RIHD connection

### ■ For RIHD-compatible TV

The following linked operations are enabled by connecting the AV receiver to an **RIHD**-compatible TV.

- The AV receiver will enter standby mode when the TV is set to standby.
- You can set on the menu screen of the TV to either output the audio from the speakers connected to the AV receiver, or from the speakers of the TV.
- It is possible to output the audio coming from the tuner or auxiliary input of your TV to the speakers of the AV receiver. (A connection such as an optical digital cable or similar is required in addition to the HDMI cable.)
- Input to the AV receiver can be selected with the remote controller of the TV.
- Operations such as volume adjustment or similar for the AV receiver can be performed from the remote controller of the TV.

### ■ For RIHD-compatible players/recorders

The following linked operations are enabled by connecting the AV receiver to an **RIHD**-compatible player/recorder.

- When playback is started on the player/recorder, AV receiver will switch to the HDMI input of the player/recorder that is playing back.
- Operation of the player/recorder is possible using the remote controller supplied with the AV receiver.

\* Depending on the model used, not all operations may be available.

#### Note

- Do not assign an HDMI IN to the TV/CD selector at this time, otherwise appropriate CEC (Consumer Electronics Control) operation will not be guaranteed.

## Confirm the settings

1. Turn on the power for all connected components.
2. Turn off the power of the TV, and confirm that the power of the connected components is turned off automatically with the link operation.
3. Turn on the power of the Blu-ray Disc/DVD player/recorder.
4. Start playback on the Blu-ray Disc/DVD player/recorder, and verify the following:
  - The AV receiver automatically turns on, and selects the input to which the Blu-ray Disc/DVD player/recorder is connected.
  - The TV automatically turns on, and selects the input to which the AV receiver is connected.
5. Following the operating instructions of the TV, select "Use the TV speakers" from the menu screen of the TV, and confirm that the audio is output from the speakers of the TV, and not from the speakers connected to the AV receiver.
6. Select "Use the speakers connected from the AV receiver" from the menu screen of the TV, and confirm that the audio is output from the speakers connected to the AV receiver, and not from the TV speakers.

#### Note


- Audio from DVD-Audio or Super Audio CD may not output from the TV speakers. You will be able to output the audio from the TV speakers by setting the audio output of the DVD player to 2ch PCM. (It may not be possible depending on the player models.)
- Even if you set to output audio on the TV speakers, audio will be output from the speakers connected to the AV receiver when you adjust the volume or switch the input on the AV receiver. To output audio from the TV speakers, redo the corresponding operations on the TV.
- In case of an **RIHD** connection with **RI** and **RI** audio control compatible components, do not connect the **RI** cable at the same time.

- On the TV, when you select anything other than the HDMI jack to which the AV receiver is connected, the input on the AV receiver will be switched to "TV/CD".
- The AV receiver will automatically power on in conjunction when it determines it to be necessary. Even if the AV receiver is connected to an **RIHD** compatible TV or player/recorder, it will not power on if it is not necessary. It may not power on in conjunction when the TV is set to output audio from the TV.
- Linked functions with the AV receiver may not work depending on the component model connected. In such cases, operate the AV receiver directly.

## Connection Tips

### The video and audio signal flow


Connect the AV receiver between the AV components and the TV. The signal from the AV components is carried through the AV receiver. You can enjoy the audio of the TV through the AV receiver.



Video components can be connected by using any one of the following video connection formats: composite video, component video, or HDMI, the latter offering the best picture quality.

Video input signals flow through the AV receiver as shown, with composite video and component video sources all being upconverted for the HDMI output(s).



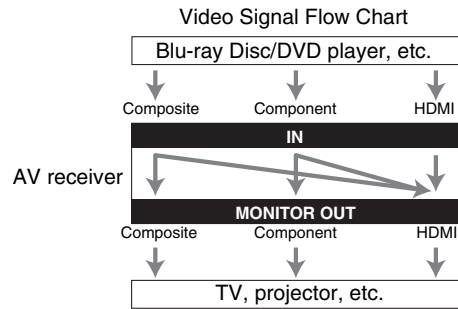

The composite video and component video outputs pass through their respective input signals as they are.

#### Note


- In order for the AV receiver to upconvert component input to HDMI output, the source output must be set to 480i/576i. When signal is input at resolution of 480p/576p and more, error message will be displayed.

#### Signal Selection

If signals are present at more than one input, the inputs will be selected automatically in the following order of priority: HDMI, component video, composite video.

However, for component video only, regardless of whether a component video signal is actually present, if a component video input is assigned to the input selector, that component video input will be selected. And if no component video input is assigned to the input selector, this will be interpreted as no component video signal being present.

In the Signal Selection Example shown below, video signals are present at both the HDMI and composite video inputs. However, the HDMI signal is automatically selected as the source and the video is output by the HDMI outputs.

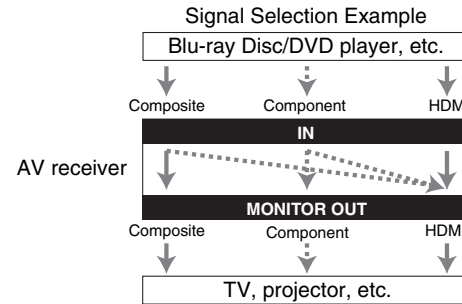


- To by-pass the upconversion, set the “**Picture Mode**” setting to “**Bypass**” (→ page 59).

Audio components can be connected by using any of the following audio connection formats: analog, optical, coaxial, or HDMI.

When choosing a connection format, bear in mind that the AV receiver does not convert digital input signals for analog line outputs and vice versa.

If signals are present at more than one input, the inputs will be selected automatically in the following order of priority: HDMI, digital, analog.

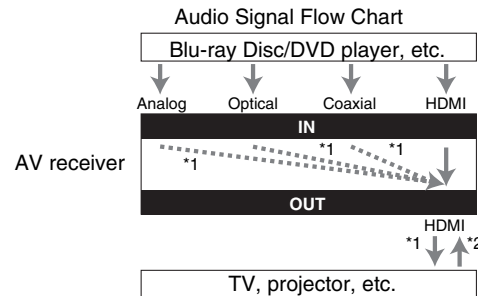

\*1 Depends on the “**Audio TV Out (Main)**” or “**Audio TV Out (Sub)**” setting (→ page 64).

\*2 This is possible when “**Audio Return Channel**” is set to “**Auto**” (→ page 65), the TV/CD input selector is selected, and your TV is ARC capable.

#### Tip

- When a signal is input via HDMI and the corresponding input selector is selected, the **HDMI** indicator lights. In the case of an optical or coaxial connection, the **DIGITAL** indicator lights. In the case of an analog connection, neither of the **HDMI** and **DIGITAL** indicators light.

## AV Cables and Jacks


### HDMI

HDMI connections can carry digital video and audio.



### Component video

Component video separates the luminance (Y) and color difference signals (P<sub>B</sub>, P<sub>R</sub>), providing the best picture quality (some TV manufacturers label their component video sockets slightly differently).



### Composite video

Composite video is commonly used on TVs, DVDs, and other video equipment.



### ■ Optical digital audio

Optical digital connections allow you to enjoy digital sound such as PCM<sup>\*1</sup>, Dolby Digital or DTS. The audio quality is the same as coaxial.



### ■ Coaxial digital audio

Coaxial digital connections allow you to enjoy digital sound such as PCM<sup>\*1</sup>, Dolby Digital or DTS. The audio quality is the same as optical.



### ■ Analog audio (RCA)

Analog audio connections (RCA) carry analog audio.



<sup>\*1</sup> For PCM signals, the supported sampling rates are 32/44.1/48/88.2/96 kHz. With HDMI connections, 176.4 and 192 kHz are also supported.

#### Note

- The AV receiver does not support SCART plugs.
- The AV receiver's optical digital jacks have shutter-type covers that open when an optical plug is inserted and close when it's removed. Push plugs in all the way.


#### Caution

- To prevent shutter damage, hold the optical plug straight when inserting and removing.

## Connecting the Antennas

This section explains how to connect the supplied indoor FM antenna and AM loop antenna.

The AV receiver won't pick up any radio signals without any antenna connected, so you must connect the antenna to use the tuner.

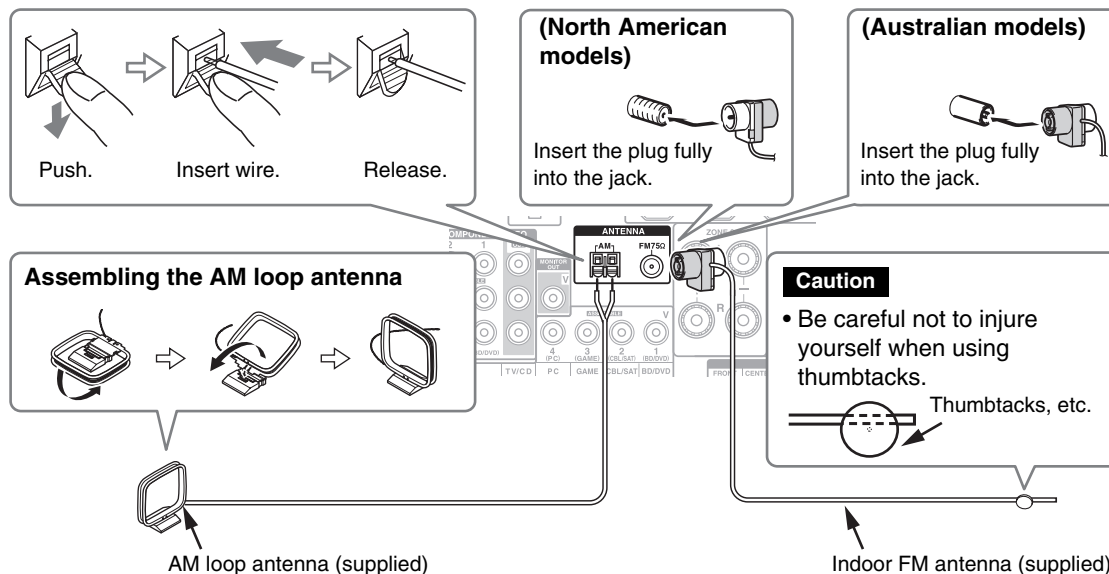

#### Note

- Once your AV receiver is ready for use, you'll need to tune into a radio station and position the antenna to achieve the best possible reception.
- Keep the AM loop antenna as far away as possible from your AV receiver, TV, speaker cables, and power cords.

#### Tip

- If you cannot achieve good reception with the supplied indoor FM antenna, try a commercially available outdoor FM antenna instead.
- If you cannot achieve good reception with the supplied indoor AM loop antenna, try using it with a commercially available outdoor AM antenna.

## Connecting Integra/Onkyo RI Components

- 1 Make sure that each Integra/Onkyo component is connected with an analog audio cable (connection 8 in the hookup examples) (→ page 14).
- 2 Make the **RI** connection (see the illustration).
- 3 If you're using an **RI Dock**, or cassette tape deck, change the Input Display (→ page 45).

With **RI** (Remote Interactive), you can use the following special functions:

### ■ System On/Auto Power On


When you start playback on a component connected via **RI**, while the AV receiver is on standby, the AV receiver will automatically turn on and select that component as the input source.

### ■ Direct Change

When playback is started on a component connected via **RI**, the AV receiver automatically selects that component as the input source.

### ■ Remote Control

You can use the AV receiver's remote controller to control your other **RI**-capable Integra/Onkyo components, pointing the remote controller at the AV receiver's remote control sensor instead of the component. You must enter the appropriate remote control code first (→ page 73).

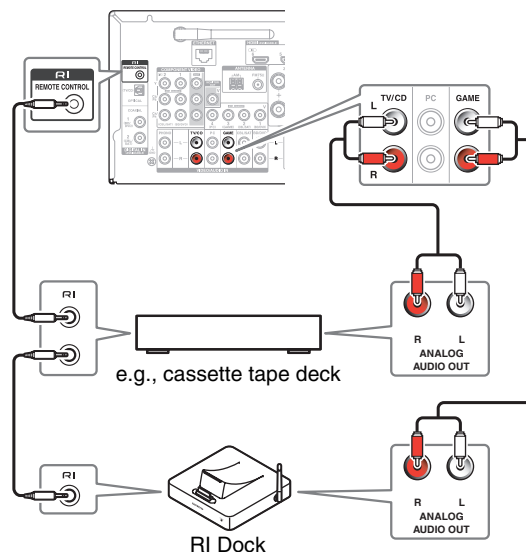

### Note

- Use only **RI** cables for **RI** connections. **RI** cables are supplied with Integra/Onkyo components.
- Some components have two **RI** jacks. You can connect either one to the AV receiver. The other jack is for connecting additional **RI**-capable components.
- Connect only Integra/Onkyo components to **RI** jacks. Connecting other manufacturer's components may cause a malfunction.
- Some components may not support all **RI** functions. Refer to the manuals supplied with your Integra/Onkyo components.
- While Zone 2 is on, the System On/Auto Power On and Direct Change **RI** functions do not work.

## Using Headphones

- 1 Connect a pair of stereo headphones with a standard plug (1/4 inch or ø 6.3 mm) to the **Phones** jack.

While the headphones plug is inserted in the **Phones** jack, indicator lights.

### Note


- Always turn down the volume before connecting your headphones.
- While the headphones plug is inserted in the **Phones** jack, the speakers are turned off. (The Zone 2 speakers are not turned off.)
- When you connect a pair of headphones, the listening mode is set to Stereo, unless it's already set to Stereo, Mono, or Direct.

# Turning On & Basic Operations

## Turning On/Off the AV Receiver

### Connecting the Power Cord

- 1 Connect the supplied power cord to the AV receiver's AC INLET.

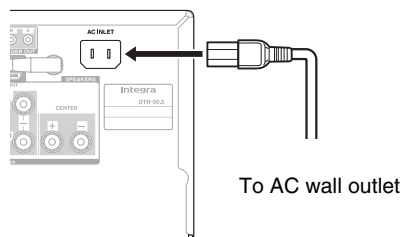

- 2 Plug the power cord into an AC wall outlet.

#### Note

- Before connecting the power cord, connect all of your speakers and AV components.
- Turning on the AV receiver may cause a momentary power surge that might interfere with other electrical equipment on

the same circuit. If this is a problem, plug the AV receiver into a different branch circuit.

- Do not use a power cord other than the one supplied with the AV receiver. The supplied power cord is designed exclusively for use with the AV receiver and should not be used with any other equipment.
- Never disconnect the power cord from the AV receiver while the other end is still plugged into a wall outlet. Doing so may cause an electric shock. Always disconnect the power cord from the wall outlet first, and then the AV receiver.

### Turning On

- 1 Press **On/Standby** on the front panel.  
or

**Press Receiver followed by **Receiver** on the remote controller.**

The AV receiver comes on and its display lights.

#### ■ Smooth Operation in a Few Easy Steps (Initial Setup)

To ensure smooth operation, here's a few easy steps to help you configure the AV receiver before you use it for the very first time. These settings only need to be made once. See "Initial Setup" for details (→ page 21).

### Turning Off

- 1 Press **On/Standby** on the front panel.  
or

**Press Receiver followed by **Receiver** on the remote controller.**

The AV receiver will enter standby mode. To prevent any loud surprises when you turn on the AV receiver, always turn down the volume before you turn it off.

#### Tip

- The **Hybrid Standby** indicator may light depending on the status of settings (→ page 21).
- For details on power management settings, see "Auto Standby" (→ page 65).
- If the HDMI Through setting is not set in standby mode, an MHL-enabled mobile device cannot be charged even if it is connected.

## Firmware Update Notification

When a new version of the firmware is available, the notification window “**Firmware Update Available**” pops up. This notification only appears when the AV receiver is connected to the Internet (→ **pages 15, 26**). To perform the firmware update, follow the instructions on screen.

Use **▲/▼** and **Enter** on the AV receiver or remote controller to select one of the options.

► **Update Now:**

Starts the firmware update.  
Refer to “Firmware Update” (→ **page 86**).

► **Remind me Later:**

The update notification will pop up again the next time you turn the AV receiver on.

► **Never Remind me:**

Disables the automatic update notification.

**Tip**

- The update notification window can be enabled or disabled in “**Update Notice**” (→ **page 66**).

## About the Hybrid Standby indicator

By way of optimized circuitry, this function reduces power consumption when the AV receiver is in standby mode. The **Hybrid Standby** indicator will light in either of the following conditions:

- “**HDMI Through**” is enabled (the **HDMI** indicator is off).
- “**Network Standby**” is enabled (the **NET** indicator is off).

**Note**

- If Zones are turned on or, if a mobile device connected to **HDMI IN 1** (MHL) is charging, the **Hybrid Standby** indicator won't light.

## Initial Setup

This section explains the settings that we recommend you to make before using the AV receiver for the very first time. A setup wizard is launched upon first-time use to let you perform those settings.

**Tip**

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.


### Selecting the Language for the On-screen Setup Menus

This step determines the language used for the on-screen setup menus. See “**Language**” in “**OSD Setup**” (→ **page 62**).

**Tip**

- Pressing **Home** will close the setup wizard. To restart the initial setup, select “**Initial Setup**” in the “**Hardware Setup**” menu (→ **page 67**).

After selecting the language for on-screen setup menus, a welcome screen is displayed.

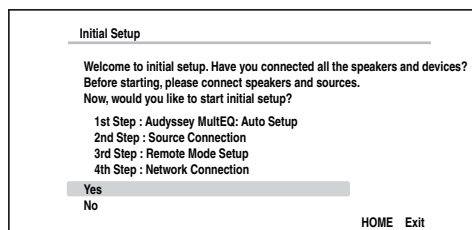

- 1** Use **▲/▼** on the AV receiver or remote controller to select one of the following options, and then press **Enter**.

► **Yes:**

Continues to “**Audyssey MultEQ: Auto Setup**”.

► **No:**

Skips the settings and terminates the initial setup. The setup wizard goes to “Terminating the Initial Setup” (→ **page 22**). You can always restart the initial setup by selecting “**Initial Setup**” in the “**Hardware Setup**” menu (→ **page 67**).

## Audyssey MultEQ: Auto Setup

This step performs the automatic speaker setup.

- 1** Use **▲/▼** to select one of the following options, and then press **Enter**.

► **Do it Now:**

The automatic speaker setup is performed following instructions on screen. Refer to step 2 of “Using the Automatic Speaker Setup” (→ **page 23**). When this setting is complete, the setup wizard continues to “**Source Connection**”.

► **Do it Later:**

Skips this setting.  
Press **Enter** and continue to “**Source Connection**”.

## Source Connection

This step checks the connection of source components.

- 1 Use ▲/▼ to select one of the following options, and then press Enter.**
  - ▶ **Yes, Continue:**  
Performs the checkings.
  - ▶ **No, Skip:**  
Skips this step and continues to “Remote Mode Setup”.
- 2 Select the input selector for which you want to check the connection and press Enter.**  
The picture and sound of the corresponding source should appear on screen with a verification prompt.
- 3 When prompted, use ▲/▼ to select one of the following options and then press Enter.**
  - ▶ **Yes:**  
Confirms that the source is properly displayed.
  - ▶ **No:**  
Displays an error report. Follow the troubleshooting instructions and recheck the source.
- 4 Use ▲/▼ to select one of the following options, and then press Enter.**
  - ▶ **Yes:**  
Returns to step 2.
  - ▶ **No, Done Checking:**  
The setup wizard continues to “Remote Mode Setup”.

## Remote Mode Setup

With this step, you can enter remote control codes for the components you want to operate.

- 1 Use ▲/▼ to select one of the following options, and then press Enter.**
  - ▶ **Yes:**  
Performs the remote control code input. Refer to step 5 of “Looking up for Remote Control Codes” (→ page 72).
  - ▶ **No, Skip:**  
Skips this step and continues to “Network Connection”.
- 2 When you're finished, select one of the following options and press Enter.**
  - ▶ **Yes, Done:**  
The setup wizard continues to “Network Connection”.
  - ▶ **No, not yet:**  
You can enter other remote control codes.

## Network Connection

This step checks your network connection.

- 1 Use ▲/▼ to select one of the following options, and then press Enter.**
  - ▶ **Yes:**  
Performs the checkings.
  - ▶ **No, Skip:**  
Skips this step and terminates the initial setup.

- 2 Follow the instructions on screen to perform the network checking.**

The checking is complete when the message “**Successfully connected.**” appears at the middle of the screen. Press **Enter** to terminate the initial setup.

### Tip

- If you have selected “**Wireless**”, you need to perform the wireless LAN setup. See “Performing Wireless LAN Setup” (→ page 26). This completes the initial setup.

- 3 If an error message appears, select one of the following options and press Enter.**

- ▶ **Retry:**  
Performs the checking again.
- ▶ **No, Do it Later:**  
Skips this step and terminates the initial setup. The setup wizard goes to “Terminating the Initial Setup”.

## Terminating the Initial Setup

This step ends the initial setup process.

- 1 Press Enter.**  
To restart the initial setup, select “**Initial Setup**” in the “**Hardware Setup**” menu (→ page 67).

## Using the Automatic Speaker Setup

With the supplied calibrated microphone, Audyssey MultEQ® automatically determines the number of speakers connected, their size for purposes of bass management, optimum crossover frequencies to the subwoofer (if present), and distances from the primary listening position.

Audyssey MultEQ then removes the distortion caused by room acoustics by capturing room acoustical problems over the listening area in both the frequency and time domain. The result is clear, well-balanced sound for everyone. Audyssey MultEQ can be used with Audyssey Dynamic EQ® and Audyssey Dynamic Volume® (→ **page 57**).

Before using this function, connect and position all of your speakers.

Audyssey MultEQ offers two ways of measuring: the “**Audyssey Quick Start**” and “**Audyssey MultEQ Full Calibration**”.

- “**Audyssey Quick Start**” uses the measurement from one position to perform the speaker setting only.
- “**Audyssey MultEQ Full Calibration**” uses the measurement from six positions to correct room response in addition to the speaker setting.

The more positions are used in measuring, the better the listening environment will become. We recommend using a measurement from six positions to create the best listening environment.

The Quick Start takes 2 minutes and Full Calibration takes about 15 minutes.

Total measurement time varies depending on the number of speakers.

## Measurement procedure


To create a listening environment in your home theater that all listeners will enjoy, Audyssey MultEQ takes measurements at up to six positions within the listening area. Position the microphone at ear height of a seated listener with the microphone tip pointed directly at the ceiling using a tripod. Do not hold the microphone in your hand during measurements as this will produce inaccurate results.

### ■ First measurement position

Also referred to as the Main Listening Position, this refers to the most central position where one would normally sit within the listening environment. Audyssey MultEQ uses the measurements from this position to calculate speaker distance, level, and the optimum crossover value for the subwoofer.

### ■ Second-sixth measurement positions

These are the other listening positions (i.e., the places where the other listeners will sit). You can measure up to six positions.




○ : Listening area

① to ⑥: Listening position

### Note

- Make the room as quiet as possible. Background noise and Radio Frequency Interference (RFI) can disrupt the room measurements. Close windows, televisions, radios, air conditioners, fluorescent lights, home appliances, light dimmers, or other devices. Turn off the cell phone (even if it is not in use) or place it away from all audio electronics.
- The microphone picks up test tones played through each speaker as Audyssey MultEQ Room Correction and Speaker Setup runs.
- Audyssey MultEQ Room Correction and Speaker Setup cannot be performed while a pair of headphones is connected.

- 1 Turn on the AV receiver and the connected TV.**  
On the TV, select the input to which the AV receiver is connected.
- 2 Set the speaker setup microphone at the Main Listening Position ①, and connect it to the Setup Mic jack.**

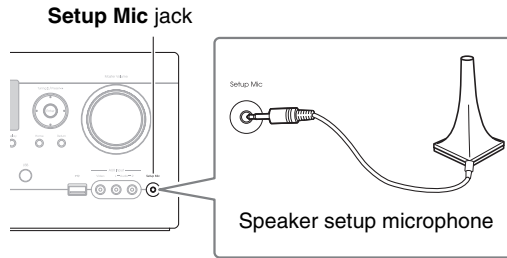


The speaker setting menu appears.

#### Note

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**. If your TV is connected to other video outputs, use the AV receiver's display when changing settings.

- 3 When you've finished making the settings, press Enter.**



Perform the "2. Speaker Setup" according to your speaker configuration:

- **Speakers Type (Front)** (→ page 54)
- **Powered Zone 2** (→ page 54)
- **Surround Back/Front High** (→ page 54)
- **Subwoofer** (→ page 54)

If you use a powered subwoofer(s), go to step 4.  
If not, go to step 5.

- 4 Adjust the subwoofer volume level to 75 dB, and then press Enter.**  
Test tones are played through the subwoofer.  
Use the volume control on the subwoofer.

#### Note

- If your subwoofer does not have a volume control, disregard the displayed level and press **Enter** to proceed to the next step.
- If you set the subwoofer's volume control to its maximum and the level displayed is lower than 75 dB, leave the subwoofer's volume control at its maximum and press **Enter** to proceed to the next step.

- 5 Use ▲/▼ to select "Audyssey Quick Start" or "Audyssey MultEQ Full Calibration", and then press Enter.**

- 6 Press Enter.**

Audyssey MultEQ® Room Correction and Speaker Setup starts.

Test tones are played through each speaker as Audyssey MultEQ Room Correction and Speaker Setup runs. This process takes a few minutes. Please **refrain from talking** during measurements and **do not stand** between speakers and the microphone.

Do not disconnect the speaker setup microphone during Audyssey MultEQ Room Correction and Speaker Setup, unless you want to cancel the setup.


If you select "**Audyssey Quick Start**", you will go to step 9.

- 7 Place the speaker setup microphone at the next position, and then press Enter.**

Audyssey MultEQ performs more measurements. This takes a few minutes.

- 8 When prompted, repeat step 7.**

- 9 Use ▲/▼ to select an option, and then press Enter.**

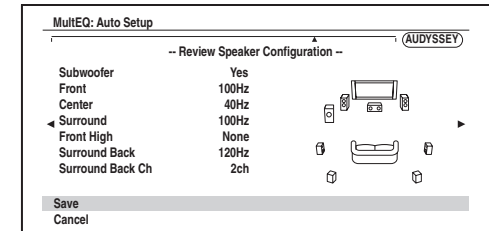

The options are:

#### ► Save:

Save the calculated settings and exit Audyssey MultEQ Room Correction and Speaker Setup.

#### ► Cancel:

Cancel Audyssey MultEQ Room Correction and Speaker Setup.

#### Tip

- You can view the calculated settings for the speaker configuration, speaker distances, and speaker levels by using ◀/▶.

- 10 Use ▲/▼ to select a target, and use ◀/▶ to change the setting.**

After the results of Audyssey MultEQ have been saved, the menu will display the "Audyssey" (→ page 57), "Dynamic EQ" (→ page 57), "Dynamic Volume" (→ page 57) settings.

#### Note

- When "**Audyssey Quick Start**" has been used for measurement, "**Audyssey**" cannot be selected.
- These settings are applied to all input selectors.

- 11 Press Enter.**

- 12 Disconnect the speaker setup microphone.**




**Note**

- You can cancel Audyssey MultEQ® Room Correction and Speaker Setup at any point in this procedure simply by disconnecting the setup microphone.
- Do not connect or disconnect any speakers during Audyssey MultEQ Room Correction and Speaker Setup.
- If the AV receiver is muted, it will be unmuted automatically when Audyssey MultEQ Room Correction and Speaker Setup starts.
- Changes to the room after Audyssey MultEQ Room Correction and Speaker Setup requires you run Audyssey MultEQ Room Correction and Speaker Setup again, as room EQ characteristics may have changed.

**Error Messages**

While Audyssey MultEQ Room Correction and Speaker Setup is in progress, one of the error messages below may appear.

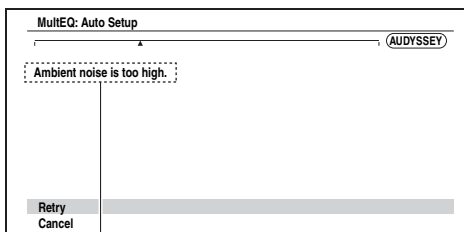

Error message

The options are:

► **Retry:**

Try again.

► **Cancel:**

Cancel Audyssey MultEQ Room Correction and Speaker Setup.

• **Ambient noise is too high.**

The background noise is too loud. Remove the source of the noise and try again.

• **Speaker Matching Error!**

The number of speakers detected was different from that of the first measurement. Check the speaker connection.

• **Writing Error!**

This message appears if saving fails. Try saving again. If this message appears after 2 or 3 attempts, contact the dealer from whom you purchased this unit.

• **Speaker Detect Error**

This message appears if a speaker is not detected. “No” means that no speaker was detected.

**Tip**

- See “Speaker Configuration” for appropriate settings (→ page 11).

The setup of the speaker can be done manually (→ page 54).

The setup of the volume level of each speaker also can be done manually (→ page 55).

**Using a Powered Subwoofer**

If you’re using a powered subwoofer and it outputs very low-frequency sound at a low volume level, it may not be detected by Audyssey MultEQ Room Correction and Speaker Setup.

If the “**Subwoofer**” appears on the “**Review Speaker Configuration**” screen as “**No**”, increase the subwoofer’s volume to the half-way point, set it to its highest crossover frequency, and then try running Audyssey MultEQ Room Correction and Speaker Setup again. Note that if the volume is set too high and the sound distorts, detection issues may occur, so use an appropriate volume level. If the subwoofer has a low-pass filter switch, set it to Off or Direct. Refer to your subwoofer’s instruction manual for details.

## Performing Wireless LAN Setup

A wireless LAN (WLAN) is a local area network that relies on wireless communication.

To achieve a wireless network connection, you will need the following component:

### ■ Access point

Also known as the base station, it links your AV receiver (wireless client) with a PC or network. Access points fall into two categories: the bridge type that only performs data relay in a local area network, or the router type that has a built-in router functionality.

To achieve a wireless network connection, it is necessary to perform the wireless LAN setup. The setup can be done either automatically or manually. You use your AV receiver as a wireless client (wireless terminal) and connect it to a PC or to the Internet.

### Automatic wireless LAN setup

- 1 Press Receiver followed by Home.**
- 2 Use ◀/▶ or ▲/▼ to select “Setup”, and then press Enter.**
- 3 Use ▲/▼ to select “Hardware Setup”, and then press Enter.**
- 4 Use ▲/▼ to select “Network”, and then press Enter.**

- 5 Use ▲/▼ to select “Network Connection”, and ◀/▶ to select “Wireless”, and then press Enter (→ page 66).**

The “Wireless Setup” menu is displayed on screen.

#### Tip

- The same setting is available even if “Wireless” is selected in “Network Connection” in initial setup (→ page 22).

- 6 Press ▲/▼ to select (North American models) “Push Button Configuration (Other Routers)”<sup>\*1</sup>(excluding North American models) “Push Button Configuration (Select from Router)”, and press Enter.**

The method to make settings by “Push Button Configuration” is displayed, providing the following two options:

#### Tip

- <sup>\*1</sup> (North American models) To connect to Linksys E/EA Router, select “Push Button Configuration (Linksys E/EA Router)” and make settings following the instructions on the screen.

### ■ Push Button method

1. Use ▲/▼ to select “Push Button” and then press Enter.
2. Press the WPS button on your Access Point device.

#### Tip

- How long the WPS button should be pressed differs depending on the type of Access Point device. Refer to the instruction manual provided with your Access Point device for operations.

### ■ PIN code method

1. Use ▲/▼ to select “PIN Code” and then press Enter.  
An 8-digit PIN code is displayed. The PIN code is displayed scrolling on the AV receiver’s display.
2. Input the provided code in your Access Point.  
For information on the registration process, please refer to the instruction manual provided with your Access Point device.

- 7 Press Enter to confirm.**

Connection to your Access Point starts and **Wi-Fi** indicator flashes. After the connection to your Access Point is completed, **Wi-Fi** indicator lights and the connection status is displayed on the screen.

This completes the wireless LAN setup.

You can review your setup with the “Status” option on the “Wireless Setup” menu.

#### Note

- If **Wi-Fi** indicator doesn’t light, the connection to your Access Point is not done successfully. Configure this setting again (→ page 81).

## Manual wireless LAN setup

- 1 Press **Receiver** followed by **Home**.
- 2 Use **◀/▶** or **▲/▼** to select **“Setup”**, and then press **Enter**.
- 3 Use **▲/▼** to select **“Hardware Setup”**, and then press **Enter**.
- 4 Use **▲/▼** to select **“Network”**, and then press **Enter**.
- 5 Use **▲/▼** to select **“Network Connection”**, and **◀/▶** to select **“Wireless”**, and then press **Enter** (→ page 66).

The **“Wireless Setup”** menu is displayed on screen.

### Tip

- The same setting is available even if **“Wireless”** is selected in **“Network Connection”** in initial setup (→ page 22).

- 6 Use **▲/▼** to select **“Search Wireless Network”** and then press **Enter**.

A list of available Access Points is displayed.

### Tip

- If Access Point you wish to connect to is not displayed in the list of available Access Points, the setting also can be made by entering **“SSID”**, **“Security”**, and **“Password”** manually after selecting **“Direct Input”**.

- 7 Use **▲/▼** to select the **Access Point** you wish to connect to, and then press **Enter**.

Depending on your encryption settings, the security of your Access Point will provide one of the following patterns:

### ■ WEP method

1. Use **▲/▼** to select **“Default Key ID”** and then press **Enter**.
2. Use **▲/▼** to choose an ID between 1 and 4, and then press **Enter**.
3. Use **▲/▼** to select **“Password”** and then press **Enter**.
4. Use the keyboard on screen to enter the password and confirm with **“OK”**.

### ■ WPA/WPA2 method

1. Use **▲/▼** to select **“Password”** and then press **Enter**.
2. Use the keyboard on screen to enter the password and confirm with **“OK”**.

### ■ No encryption

If your Access Point device is not secured by encryption, there is no need to input any secret key.

### Tip

- When you select the Access Point you wish to connect to from the list of available Access Points, **“SSID”** and **“Security”** are automatically displayed. These settings can be changed manually.

- 8 Select **“OK”** and press **Enter**.

Connection to your Access Point starts and **Wi-Fi** indicator flashes. After the connection to your Access Point is completed, **Wi-Fi** indicator lights and the connection status is displayed on the screen.

This completes the wireless LAN setup.

You can review your setup with the **“Status”** option on the **“Wireless Setup”** menu.

### Note

- If **Wi-Fi** indicator doesn't light, the connection to your Access Point is not done successfully. Configure this setting again (→ page 81).

# Playback

## Playback

This section describes the basic operation such as playback, listening mode, and other useful functions. Reading this manual from the beginning to this section helps you to understand the basic connection/setup/operation.

### ■ Screen Saver

If there is no video signal on the current input source and no operation for a specific time (three minutes by default), a screen saver automatically comes on.


#### Tip

- The time until the screen saver activates itself can be changed in the “**Screen Saver**” setting (→ **page 62**).
- The screen will return to its previous state if the AV receiver is operated.

See also:

- “Playing an Audio from Bluetooth-enabled Device” (→ **page 30**)
- “Playing a USB Device” (→ **page 31**)
- “Listening to TuneIn” (→ **page 31**)
- “Registering Other Internet Radio” (→ **page 33**)
- “Playing Music Files on a Server (DLNA)” (→ **page 33**)

- “Playing Music Files on a Shared Folder” (→ **page 35**)
- “Remote Playback” (→ **page 36**)
- “Listening to AM/FM Radio” (→ **page 37**)
- “Playing Audio and Video from Separate Sources” (→ **page 39**)
- “Controlling Other Components” (→ **page 72**)
- “Using the Onkyo Dock” (→ **page 76**)

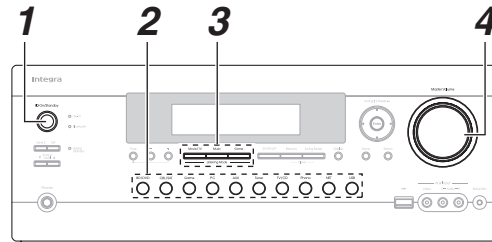

### 1 Turn on the AV receiver, the TV and the AV components.

\* When you operate the AV receiver with the remote controller, press the **Receiver** button first.

### 2 Select the input on the AV receiver to play the AV components.

Press the input selector button to which the AV components to be played is connected.

Press the **TV/CD** button to play the audio of the TV. Switching the input on the TV is also required. Select the input to which the AV receiver is connected by using the TV remote controller.

\* For the CEC compatible TV and the AV components connected with HDMI connections, switching the input is automatically performed. Switch the input manually for other AV components.

### 3 Select the desired listening mode.

You can enjoy various types of listening mode. The listening mode is switched by pressing Listening mode button on the AV receiver or the remote controller.

### 4 Adjust the volume.


You can enjoy the surround sound.

#### Tip

- When listening to an HDMI component through the AV receiver, set the HDMI component so that its video can be seen on the TV screen (on the TV, select the input of the HDMI component connected to the AV receiver). If the TV power is off or the TV is set to another input source, this may result in no sound from the AV receiver or the sound may be cut off.

## Controlling Contents of USB or Network Devices

(→ page 30)

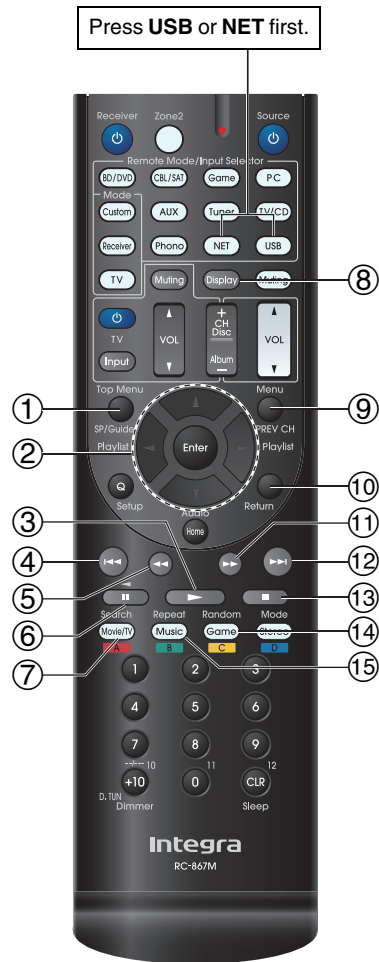

①	<b>Top Menu</b> This button displays the top menu for each media or service.
②	<b>▲/▼ and Enter</b> These buttons navigate through the menus. ◀/▶ This button cycles through pages.
③	<b>▶</b> This button starts playback.
④	<b>◀◀</b> This button selects the beginning of the current song. Pressing this button twice selects the previous song.
⑤	<b>◀◀</b> This button fast-reverses the current song.
⑥	<b>  </b> This button pauses playback.
⑦	<b>Search</b> You can toggle between the playback screen and the list screen during playback.
⑧	<b>Display</b> This button switches between song information during playback. Press this button while the list screen is displayed to return to the playback screen.
⑨	<b>Menu</b> This button displays the menu of Internet radio services.
⑩	<b>Return</b> This button returns to the previous menu.
⑪	<b>▶▶</b> This button fast-forwards the current song.
⑫	<b>▶▶</b> This button selects the next song.
⑬	<b>■</b> This button stops playback.
⑭	<b>Random</b> This button performs random playback.

⑮	<b>Repeat</b> Press this button repeatedly to cycle through the repeat modes.
---	----------------------------------------------------------------------------------

### Tip













- See “Controlling Other Components” about the operation of other components (→ page 72).
- The AV receiver supports Album art display, and displaying image file format of JPEG, PNG, and BMP is possible. The image file format cannot be displayed in either of the following cases:
  - Total number of horizontal and vertical pixels is more than 2048 x 2048.
  - Image data size (JPEG/PNG) is more than 4 MB.

### Note

- The buttons you can use will differ depending on the devices and media used for playback.
- When you select the **NET** input selector on the AV receiver for the first time, “**DISCLAIMER**” screen is displayed on TV. Please read the contents thoroughly before using network service. Select “**Agree**” if you agree with the content. If you disagree, network service is not available on the AV receiver (→ page 85).

## Understanding Icons on the Display

This section describes icons that appear on the AV receiver's display during media playback.

Icon	Description
	Folder
	Track
	Playback
	Pause
	Fast Forward
	Fast Reverse
	Artist
	Album
	Repeat One Track
	Repeat Folder (USB Device)
	Repeat
	Shuffle

## Playing an Audio from Bluetooth-enabled Device

### About the Bluetooth Wireless Technology

Bluetooth wireless technology is a short-range wireless technology that enables wireless data communication between digital devices. Bluetooth wireless technology operates within a range of about 15 meters (49 feet). You do not need to use a cable for connection, nor is it necessary for the devices to face one another, such is the case with infrared technology.

#### Tip

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.
- If your Bluetooth-enabled device supports A2DP protocol, its audio file will play through the AV receiver.
- Connection is not guaranteed for all Bluetooth-enabled devices.

### Operating on the Remote Controller

The Bluetooth-enabled device can be operated by the supplied remote controller.

#### Tip

- To operate your Bluetooth-enabled device by the remote controller, the Bluetooth-enabled device must support profile: AVRCP.
- Operation by the remote controller is not guaranteed for all Bluetooth-enabled devices.

## Pairing the AV receiver with a Bluetooth-enabled device

Pairing is an operation where Bluetooth-enabled devices register with each other beforehand. Use the procedure below to pair the AV receiver with your Bluetooth-enabled device. Once a pairing operation is performed, it does not need to be performed again.

**1 Place the Bluetooth-enabled device within 1 meter (3.3 feet) from the AV receiver.**

**2 Select "BLUETOOTH" in "Input" in Quick Setup, and press Enter (→ page 47).**

**Bluetooth** indicator flashes and the AV receiver is put to pairing mode.

**"Now Pairing"** appears on the AV receiver's display.

#### Tip

- When connecting a Bluetooth-enabled device paired with the AV receiver to the AV receiver, **"BLUETOOTH"** input selector is automatically selected.
- If you connect the AV receiver to another Bluetooth-enabled device, make settings in **"Status"** of **"Bluetooth"** for pairing (→ page 67).
- Some Bluetooth-enabled device may need to re-establish pairing for each connection.

#### Note

- **"BLUETOOTH"** cannot be selected, if you've selected **NET** or **USB** as input selector in Zone 2.

### 3 During this period (about 2 minutes), you can operate the Bluetooth-enabled device to pair with the AV receiver.

#### Note

- When establishing a connection with the AV receiver, select the profile (A2DP, AVRCP) at the Bluetooth-enabled device. If the Bluetooth-enabled device does not support the AVRCP profile, you cannot perform playback or other operations with the AV receiver.

#### Tip

- For details on the Bluetooth connection, refer to the instruction manual of the Bluetooth-enabled device.

### 4 Once the AV receiver is detected and the model name of the AV receiver appears on the display of your Bluetooth-enabled device, select the model name.

When a Bluetooth connection is established successfully, **Bluetooth** indicator will light.

#### Tip

- The model name appeared on the display of your Bluetooth-enabled device is "Integra DTR-30.5".

### 5 If passkey\* is required on the display of the Bluetooth-enabled device, enter "0000".

The AV receiver only supports numerical passkey up to 4 digits.

\* Passkey may be called "Passcode", "PIN code", "PIN number" or "Password".

### 6 Play back the desired music on the Bluetooth-enabled device.

The audio is output from the AV receiver.

#### Tip

- The AV receiver may not work as normal depending on the circumstance even though the AV receiver is placed within the 15 meters range. In such cases, get the Bluetooth-enabled device closer to the AV receiver and retry the operation.

- When disconnecting on your Bluetooth-enabled device, **Bluetooth** indicator on the AV receiver will go off.
- If there is no sound output even after the pairing is done successfully, consult the instruction manual of the Bluetooth-enabled device, and then select the model name of the AV receiver as the audio output device.
- While connected to a Bluetooth-enabled device, the AV receiver cannot be detected and a connection cannot be established from another Bluetooth-enabled device.
- If you cannot connect with a paired Bluetooth-enabled device, perform the pairing operation between the AV receiver and the Bluetooth-enabled device again.

#### Note

- Due to the characteristic of Bluetooth wireless technology, the sound played on the AV receiver may slightly delay from the sound played on the Bluetooth-enabled device.

## Playing a USB Device

#### Tip

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

This section explains how to play music files from a USB device (e.g., USB flash drives and MP3 players).

See also:

- "Network/USB Features" (→ **page 90**).

### 1 Press USB to select the "USB" input.

### 2 Plug your USB device into the AV receiver's USB port.

The **USB** indicator lights. It will flash if the AV receiver cannot read the USB device.

### 3 Press Enter.

A list of the device's contents appears. To open a folder, use **▲/▼** to select it, and then press **Enter**.

### 4 Use **▲/▼** to select a music file, and press **Enter** or **▶** to start playback.

#### Note

- While the message "**Connecting...**" appears on the AV receiver's display, do not disconnect the USB cable supplied with the USB device from the **USB** port.

## Listening to Tuneln

You need to connect the AV receiver to your home network (→ **pages 15, 26**).

#### Tip

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

Tuneln is a new radio service which offers the music, sports and news all over the world.

Over 70,000 radio stations and 2 million on-demand programs are registered, and you can easily enjoy them by selecting stations or programs of your choice. Tuneln is preprogrammed on the AV receiver.

### 1 Press NET.


The network service screen appears, and the **NET** indicator lights. If it flashes, the AV receiver is not connected to the network correctly. If wired LAN connection is selected, verify that the Ethernet cable is firmly connected to the AV receiver. If wireless LAN connection is selected, verify that the **Wi-Fi** indicator lights.

#### Tip

- The same operation can be done by selecting "**Network Service**" in the Home menu.

### 2 Use **▲/▼/◀/▶** to select "Tuneln" and then press **Enter**.

- 3** Use **▲/▼** to select a station or a program, and then press **Enter**.  
Playback starts.

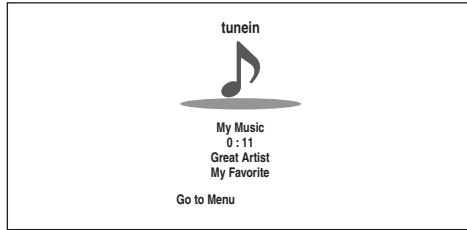

Either of the following menus can be selected by pressing the **Menu** button on the remote controller or pressing **Enter** button to select “**Go to Menu**”.

► **Add to My Presets**

In this menu, stations or programs can be stored in “**My Presets**”.

► **Remove from My Presets**

In this menu, stations or programs stored in “**My Presets**” can be deleted.

► **Report a problem**

This menu is used to report problems on TuneIn service or resolve the problems in a wizard style.

► **View Schedule**

In this menu, program listings of stations or programs can be displayed.

► **Clear recents**

In this menu, all the stations and programs stored in “**Recents**” can be deleted.

► **Add to My Favorites**

In this menu, stations or programs can be stored in “**My Favorites**”.

## Setting an TuneIn account

To create a user account for TuneIn, open a browser window such as Internet Explorer®, and connect to tunein.com website. With a TuneIn account, you can quickly search and browse for stations and programs at tunein.com website and save as your favorites which will automatically appear in your AV receiver My Presets account. If you have a TuneIn account, select “**Login**” and then “**I have a TuneIn account**” on the top list. Enter your user name and password to login.

### Tip

- Select “**Login with a registration code**”, and associate a device from my page on TuneIn website by using a registration code displayed on the screen. This allows you to login without entering a user name and a password.

## Adding TuneIn radio stations or programs to My Favorites/My Presets

There are two ways you can register specific Internet radio stations (programs) from the TuneIn.

### • Adding to My Favorites

The selected program will be added to “**My Favorites**” on the network service screen, which appears when pressing **NET**.

1. Select radio stations or programs, and press **Menu** button on the remote controller.
2. Use **▲/▼** to select “**Add to My Favorites**”, and press **Enter**.
3. Use **▲/▼/◀/▶** to select “**OK**”, and press **Enter**.

### Tip

- You can rename the stations saved in “**My Favorites**” (→ page 33).

### • Adding TuneIn radio stations or programs to My Presets

Select “**TuneIn**”, and press **Enter** button to display a folder of “**My Presets**” on the screen that displays Category/Area, etc. Store your favorite stations or programs in this folder.

1. Select radio stations or programs, and press **Menu** button on the remote controller.
2. Use **▲/▼** to select “**Add to My Presets**”, and press **Enter**.

### Tip

- If no radio stations or programs are stored in “**My Presets**”, “**My Presets**” folder will not be displayed.



## Registering Other Internet Radio

You need to connect the AV receiver to your home network (→ **pages 15, 26**).

### Tip

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

Internet radio URLs in the following formats are supported: PLS, M3U, and podcast (RSS). However, depending on the type of data or audio format used by the Internet radio station, you may not be able to listen to some stations.

To listen to other Internet radio stations, you must register your station in “**My Favorites**” of the network service screen, as described below.

### Note

- Services available may vary depending on the region. See the separate instructions for more information.
- Certain network service or contents available through this device may not be accessible in case the service provider terminates its service.

- 1 Select “Network” on the Setup menu to verify your IP address (→ page 66).**  
Take a note of the IP address.
- 2 On your computer, start your web browser.**
- 3 Enter the AV receiver’s IP address in the browser’s Internet address (URL) field.**  
If you are using Internet Explorer®, you can also enter the URL by selecting “Open...” on the “File” menu.  
Information on the AV receiver is then shown on your Internet browser (Web Setup).
- 4 Click on the “My Favorites” tab, and enter the Internet radio station’s name and URL.**

## 5 Click “Save” to save the Internet radio station.

The Internet radio station is then added to “**My Favorites**”. To play the registered station, press **NET**, and then select “**My Favorites**” on the network service screen. A list of registered Internet radio stations appears. Select the one that you saved and press **Enter**.

### Tip

- If you want to add a new station directly from “**My Favorites**”, select an empty slot in the list and press **Menu**. Then, select “**Create New Station**” and press **Enter**. Pressing **Enter** again will display the keyboard screen. Use that keyboard to enter the station’s name and URL respectively, and then press **Enter**.
- If you want to delete a station saved in “**My Favorites**”, press **Menu** with the station selected or while the station is playing. Then, use **▲/▼** to select “**Delete from My Favorites**” and press **Enter**. You can also delete stations from the Web Setup.
- If you want to rename a station, select the desired station and press **Menu**. Then, use **▲/▼** to select “**Rename this station**” and press **Enter**.
- You can save up to 40 Internet radio stations.

## Changing the Icon Layout on the Network Service Screen

### Tip

- You need to connect your TV to the HDMI output (**HDMI OUT MAIN**) to make the following on-screen setting.

The layout of icons can be customized by switching their positions on the network service screen.

### 1 Press NET.

The network service screen appears.

### Tip

- The same operation can be done by selecting “**Network Service**” in the Home menu.

### 2 Press Mode/D (blue) on the remote controller.

### 3 Use **▲/▼/◀/▶** to select an icon to move, and then press Enter.

### 4 Use **▲/▼/◀/▶** to select another icon as the destination, and then press Enter.

The icons switch positions and the message “**Completed!**” appears.

## Playing Music Files on a Server (DLNA)

You need to connect the AV receiver to your home network (→ **pages 15, 26**).

### Tip

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

This section explains how to play music files on a computer or media server through the AV receiver (Server Playback).

## Windows Media Player Setup

### ■ Windows Media Player 11 Setup

This section explains how to configure Windows Media Player 11 so that the AV receiver can play the music files stored on your computer.

#### 1 Start Windows Media Player 11.

#### 2 On the “Library” menu, select “Media Sharing”.

The “Media Sharing” dialog box appears.

#### 3 Select the “Share my media” check box, and then click “OK”.

A list of the supported devices appears.

#### 4 Select the AV receiver in the list, and then click “Allow”.

The corresponding icon will be checked.

#### 5 Click “OK” to close the dialog box.

This completes the Windows Media Player 11 configuration.

You can now play the music files in your Windows Media Player 11 library through the AV receiver.

#### Tip

- Windows Media Player 11 can be downloaded for free from the Microsoft web site.

### ■ Windows Media Player 12 Setup

This section explains how to configure Windows Media Player 12 so that the AV receiver can play the music files stored on your personal computer.

#### 1 Start Windows Media Player 12.

#### 2 On the “Stream” menu, select “Turn on media streaming”.

A dialog box appears.

#### Tip

- If the media streaming is already activated, clicking on “More streaming options...” in the “Stream” menu will display a list of the playback devices connected to the network. You can skip step 3.

#### 3 Move your cursor and click on “Turn on media streaming”.

A list of media server appears. Wording may vary slightly depending on the network location.

#### 4 On the “Media streaming options”, select the AV receiver and confirm that it is set to “Allowed”.

#### 5 Click “OK” to close the dialog box.

This completes the Windows Media Player 12 configuration.

You can now play the music files in your Windows Media Player 12 library.

## Playing music files on a server (DLNA)

#### 1 Start your computer or media server.

#### 2 Press NET.

The network service screen appears, and the **NET** indicator lights. If it flashes, the AV receiver is not connected to the network correctly. If wired LAN connection is selected, verify that the Ethernet cable is firmly connected to the AV receiver. If wireless LAN connection is selected, verify that the **Wi-Fi** indicator lights.

#### Tip

- The same operation can be done by selecting “**Network Service**” in the Home menu.

#### 3 Use ▲/▼/◀/▶ to select “DLNA”, and press Enter.


#### 4 Use ▲/▼ to select a server, and then press Enter.

The menu is displayed according to the server functions.

#### Note

- The search function does not work with media servers which do not support this function.
- Photos and movies stored on a media server cannot be accessed from the AV receiver.
- Depending on the sharing settings in the media server, the AV receiver may not be able to access the content. See the instruction manual of the media server.

#### 5 Use ▲/▼ to select an item, and then press Enter or ► to start playback.

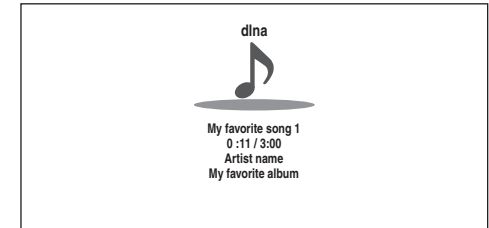

#### Note

- Depending on the media server, ◀◀/▶▶/|| may not work.
- If the message “**No Item.**” appears, this means that no information can be retrieved from the server. In this case, check your server, network, and AV receiver connections.

## Playing Music Files on a Shared Folder

This section explains how to play music files on a computer or NAS (Network Attached Storage) through the AV receiver.

### Windows 8/Windows 7 Setup

#### ■ Setting the sharing options

- 1** Select “Choose homegroup and sharing options” on the Control Panel.
 

**Tip**

  - If this option is not available, verify that “View by:” is set to “Category”.
- 2** Select “Change advanced sharing settings”.
- 3** Under “Home or Work”, verify that the following items are checked:
 

“Turn on network discovery”, “Turn on file and printer sharing”, “Turn on sharing so anyone with network access can read and write files in the Public folders”, and “Turn off password protected sharing”.
- 4** Select “Save changes” and click “OK” on the confirmation screen.

#### ■ Creating a shared folder

- 1** Right-click the folder that you want to share.
- 2** Select “Properties”.
- 3** On the “Sharing” tab, select “Advanced Sharing”.
- 4** Check the check box of “Share this folder” and then click “OK”.
- 5** Under “Network File and Folder Sharing”, select “Share”.
- 6** Select “Everyone” from the pull-down menu, click “Add”, and then click “Share”.
 

**Tip**

  - With this setting, everyone is allowed to access the folder. If you want to assign a user name and password to the folder, make the corresponding settings for “Permissions” in “Advanced Sharing” of the “Sharing” tab.
  - Verify that “Workgroup” is properly set.

**Note**

  - When using NAS (Network Attached Storage), refer to the instruction manual provided with your NAS unit.

## Playing music files on a shared folder

In order to enjoy Home Media, you must first create a shared folder on your computer.

- 1** Press **NET**.
 

The network service screen appears, and the **NET** indicator lights. If it flashes, the AV receiver is not connected to the network correctly. If wired LAN connection is selected, verify that the Ethernet cable is firmly connected to the AV receiver. If wireless LAN connection is selected, verify that the **Wi-Fi** indicator lights.

**Tip**

  - The same operation can be done by selecting “Network Service” in the Home menu.
- 2** Use **▲/▼/◀/▶** to select “Home Media”, and press **Enter**.
- 3** Use **▲/▼** to select a server, and then press **Enter**.
 

**Tip**

  - The server name of your computer can be viewed on the computer properties screen.
- 4** Use **▲/▼** to select the desired shared folder and then press **Enter**.
- 5** When asked for a user name and password, enter the necessary login information.
 

**Tip**

  - The login information will be remembered for the next time you log in.
  - The login information is that of the user account set when creating a shared folder.
- 6** Use **▲/▼** to select a music file and then press **Enter** or **▶**.
 

The playback of the selected file starts.

## Remote Playback

You need to connect the AV receiver to your home network (→ **pages 15, 26**).

### Tip

- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

Remote playback is supported by Windows Media Player 12.

Remote Playback means you can play the music files stored on a media server or personal computer with the AV receiver by operating the controller device in the home network.

## Windows Media Player 12 Setup

This section explains how to configure Windows Media Player 12 so that the AV receiver can play the music files stored on your personal computer.

### 1 Start Windows Media Player 12.

### 2 On the “Stream” menu, select “Turn on media streaming”.

A dialog box appears.

### Tip

- If the media streaming is already activated, clicking on “More streaming options...” in the “Stream” menu will display a list of the playback devices connected to the network. You can skip step 3.

### 3 Move your cursor and click on “Turn on media streaming”.

A list of media server appears. Wording may vary slightly depending on the network location.

### 4 On the “Media streaming options”, select the AV receiver and confirm that it is set to “Allowed”.

### 5 Click “OK” to close the dialog box.

This completes the Windows Media Player 12 configuration.

You can now play the music files in your Windows Media Player 12 library.

### Tip

- On the “Stream” menu, confirm that “Allow remote control of my Player...” is checked.

## Using Remote Playback

### 1 Turn on the AV receiver.

### 2 Start Windows Media Player 12.

To enable remote playback, you must first configure Windows Media Player 12.

### 3 On Windows Media Player 12, right-click on a music file.

The right-click menu appears.

### Tip

- For selecting another media server, select the desired media server from the “Other Libraries” menu on Windows Media Player 12.

### 4 Select the AV receiver in “Remote playback”.

The “Play to” window appears and playback on the AV receiver starts. Operations during remote playback can be made from the “Play to” window of Windows 8/Windows 7 on your personal computer.

A playback screen will be displayed on the connected TV.

### Tip

- If the operating system of your personal computer is Windows 8, click “Play to” and select the AV receiver.

### 5 Adjusting the Volume.

You can adjust the volume by adjusting the volume bar in the “Remote playback” window. The default maximum volume level is 64. If you wish to change this, enter the value from the Web Setup in your browser. Refer to step 3 of “Registering Other Internet Radio” for details (→ **page 33**).

The volume value of the remote window and the volume value of the AV receiver may not always match.

Adjustments you make to the volume in the AV receiver will not be reflected in the “Remote playback” window.

### Note

- Remote playback cannot be used in any of the following cases:
  - Network services are being used.
  - Contents are being played from a USB device.
  - “Agree” is not selected on the “DISCLAIMER” screen displayed on the TV when you select the **NET** input selector on the AV receiver for the first time.

## Listening to AM/FM Radio

This section describes the procedure of using the buttons on the front panel, unless otherwise specified.

### Using the Tuner


With the built-in tuner you can enjoy AM and FM radio stations. You can store your favorite stations as presets for quick selection.

You can also change the frequency steps  
(→ page 63).

#### 1 Press Tuner to select either “AM” or “FM”.

In this example, FM has been selected.

Each time you press **Tuner**, the radio band changes between AM and FM.



(Actual display depends on the country.)

### Tuning into Radio Stations

#### ■ Auto tuning mode

#### 1 Press Tuning Mode so that the AUTO indicator lights on the AV receiver's display.

#### 2 Press Tuning ▲/▼.

Searching stops when a station is found.

When tuned into a station, the **TUNED** indicator lights. When tuned into a stereo FM station, the **FM STEREO** indicator lights as shown.



#### Tip

##### • Tuning into weak FM stereo stations

If the signal from a stereo FM station is weak, it may be impossible to get good reception. In this case, switch to manual tuning mode and listen to the station in mono.

#### ■ Manual tuning mode

In manual tuning mode, FM stations will be in mono.

#### 1 Press Tuning Mode so that the AUTO indicator goes off on the AV receiver's display.

#### 2 Press and hold Tuning ▲/▼.

The frequency stops changing when you release the button.

Press the buttons repeatedly to change the frequency one step at a time.

#### ■ Tuning into stations by frequency

You can tune into AM and FM stations directly by entering the appropriate frequency.

#### 1 On the remote controller, press Tuner repeatedly to select “AM” or “FM”, followed by D.TUN.



(Actual display depends on the country.)

#### 2 Within 8 seconds, use the number buttons to enter the frequency of the radio station.

For example, to tune to 87.5 (FM), press **8, 7, 5** or **8, 7, 5, 0**.

If you have entered the wrong number, you can retry after 8 seconds.

### Presetting AM/FM Stations


You can store a combination of up to 40 of your favorite AM/FM radio stations as presets.

#### 1 Tune into the AM/FM station that you want to store as a preset.

See the previous section.

#### 2 Press Memory.

The preset number flashes.



(Actual display depends on the country.)

#### 3 While the preset number is flashing (about 8 seconds), use Preset ◀/▶ to select a preset from 1 through 40.

#### 4 Press Memory again to store the station or channel.

The station or channel is stored and the preset number stops flashing.

Repeat this procedure for all of your favorite AM/FM radio stations.

#### ■ Selecting Presets

##### 1 To select a preset, use Preset ◀/▶ on the AV receiver, or the remote controller's CH +/-.

###### Tip

- You can also use the remote controller's number buttons to select a preset directly.

#### ■ Deleting Presets

##### 1 Select the preset that you want to delete. See the previous section.

##### 2 While holding down Memory, press Tuning Mode.

The preset is deleted and its number disappears from the AV receiver's display.

#### Using RDS (excluding North American models)

When tuned into an RDS station, the **RDS** indicator lights.

When the station is broadcasting text information, the text can be displayed.

#### ■ What is RDS?

RDS stands for Radio Data System and is a method of transmitting data in FM radio signals. It was developed by the European Broadcasting Union (EBU) and is available in most European countries. Many FM stations use it these days. In addition to displaying text information, RDS can also help you find radio stations by type (e.g., news, sport, rock, etc.).

The AV receiver supports four types of RDS information:

##### PS (Program Service)

When tuned to an RDS station that's broadcasting PS information, the station's name will be displayed. Pressing **Display** will display the frequency for 3 seconds.

##### RT (Radio Text)

When tuned to an RDS station that's broadcasting text information, the text will be shown on the AV receiver's display.

##### PTY (Program Type)

This allows you to search for RDS radio stations by type.

##### TP (Traffic Program)

This allows you to search for RDS radio stations that broadcast traffic information (→ **page 39**).

###### Note

- RDS works only in areas where RDS broadcasts are available.
- In some cases, the text characters displayed on the AV receiver may not be identical to those broadcast by the radio station. Also, unexpected characters may be displayed when unsupported characters are received. This is not a malfunction.
- If the signal from an RDS station is weak, RDS data may be displayed intermittently or not at all.

#### ■ Displaying Radio Text (RT)

##### 1 Press RT/PTY/TP once.

The RT information scrolls across the AV receiver's display.

###### Note

- The message "**Waiting**" may appear while the AV receiver waits for the RT information.
- If the message "**No Text Data**" appears, no RT information is available.

#### ■ Finding Stations by Type (PTY)

You can search for radio stations by type.

##### 1 Press RT/PTY/TP twice.

The current program type appears on the AV receiver's display.

##### 2 Use Preset ◀/▶ to select the type of program you want.

See the table shown later in this chapter.

##### 3 To start the search, press Enter.

The AV receiver searches until it finds a station of the type you specified, at which point it stops briefly before continuing with the search.

##### 4 When a station you want to listen to is found, press Enter.

If no stations are found, the message "**Not Found**" appears.

## ■ Listening to Traffic News (TP)

You can search for stations that broadcast traffic news.

### 1 Press RT/PTY/TP three times.

If the current radio station is broadcasting TP (Traffic Program), “[TP]” will appear on the AV receiver’s display. If “TP” without square brackets appears, this means that the station is not broadcasting TP.

### 2 To locate a station that is broadcasting TP, press Enter.

The AV receiver searches until it finds a station that’s broadcasting TP.

If no stations are found, the message “**Not Found**” appears.

## RDS program types (PTY)

Type	Display
None	None
News reports	News
Current affairs	Affairs
Information	Info
Sport	Sport
Education	Educate
Drama	Drama
Culture	Culture
Science and technology	Science
Varied	Varied
Pop music	Pop M
Rock music	Rock M
Middle of the road music	Easy M
Light classics	Light M
Serious classics	Classics
Other music	Other M
Weather	Weather
Finance	Finance
Children’s programmes	Children
Social affairs	Social
Religion	Religion
Phone in	Phone In
Travel	Travel
Leisure	Leisure
Jazz music	Jazz
Country music	Country
National music	Nation M
Oldies music	Oldies
Folk music	Folk M
Documentary	Document
Alarm test	TEST
Alarm	Alarm!

## Playing Audio and Video from Separate Sources

You can listen to the audio of one input source while watching the video of another. This function takes advantage of the fact that when an audio-only input source (**Phono, TV/CD, Tuner, PC, Game, CBL/SAT, BD/DVD**) is selected, the video input source remains unchanged. The following procedure shows how to listen to a CD player’s audio source connected to **TV/CD IN** while watching a Blu-ray Disc/DVD player’s video source connected to **BD/DVD**.

### Tip

- To use an input selector as audio-exclusive, you must assign all video inputs to “- - - -” (→ **pages 52, 53**).

### 1 Press BD/DVD.

### 2 Press TV/CD.

The audio output changes to the CD source, but the video of previously-selected **BD/DVD** is retained.

### 3 Start playback on your Blu-ray Disc/DVD and CD players.

You can now enjoy watching your Blu-ray Disc/DVD with the sound of your CD player.


## Using the Listening Modes

### About Listening Modes

The AV receiver's listening modes can transform your listening room into a movie theater or concert hall, with high fidelity and stunning surround sound.

### Selecting Listening Modes

#### ■ Listening Mode Buttons

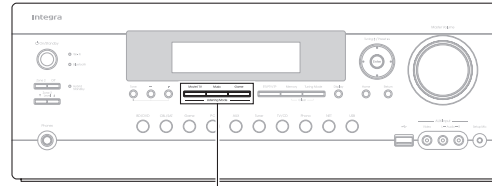

Movie/TV, Music, Game

#### Movie/TV button

This button selects the listening modes intended for use with movies and TV.

#### Music button

This button selects the listening modes intended for use with music.

#### Game button

This button selects the listening modes intended for use with video games.

#### Stereo button

This button selects the Stereo listening mode and All Channel Stereo listening mode.

#### Note

- The Dolby Digital and DTS listening modes can only be selected if your Blu-ray Disc/DVD player is connected to the AV receiver with a digital audio connection (coaxial, optical, or HDMI).
- The listening modes you can select depends on the format of the input signal. To check the format, see “Displaying Source Information” (→ **page 44**).
- While a pair of headphones is connected, you can select the following listening modes: Mono, Direct, and Stereo.




## Input Source

The following audio formats are supported by the listening modes.

<b>MONO</b>	This is mono (monophonic) sound.
<b>STEREO</b>	This is stereo (stereophonic) sound. Two independent audio signal channels are reproduced through two speakers.
<b>5.1ch</b>	This is 5.1-channel surround sound. This surround system has five main channels of sound and a sixth subwoofer channel (called the point-one channel).
<b>7.1ch</b>	This is 7.1-channel surround sound. This is a further sound enhancement to 5.1-channel sound with two additional speakers that provide greater sound envelopment and more accurate positioning of sounds.
<b>DTS-ES</b>	This is DTS-ES surround sound. This surround system can produce a discrete or a matrix-encoded sixth channel from existing DTS 5.1 encoded material.
<b>DJEX</b>	This is Dolby Digital EX surround sound. This provides a center back surround channel from 5.1-channel sources.

## Speaker Layout

The illustration shows which speakers are activated in each channel. See “Speaker Configuration” for the speaker setup (→ page 54).

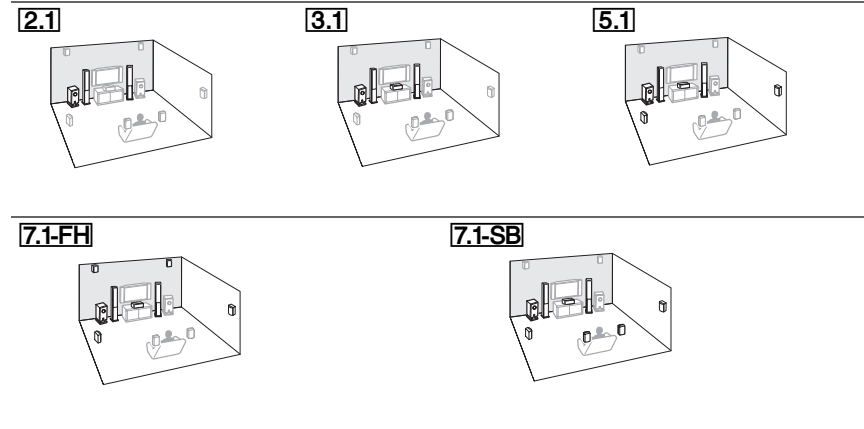

## Onkyo-Original DSP Listening Modes

Listening Mode	Description	Input Source	Speaker Layout
<b>Orchestra</b> <i>Orchestra</i>	Suitable for classical or operatic music, this mode emphasizes the surround channels in order to widen the stereo image, and simulates the natural reverberation of a large hall.	<b>MONO</b> <b>STEREO</b> <b>5.1ch</b> <b>7.1ch</b> <b>DTS-ES</b> <b>DJEX</b>	<b>5.1</b> <b>7.1</b>
<b>Unplugged</b> <i>Unplugged</i>	Suitable for acoustic instruments, vocals and jazz, this mode emphasizes the front stereo image, giving the impression of being right in front of the stage.		
<b>Studio-Mix</b> <i>Studio-Mix</i>	Suitable for rock or pop music, listening to music in this mode creates a lively sound field with a powerful acoustic image, like being at a club or rock concert.		
<b>TV Logic</b> <i>TV Logic</i>	This mode adds realistic acoustics to TV shows produced in a TV studio, surround effects to the entire sound, and clarity to voices.		
<b>Game-RPG</b> <i>Game-RPG</i>	In this mode, the sound has a dramatic feel with a similar atmosphere to Orchestra mode.		
<b>Game-Action</b> <i>Game-Action</i>	In this mode, sound localization is distinct with emphasis on bass.		
<b>Game-Rock</b> <i>Game-Rock</i>	In this mode, sound pressure is emphasized to heighten live feel.		
<b>Game-Sports</b> <i>Game-Sports</i>	Suitable for audio source with much reverberation.		
<b>All Ch Stereo</b> <i>All Ch Stereo</i>	Ideal for background music, this mode fills the entire listening area with stereo sound from the front, surround, and surround back speakers.		<b>3.1</b> <b>5.1</b> <b>7.1</b>
<b>Full Mono</b> <i>Full Mono</i>	In this mode, all speakers output the same sound in mono, so the sound you hear is the same regardless of where you are within the listening room.		

Listening Mode	Description	Input Source	Speaker Layout
<b>T-D (Theater-Dimensional)</b> <i>T-D</i>	With this mode you can enjoy a virtual surround sound even with only two or three speakers. This works by controlling how sounds reach the listener's left and right ears. Good results may not be possible if there's too much reverb, so we recommend that you use this mode in an environment with little or no natural reverb.	<b>MONO</b> <b>STEREO</b> <b>5.1ch</b> <b>7.1ch</b> <b>DTS-ES</b> <b>DDiEX</b>	<b>2.1</b> <b>3.1</b> <b>5.1</b> <b>7.1</b>

### ■ Listening Modes

Listening Mode	Description	Input Source	Speaker Layout
<b>Direct</b> <i>Direct</i>	In this mode, audio from the input source is output without surround-sound processing. The speaker configuration (presence of speakers) and speaker distance settings are enabled, but much of the processing set via the audio setup is disabled. See "On-screen Setup" for more details (→ <b>page 47</b> ).	<b>MONO</b> <b>STEREO</b> <b>5.1ch</b> <b>7.1ch</b> <b>DTS-ES</b> <b>DDiEX</b>	<b>2.1</b> <b>3.1</b> <b>5.1</b> <b>7.1</b> *1
<b>Stereo</b> <i>Stereo</i>	Sound is output from the front left and right speakers and subwoofer.		<b>2.1</b> <b>3.1</b> <b>5.1</b> <b>7.1</b>
<b>Mono</b> <i>Mono</i>	Use this mode when watching an old movie with a mono soundtrack, or use it with the foreign language soundtracks recorded in the left and right channels of some movies. It can also be used with DVDs or other sources containing multiplexed audio, such as karaoke DVDs.		
<b>Multichannel</b> <i>Multich</i>	This mode is for use with PCM multichannel sources.	<b>5.1ch</b> <b>7.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b>

Listening Mode	Description	Input Source	Speaker Layout
<b>DSD</b> *2 <i>DSD</i>	In this mode, audio from the input source is output without surround-sound processing. The speaker configuration (presence of speakers), crossover frequency, speaker distance, A/V Sync and much of the processing set via the audio setup are enabled. See "On-screen Setup" for more details (→ <b>page 47</b> ).	<b>5.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b>
<b>Dolby Digital</b> <i>Dolby D</i>			
<b>Dolby Digital Plus</b> *3 <i>Dolby D +</i>		<b>5.1ch</b> <b>7.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b> <b>3.1</b> <b>5.1</b> <b>7.1</b> *1
<b>Dolby TrueHD</b> <i>Dolby TrueHD</i>		<b>5.1ch</b> <b>7.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b> <b>3.1</b> <b>5.1</b> <b>7.1</b> *1
<b>DTS</b> <i>DTS</i>		<b>5.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b>
<b>DTS-HD High Resolution Audio</b> <i>DTS-HD HR</i>		<b>5.1ch</b> <b>7.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b> <b>3.1</b> <b>5.1</b> <b>7.1</b> *1
<b>DTS-HD Master Audio</b> <i>DTS-HD MSTR</i>		<b>5.1ch</b> <b>7.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b> <b>3.1</b> <b>5.1</b> <b>7.1</b> *1
<b>DTS Express</b> <i>DTS Express</i>		<b>5.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b>
<b>DTS 96/24</b> *4 <i>DTS 96/24</i>		<b>5.1ch</b>	<b>3.1</b> <b>5.1</b> <b>7.1</b>
<b>DTS-ES Discrete</b> *5 <i>ES Discrete</i>		<b>DTS-ES</b>	<b>7.1-SB</b>



### Note

- \*1 Based on the audio channel signal contained in the source, the corresponding speakers will output the sound.
- \*2 The AV receiver can input the DSD signal from HDMI IN. Depending on the player, setting the output on the player side to PCM might bring better sound.
- \*3 For the Blu-ray Discs, Dolby Digital is used in a 3.1/5.1-channel speaker system.
- \*4 DTS is used depending on the configuration of the AV receiver.
- \*5 If there are no surround back speakers, DTS is used.
- \*6 If there are no surround back speakers, Dolby Pro Logic II is used.

The listening mode may not be selected depending on the input signal. The signal input from the external AV components can be displayed by the function as follows.

## Displaying Source Information


You can display various information about the current input source as follows.

### 1 Press Receiver once followed by Display repeatedly to cycle through the available information.

#### Tip

- Alternatively, you can use **Display** on the AV receiver.

The following information can be typically displayed.

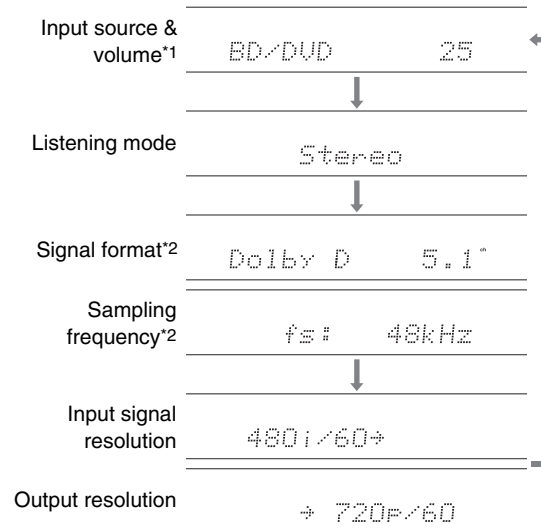

\*1 When AM or FM radio is used, the band, preset number, and frequency are displayed.

\*2 If the input signal is digital, the signal format is displayed. Information is displayed for about three seconds, then the previously displayed information reappears.

## Using the Sleep Timer

With the sleep timer, you can set the AV receiver to turn off automatically after a specified period.

### 1 Press Receiver once followed by Sleep repeatedly to select the required sleep time.

The sleep time can be set from 90 to 10 minutes in 10 minute steps.

The **SLEEP** indicator lights on the AV receiver's display when the sleep timer has been set. The specified sleep time appears for about 5 seconds, then the previous display reappears.

#### Tip

- If you need to cancel the sleep timer, press **Sleep** repeatedly until the **SLEEP** indicator goes off.
- To check the time remaining until the AV receiver sleeps, press **Sleep**. Note that if you press again on **Sleep** as the time being displayed is 10 minutes or less, the sleep timer will go off.

## Setting the Display Brightness

You can adjust the brightness of the AV receiver's display.

- 1 **Press Receiver once followed by Dimmer repeatedly to switch between: normal, dim, or dimmer brightness.**

### Tip

- **(North American models)** Alternatively, you can use **Dimmer** on the AV receiver.

## Changing the Input Display

When you connect an **RI**-capable Integra/Onkyo component, you must configure the input display so that **RI** can work properly.

This setting can be done only from the front panel.

- 1 **Press TV/CD or Game.**  
“**TV/CD**” or “**GAME**” appears on the AV receiver's display.

- 2 **Press and hold down the same button (about 3 seconds) to change the input display.**

Repeat this step to select the desired input display.

■ **TV/CD:**      TV/CD → DOCK  
                          ↑    TAPE    ↓

■ **Game:**      GAME ↔ DOCK

### Note

- “**DOCK**” can be selected for the “**TV/CD**” or “**GAME**” input selector, but not at the same time.
- Enter the appropriate remote control code before using the remote controller for the first time (→ **page 73**).

## Muting the AV Receiver

You can temporarily mute the output of the AV receiver.

- 1 **Press Receiver followed by Muting.**  
The output is muted and the **MUTING** indicator flashes on the AV receiver's display.

### Tip

- To unmute, press **Muting** again or adjust the volume.
- Muting is automatically cancelled when the AV receiver is set to standby.

## Using the Home Menu

The Home menu provides quick access to frequently used menus.

### Tip


- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

### 1 Press Receiver followed by Home.

The Home menu will be superimposed on the TV screen.

### Tip

- Alternatively, you can use **Home** on the AV receiver.

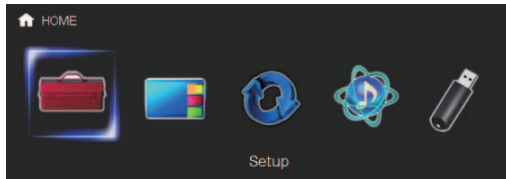

### 2 Use ◀/▶ or ▲/▼ and Enter to make the desired selection.

Press **Home** to close the menu.

#### ■ Setup

- ▶ With this selection, you can access the common settings of the on-screen Setup menu.

Press **Enter** to display the Setup menu (→ **page 50**).

### Tip

- You can also access frequently used settings from Quick Setup (→ **page 47**).

#### ■ InstaPrevue

- ▶ With this selection, you can preview audio/video streams coming from HDMI inputs (**HDMI IN 1/2/3/4/5**). Even with multiple components

connected through HDMI, you can easily switch between inputs as their previews are displayed on a single screen.

Press **Enter** to display the main preview (currently selected HDMI input) and the additional previews (other HDMI inputs). Using **▲/▼** or **◀/▶** to select a preview thumbnail and pressing **Enter** will switch the AV receiver to that input source.

### Tip

- If no video signals are present, the thumbnails will be filled in black.
- You can specify the number of preview thumbnails as well as their positioning on screen (→ **page 65**).

### Note

- This function cannot be selected when:
  - **HDMI IN 6** is the current HDMI input source, or
  - No signal is present on the current input source.
- Depending on video signals, the picture may not be properly rendered on the preview thumbnails of InstaPrevue.

#### ■ Firmware Update

- ▶ With this selection, you can update the firmware of the AV receiver. Note that this selection will be grayed out for a short while after the AV receiver is turned on. Please wait until it becomes operable.

Press **Enter** to start the procedure (→ **page 86**).

#### ■ Network Service

You need to connect the AV receiver to your home network (→ **page 15, 26**).

- ▶ With this selection, you can use various Internet radio services or play the contents stored in media connected to your home network (→ **pages 31 to 35**). Note that this selection will be grayed out for

a short while after the AV receiver is turned on. Please wait until it becomes operable.

Press **Enter** to display the network service screen. If you want to use the Internet radio services, use **▲/▼/◀/▶** to select the desired service. Pressing **Enter** again switches to that selection. If you want to play music files on a computer or media server, use **▲/▼/◀/▶** to select "**DLNA**" and then press **Enter**. If you want to play music files on a computer or NAS (Network Attached Storage), use **▲/▼/◀/▶** to select "**Home Media**" and then press **Enter**.

#### ■ USB

- ▶ With this selection, you can play contents of portable players and USB storage devices connected to the AV receiver's **USB** port (→ **page 31**). Note that this selection will be grayed out for a short while after the AV receiver is turned on. Please wait until it becomes operable.

Press **Enter** to select a drive or browse the contents of the media connected, followed by **▲/▼** to select the desired folder or track. Pressing **Enter** as a track is selected will start playback.

# Advanced Operations

## On-screen Setup

This section describes the procedure for using the remote controller unless otherwise specified.

With the AV receiver connected to a TV, there are two ways of changing the settings on-screen: using the Quick Setup or the Setup Menu (**Home**).

### ■ Quick Setup

The Quick Setup provides quick access to frequently used settings. You can change settings and view the current information.

### ■ Setup menu (Home)

The Setup menu (**Home**) provides a convenient way to change the AV receiver's various settings. Settings are organized into 9 categories.

#### Tip


- The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

## Using the Quick Setup



### 1 Press Receiver followed by Q Setup.

The Quick Setup will be superimposed on the TV screen.

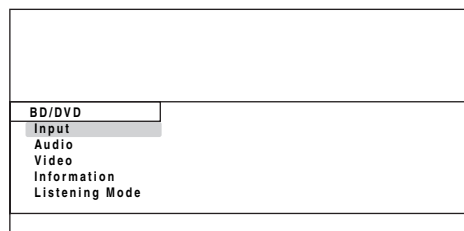

### 2 Use ▲/▼ and Enter to make the desired selection.

Press **Q Setup** to close the menu.

Press **Return** to return to the previous menu.

### ■ Input\*1

- ▶ You can select input sources and view the following information: the name of input selectors, input assignments, the name of the device paired with the AV receiver via Bluetooth, radio information, and ARC function setting.

In addition, previews of the video streams coming from HDMI inputs (**HDMI IN 1/2/3/4/5**) are displayed.\*2

Use **▲/▼** to select an input source and view the related information. Pressing **Enter** switches to the selected input source.

### ■ Audio (→ page 48)

- ▶ You can change the following settings: **"Bass"**, **"Treble"**, **"Phase Matching Bass"**, **"Subwoofer Level"**, **"Center Level"**, **"Audyssey"**, **"Dynamic EQ"**, **"Dynamic Volume"**, **"Late Night"**, **"Music Optimizer"** and **"Cinema Filter"**.

### ■ Video\*3

- ▶ You can change the following settings: **"Wide Mode"** and **"Picture Mode"**\*4.

See also:

- "Picture Adjust" (→ page 59)

### ■ Information\*5

- ▶ You can view the information of the following items: **"Audio"**, **"Video"** and **"Tuner"**.

### ■ Listening Mode\*6

- ▶ You can select the listening modes that are grouped in the following categories: **"MOVIE/TV"**, **"MUSIC"**, **"GAME"**.

Use **▲/▼** to select the category and **◀/▶** to select the listening mode. Press **Enter** to switch to the selected listening mode.

#### Note

\*1 **"BLUETOOTH"** cannot be selected, if you've selected **NET** or **USB** as input selector in Zone 2.

\*2 • The video preview is not displayed when:  
– **HDMI IN 6** is the current HDMI input source, or  
– No signal is present on the current input source.  
• The video of the currently-selected input is displayed on the main screen, not on a preview thumbnail.

\*3 • When the **"Monitor Out"** setting is set to **"Sub"**, **"Video"** cannot be selected (→ page 51).

- This setting cannot be used with the “NET”, “USB” and “BLUETOOTH” input selectors.
- \*4 Only when you have selected “Custom” in the “Picture Mode” (→ page 59), pressing **Enter** allows you to adjust the following items via the Quick Setup: “Brightness”, “Contrast”, “Hue” and “Saturation”. Press **Return** to return to the “Picture Mode” setting.
- \*5 Depending on the input source and listening mode, not all channels shown here output the sound.
- \*6 • This setting is not available in either of the following cases:
  - The “Audio TV Out (Main)” setting is set to “On” (→ page 64) or “Audio TV Out (Sub)” setting is set to “On” (→ page 64) and you’re listening through your TV speakers.
  - “HDMI CEC (RIHD)” is set to “On” (→ page 63) and you’re listening through your TV speakers.

## Explanatory Notes

### ① — ■ Phase Matching Bass



- ① Setting target
- ② Setting options (default setting underlined)

## Using the Audio Settings of Quick Setup

You can change various audio settings from the Quick Setup (→ page 47).

### Note

- These settings are not available in either of the following cases:
  - The “Audio TV Out (Main)” setting is set to “On” (→ page 64) or “Audio TV Out (Sub)” setting is set to “On” (→ page 64) and you’re listening through your TV speakers.
  - “HDMI CEC (RIHD)” is set to “On” (→ page 63) and you’re listening through your TV speakers.

## Tone Control

### ■ Bass

- ▶ **–10dB to 0dB to +10dB** in 2 dB steps.  
You can boost or cut low-frequency sounds output from the front speakers.

### ■ Treble

- ▶ **–10dB to 0dB to +10dB** in 2 dB steps.  
You can boost or cut high-frequency sounds output from the front speakers.

You can adjust the bass and treble for the front speakers, except when Direct listening mode is selected.

## Operating on the AV receiver

- 1 Press **Tone** repeatedly to select either “Bass” or “Treble”.
- 2 Use **–** and **+** to adjust.

## Phase Matching Bass

### ■ Phase Matching Bass

- ▶ **Off**
- ▶ **On**

From the warm low notes produced by a cello to the deep frequencies of electronic music, a good audio system should be able to deliver plenty of bass resonance.

While traditional enhancement systems effectively boost low-frequency sound, they are often prone to the effects of phase shifting, which can overwhelm mid-range frequencies and muddy the sound. Our Phase-Matching Bass Boost technology effectively preserves mid-range clarity-allowing vocals and strings to shine-while maintaining a smooth, powerful bass response at all volume levels.

### Note

- The Phase Matching Bass is disabled when the Direct listening mode is selected.
- If the “Subwoofer” setting is set to “No”, this setting is fixed to “Off”.

## Operating on the AV receiver

- 1 Press **Tone** repeatedly to select “PM Bass”.
- 2 Use **–** and **+** to change the setting.



## Speaker Levels

### ■ Subwoofer Level

▶ **-15dB** to **0dB** to **+12dB** in 1 dB steps.

### ■ Center Level

▶ **-12dB** to **0dB** to **+12dB** in 1 dB steps.

You can adjust the volume of each speaker while listening to an input source.

These temporary adjustments are cancelled when the AV receiver is set to standby. To save the setting you made here, go to “Level Calibration” (→ **page 55**) before setting the AV receiver to standby.

#### Note

- You cannot use these function while the AV receiver is muted.
- These settings cannot be used while a pair of headphones is connected.
- Speakers that are set to “**No**” or “**None**” in “Speaker Configuration” (→ **page 54**) cannot be adjusted.

## Audyssey®

### ■ Audyssey

See “Audyssey” in “4. Source Setup” (→ **page 57**).

### ■ Dynamic EQ

See “Dynamic EQ” in “4. Source Setup” (→ **page 57**).

### ■ Dynamic Volume

See “Dynamic Volume” in “4. Source Setup” (→ **page 57**).

#### Note

- These technologies can be used when all the following conditions are met:
  - Room Correction and Speaker Setup is completed. Note that “**Audyssey**” requires the “**Audyssey MultEQ Full Calibration**” method.
  - Any listening mode other than Direct is selected.
  - A pair of headphones is not connected.
- The setting is stored individually for each input selector.

## Late Night

### ■ Late Night

For **Dolby Digital** and **Dolby Digital Plus** sources, the options are:

#### ▶ Off

#### ▶ Low:

Small reduction in dynamic range.

#### ▶ High:

Large reduction in dynamic range.

For **Dolby TrueHD** sources, the options are:

#### ▶ Auto:

The Late Night function is set to “**On**” or “**Off**” automatically.

#### ▶ Off

#### ▶ On

Turn this setting on to reduce the dynamic range of Dolby Digital material so that you can still hear quiet parts even when listening at low volume levels—ideal for watching movies late at night when you don’t want to disturb anyone.

#### Note

- The effect of the Late Night function depends on the material that you are playing and the intention of the original sound designer, and with some material there will be little or no effect when you select the different options.
- The Late Night function can be used only when the input source is Dolby Digital, Dolby Digital Plus, or Dolby TrueHD.
- The Late Night function is set to “**Off**” when the AV receiver is set to standby. For Dolby TrueHD sources, it will be set to “**Auto**”.
- With Dolby TrueHD sources, the Late Night function cannot be used when “**TrueHD Loudness Management**” is set to “**Off**”.

## Music Optimizer

### ■ Music Optimizer

#### ▶ Off

#### ▶ On

The Music Optimizer function enhances the sound quality of compressed music files. When set to “**On**”, the **M.Opt** indicator lights on the AV receiver’s display.

#### Note

- The Music Optimizer function only works with PCM digital audio input signals with a sampling rate below 48 kHz and analog audio input signals. When **NET** or **USB** input selector is selected, this function even works with digital audio input signals with a sampling rate below 48 kHz (except DSD signals and Dolby TrueHD signals) regardless of the PCM digital audio input signals with a sampling rate below 48 kHz.
- The Music Optimizer is disabled when the Direct listening mode is selected.
- The setting is stored individually for each input selector.

## CinemaFILTER

### ■ Cinema Filter

#### ▶ Off

#### ▶ On

Turn this setting on to soften overly bright movie soundtracks, which are typically mixed for reproduction in a movie theater.

CinemaFILTER can be used with the following listening modes: Dolby Digital, Dolby Digital EX, Dolby Digital Plus, Dolby TrueHD, Dolby Pro Logic IIx Movie, Dolby Pro Logic II Movie, Dolby Pro Logic IIz Height, Multichannel, DTS, DTS-ES, DTS Neo:6 Cinema, DTS 96/24, DTS Neo:6, DTS-HD High Resolution Audio, DTS-HD Master Audio and DTS Express.

#### Note

- The CinemaFILTER may not work when used with certain input sources.

## Using the Setup Menu (Home)



- 1** Press **Receiver** followed by **Home**.
- 2** Use **◀/▶** or **▲/▼** to select “Setup”, and then press **Enter**.
- 3** Use **▲/▼** to select a main menu item, and then press **Enter**.
- 4** Use **▲/▼** to select a sub menu item, and then press **Enter**.
- 5** Use **▲/▼** to select a setting target, and use **◀/▶** to change the setting.  
Press **Home** to close the menu.  
Press **Return** to return to the previous menu.

### Note

- This procedure can also be performed on the AV receiver by using **Home**, the cursor buttons, and **Enter**.
- During Audyssey MultEQ® Room Correction and Speaker Setup, messages, etc., that are displayed on the TV screen will appear on the AV receiver's display.

## Setup Menu Items

Main menu item	Sub menu item
<b>1. Input/Output Assign</b> (→ page 51)	Monitor Out HDMI Input Component Video Input Composite Video Input Digital Audio Input
<b>2. Speaker Setup</b> (→ page 53)	Speaker Settings Speaker Configuration Speaker Distance Level Calibration
<b>3. Audio Adjust</b> (→ page 55)	Multiplex/Mono Dolby DTS Theater-Dimensional
<b>4. Source Setup</b> (→ page 57)	Audyssey IntelliVolume A/V Sync Name Edit Picture Adjust Audio Selector
<b>5. Listening Mode Preset</b> (→ page 61)	BD/DVD CBL/SAT GAME PC AUX TUNER TV/CD PHONO NET USB BLUETOOTH

Main menu item	Sub menu item
<b>6. Miscellaneous</b> (→ page 62)	Volume Setup OSD Setup 12V Trigger A Setup 12V Trigger B Setup 12V Trigger C Setup
<b>7. Hardware Setup</b> (→ page 63)	Multi Zone Tuner HDMI Auto Standby Network Initial Setup
<b>8. Remote Controller Setup</b> (→ page 67)	Remote ID Remote Mode Setup
<b>9. Lock Setup</b> (→ page 67)	Setup

## Explanatory Notes


### ① 2. Speaker Setup

### ② Speaker Configuration

### ③ Subwoofer

- ④ Yes  
No

- ① Main Menu  
② Sub Menu  
③ Setting target  
④ Setting options (default setting underlined)

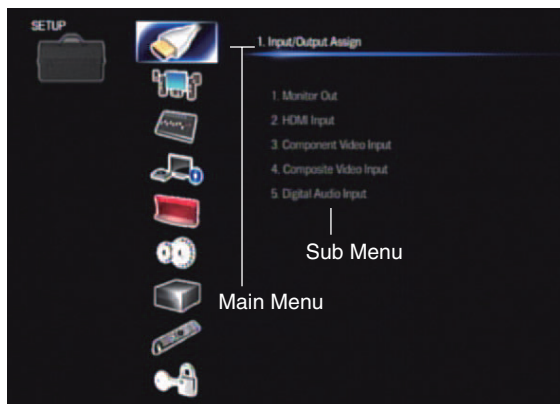


## 1. Input/Output Assign

### Monitor Out

On the “**Monitor Out**” settings, you can select whether or not to have the video sources’ images output through the HDMI output.

If you connect your TV to HDMI output, “**Monitor Out**” setting is automatically set and composite video and component video sources are upconverted\* and output.

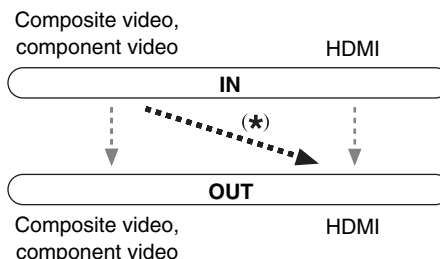

#### Note

- See “The video and audio signal flow” (→ **page 16**) for charts showing how the “**Monitor Out**” and “**Resolution**” settings affect the video signal flow through the AV receiver.

### Monitor Out

#### ► Main:

Select this if your TV is connected to **HDMI OUT MAIN**.

#### ► Sub:

Select this if your TV is connected to **HDMI OUT SUB**.

#### ► Both:

Select this if your TVs are connected to **HDMI OUT MAIN** and **HDMI OUT SUB**. Video signals are output from both HDMI outputs at the resolution supported by both TVs.

#### Note

- The “**HDMI Through**” setting is only available for the **HDMI OUT MAIN** jack (→ **page 64**).

### Resolution

#### ► Through:

Select this to pass video through the AV receiver at the same resolution and with no conversion.

#### ► Auto:

Select this to have the AV receiver automatically convert video at resolutions supported by your TV.

#### ► 480p (480p/576p), 720p, 1080i, 1080p\*1:

Select the desired output resolution.

#### ► 4K:

Select this for an output resolution four times that of 1080p. Depending on the resolution supported by your TV, it will result in either 3840 × 2160 or 4096 × 2160 pixels.

You can specify the output resolution for **HDMI OUT MAIN** and have the AV receiver upconvert the picture resolution as necessary to match the resolution supported by your TV.

#### Tip

- You can see the picture by pressing **Enter** to check the “**Resolution**” setting for **HDMI OUT MAIN** (excluding “**NET**”, “**USB**” and “**BLUETOOTH**” input source).

#### Note


- With some TVs, video signals are processed in the same way as “**Through**” when this setting is set to “**4K**”.
- If the “**Monitor Out**” setting is set to “**Sub**”, this setting is fixed to “**Through**”.
- If the “**Monitor Out**” setting is set to “**Both**”, this setting is fixed to “**Auto**”.

\*1 When signal is 1080p input at 24 frames per second, it will be 1080p output at 24 frames per second.

## HDMI Input

If you connect a video component to an HDMI input, you must assign that input to an input selector. For example, if you connect your Blu-ray Disc/DVD player to **HDMI IN 1**, you must assign “**HDMI1/MHL**” to the “**BD/DVD**” input selector.

If you’ve connected your TV to the AV receiver with an HDMI cable, composite video and component video sources can be upconverted\* and output by the HDMI output. You can set this for each input selector by selecting the “-----” option, but the video signal coming from the HDMI output depends on the assignments of “**Component Video Input**” and “**Composite Video Input**”. See “The video and audio signal flow” for more information on video signal flow and upconversion (→ **page 16**).

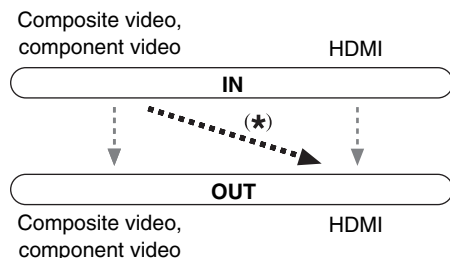

Here are the default assignments.

Input selector	Default assignment
BD/DVD	HDMI2
CBL/SAT	HDMI3
GAME	HDMI4
PC	HDMI5
AUX	HDMI1/MHL
TV/CD	-----
PHONO	-----

## BD/DVD, CBL/SAT, GAME, PC, AUX, TV/CD, PHONO

### ▶ HDMI1/MHL, HDMI2, HDMI3, HDMI4, HDMI5, HDMI6:

Select the input to which the component has been connected.

### ▶ -----:

Output composite video and component video sources from the HDMI output. The video signal coming from the HDMI output depends on the assignments of “**Component Video Input**” and “**Composite Video Input**”.

Each HDMI input cannot be assigned to two input selectors or more. When **HDMI1 - HDMI6** have already been assigned, you must first set any unused input selectors to “-----” or you will be unable to assign **HDMI1 - HDMI6** to other input selectors.

### Note

- If no video component is connected to the HDMI input (even if the HDMI input is assigned), the AV receiver selects the video source based on the setting of “**Component Video Input**” and “**Composite Video Input**”.
- When an **HDMI IN** is assigned to an input selector as explained here, the same **HDMI IN** will be set as a priority in the “**Digital Audio Input**”. In this case, if you want to use the coaxial or optical audio input, make the appropriate selection in the “**Audio Selector**” setting (→ **page 60**).
- Do not assign an **HDMI IN** to the **TV/CD** selector while “**HDMI CEC (RIHD)**” is set to “**On**” (→ **page 63**), otherwise appropriate CEC (Consumer Electronics Control) operation will not be guaranteed.
- If you assign “-----” to an input selector that is currently selected in “**HDMI Through**” (→ **page 64**), the “**HDMI Through**” setting will be automatically switched to “**Off**”.
- In order for the AV receiver to upconvert component input to HDMI output, the source output must be set to 480i/576i. When signal is input at resolution of 480p/576p and more, error message will be displayed.

## Component Video Input

If you connect a video component to a component video input, you must assign that input to an input selector. For example, if you connect your Blu-ray Disc/DVD player to **COMPONENT VIDEO IN 2**, you must assign “**IN2**” to the “**BD/DVD**” input selector. Here are the default assignments.

Input selector	Default assignment
BD/DVD	IN1
CBL/SAT	IN2
GAME	-----
PC	-----
AUX	-----
TV/CD	-----
PHONO	-----

## BD/DVD, CBL/SAT, GAME, PC, AUX, TV/CD, PHONO

### ▶ IN1, IN2:

Select the input to which the component has been connected.

### ▶ -----:

Output composite video sources from the HDMI output. The upconverted output from HDMI depends on the assignment of “**Composite Video Input**”.

### Note

- When composite video and component video sources are upconverted for **HDMI OUT SUB**, only signals with a resolution of 480i/576i are output and the resolution remains the same. If your TV doesn’t support this resolution, there will be no picture (→ **page 85**).

## Composite Video Input

If you connect a component to a composite video input, you must assign that input to an input selector. If you switch the input to “**TV/CD**” with its default assignment, the audio of “**TV/CD**” is output while the video of the previously-selected source is displayed. Here are the default assignments.

Input selector	Default assignment
BD/DVD	IN1
CBL/SAT	IN2
GAME	IN3
PC	IN4
AUX	FRONT (Fixed)
TV/CD	-----
PHONO	-----

### ■ BD/DVD, CBL/SAT, GAME, PC, TV/CD, PHONO

#### ▶ IN1, IN2, IN3, IN4:

Select the input to which the component has been connected.

#### ▶ -----:

The composite video is not input.

#### Note

- “**AUX**” is used only for input from the front panel.
- Using these inputs as audio-exclusive allows you to enjoy audio and video from separate inputs. Refer to “Playing Audio and Video from Separate Sources” for details (→ page 39).

## Digital Audio Input

If you connect a component to a digital audio input, you must assign that input to an input selector. For example, if you connect your CD player to the **COAXIAL IN 1**, you must assign “**COAXIAL1**” to the “**TV/CD**” input selector.

Here are the default assignments.

Input selector	Default assignment
BD/DVD	COAXIAL1
CBL/SAT	COAXIAL2
GAME	-----
PC	-----
AUX	-----
TV/CD	OPTICAL
PHONO	-----

### ■ BD/DVD, CBL/SAT, GAME, PC, AUX, TV/CD, PHONO

#### ▶ COAXIAL1, COAXIAL2, OPTICAL:

Select the input to which the component has been connected.

#### ▶ -----:

Select if the component is connected to an analog audio input.

#### Note

- When an **HDMI IN** is assigned to an input selector in “**HDMI Input**” (→ page 52), the same **HDMI IN** will be set as a priority in this assignment. In this case, if you want to use the coaxial or optical audio input, make the appropriate selection in the “**Audio Selector**” (→ page 60).
- Supported sampling rates for PCM signals (stereo/mono) from a digital input (optical and coaxial) are 32/44.1/48/88.2/96 kHz/16, 20, 24 bit.

## 2. Speaker Setup

Here you can check the settings made by Audyssey MultEQ® Room Correction and Speaker Setup function, or set them manually, which is useful if you change one of the connected speakers after using Audyssey MultEQ Room Correction and Speaker Setup function (→ page 23).

#### Note

- These settings are not available in either of the following cases:
  - a pair of headphones is connected.
  - The “**Audio TV Out (Main)**” setting is set to “**On**” (→ page 64) or “**Audio TV Out (Sub)**” setting is set to “**On**” (→ page 64) and you’re listening through your TV speakers.
  - “**HDMI CEC (RIHD)**” is set to “**On**” (→ page 63) and you’re listening through your TV speakers.

## Speaker Settings

If you change these settings, you must run Audyssey MultEQ Room Correction and Speaker Setup again (→ page 23).

If you bi-amp the front speakers, you must change the “**Speakers Type (Front)**” setting. For details on speaker wire connection, see “Bi-amping the Front Speakers” (→ page 13).

#### Note

- When bi-amping is used, the AV receiver is able to drive up to 5.1 speakers in the main room.
- Before you change these settings, turn down the volume.

### ■ Speaker Impedance (Australian models)

#### ▶ 4ohms:

Select if the impedance of any speaker is 4 ohms or more but less than 6.

### ► 6ohms:

Select if the impedances of all speakers are between 6 and 16 ohms.

#### Note

- (North American models) Speakers with an impedance of less than 6 ohms are not supported.

### ■ Speakers Type (Front)

#### ► Normal:

Select this if you've connected your front speakers normally.

#### ► Bi-Amp:

Select this if you've bi-amped your front speakers.

### ■ Powered Zone 2

#### ► No

#### ► Yes:

Zone 2 speakers can be used (Powered Zone 2 enabled).

#### Note

- If the "Speakers Type (Front)" setting is set to "Bi-Amp", Powered Zone 2 cannot be used.
- When the "Powered Zone 2" setting is set to "Yes" and Zone 2 is turned on, the surround back and front high speakers cannot be used.

## Speaker Configuration

This setting is set automatically by Audyssey MultEQ® Room Correction and Speaker Setup function (→ [page 23](#)).

With these settings, you can specify which speakers are connected and a crossover frequency for each speaker. Specify "Full Band" for speakers that can output low frequency bass sounds adequately, for example, speakers with a good sized woofer. For smaller speakers, specify a crossover frequency. Sounds below the crossover frequency will be output

by the subwoofer instead of the speaker. Refer to your speaker's manuals to determine the optimum crossover frequencies.

### ■ Subwoofer

#### ► Yes

#### ► No

### ■ Front

#### ► Full Band

► 40Hz, 45Hz, 50Hz, 55Hz, 60Hz, 70Hz, 80Hz, 90Hz, 100Hz, 110Hz, 120Hz, 130Hz, 150Hz, 200Hz

#### Note

- If the "Subwoofer" setting is set to "No", the "Front" setting is fixed at "Full Band".

### ■ Center\*<sup>1</sup>, Surround\*<sup>1</sup>

#### ► Full Band

► 40Hz, 45Hz, 50Hz, 55Hz, 60Hz, 70Hz, 80Hz, 90Hz, 100Hz, 110Hz, 120Hz, 130Hz, 150Hz, 200Hz

#### ► None

### ■ Front High\*<sup>1</sup>\*<sup>2</sup>\*<sup>3</sup>\*<sup>5</sup>

#### ► Full Band

► 40Hz, 45Hz, 50Hz, 55Hz, 60Hz, 70Hz, 80Hz, 90Hz, 100Hz, 110Hz, 120Hz, 130Hz, 150Hz, 200Hz

#### ► None

### ■ Surround Back\*<sup>1</sup>\*<sup>2</sup>\*<sup>3</sup>\*<sup>4</sup>

#### ► Full Band

► 40Hz, 45Hz, 50Hz, 55Hz, 60Hz, 70Hz, 80Hz, 90Hz, 100Hz, 110Hz, 120Hz, 130Hz, 150Hz, 200Hz

#### ► None

#### Note

- \*<sup>1</sup> "Full Band" can be selected only when "Full Band" is selected in the "Front" setting.

- \*<sup>2</sup> If the "Surround" setting is set to "None", this setting cannot be selected.

- \*<sup>3</sup> If the "Speakers Type (Front)" setting is set to "Bi-Amp", or the "Powered Zone 2" setting is set to "Yes" together with Zone 2 turned on, this setting cannot be selected.

- \*<sup>4</sup> If anything else than "None" is selected in "Front High", this setting is automatically set to "None".

- \*<sup>5</sup> If anything else than "None" is selected in "Surround Back", this setting is automatically set to "None".

### ■ Surround Back Ch

#### ► 1ch:

Select if only one surround back speaker L is connected.

#### ► 2ch:

Select if two (left and right) surround back speakers are connected.

#### Note

- If the "Surround Back" setting is set to "None", this setting cannot be selected.

### ■ LPF of LFE

(Low-Pass Filter for the LFE Channel)

► 80Hz, 90Hz, 100Hz, 110Hz, 120Hz

#### ► Off:

Low-Pass Filter is not applied.

With this setting, you can specify the cutoff frequency of the LFE channel's low-pass filter (LPF), which can be used to filter out unwanted hum. The LPF only applies to sources that use the LFE channel.

### ■ Double Bass

This setting is **NOT** set automatically by Audyssey MultEQ Room Correction and Speaker Setup function (→ [page 23](#)).

▶ **On**▶ **Off**

Turn this setting on to boost bass output by feeding bass sounds from the front left, right, and center channels to the subwoofer. Default setting: “- - -”

**Note**

- When the “**Subwoofer**” setting is set to “**No**” or the “**Front**” setting to anything other than “**Full Band**”, this setting is fixed to “- - -”.
- This setting is set to “**On**” automatically when the “**Subwoofer**” and “**Front**” settings are set for the first time to “**Yes**” and “**Full Band**” respectively.

## Speaker Distance

This setting is set automatically by Audyssey MultEQ® Room Correction and Speaker Setup function (→ **page 23**).

Here you can specify the distance from each speaker to the listening position so that the sound from each speaker arrives at the listener’s ears as the sound designer intended.

■ **Unit**▶ **feet:**

Distances can be set in feet. Range: **0.2ft** to **30.0ft** in 0.2 foot steps.

▶ **meters:**

Distances can be set in meters. Range: **0.06m** to **9.00m** in 0.06 meter steps.

(The default setting varies from country to country.)

### ■ Left, Front High Left, Center, Front High Right, Right, Surround Right, Surround Back Right, Surround Back Left, Surround Left, Subwoofer

- ▶ Specify the distance from each speaker to your listening position.

**Note**

- Speakers that you set to “**No**” or “**None**” in “Speaker Configuration” cannot be selected (→ **page 54**).
- When the “**Powered Zone 2**” setting is set to “**Yes**” and Zone 2 is turned on, the surround back and front high speakers cannot be used.

## Level Calibration

This setting is set automatically by Audyssey MultEQ Room Correction and Speaker Setup function (→ **page 23**).

Here you can adjust the level of each speaker with the built-in test tone so that the volume of each speaker is the same at the listening position.

### ■ Left, Front High Left, Center\*1, Front High Right, Right, Surround Right, Surround Back Right, Surround Back Left, Surround Left

- ▶ **-12dB** to **0dB** to **+12dB** in 1 dB steps.

■ **Subwoofer\*1**

- ▶ **-15dB** to **0dB** to **+12dB** in 1 dB steps.

**Note**

- These settings cannot be calibrated when the AV receiver is muted.
- Speakers that you set to “**No**” or “**None**” in “Speaker Configuration” cannot be selected (→ **page 54**).
- When the “**Powered Zone 2**” setting is set to “**Yes**” and Zone 2 is turned on, the surround back and front high speakers cannot be used.

\*1 For the center speaker and subwoofer, the level settings made by using the Quick Setup are saved in this menu (→ **page 49**).

**Tip**

- If you’re using a handheld sound level meter, adjust the level of each speaker so that it reads 75 dB SPL at the listening position, measured with C-weighting and slow reading.

## 3. Audio Adjust

With the Audio Adjust functions and settings, you can adjust the sound and listening modes as you like.

### Multiplex/Mono

■ **Multiplex**

## Input Channel

▶ **Main**▶ **Sub**▶ **Main/Sub**

This setting determines which channel of a stereo multiplex source is output. Use it to select audio channels or languages with multiplex sources, multilingual TV broadcasts, and so on.

■ **Mono**

## Input Channel

▶ **Left + Right**▶ **Left**▶ **Right**

This setting specifies the channel to be used for playing any 2-channel digital source such as Dolby Digital, or 2-channel analog/PCM source in the Mono listening mode.

### Dolby

■ **PL IIx Music (2ch Input)**

These settings apply to only 2-channel stereo sources.

If you’re not using any surround back speakers, these settings apply to Dolby Pro Logic II, not Dolby Pro Logic IIx.

## Panorama

▶ **On**▶ **Off**

With this setting, you can broaden the width of the front stereo image when using the Dolby Pro Logic IIx Music listening mode.

### Dimension

► **-3 to 0 to +3**

With this setting, you can move the sound field forward or backward when using the Dolby Pro Logic IIx Music listening mode. Higher settings move the sound field backward. Lower settings move it forward. If the stereo image feels too wide, or there's too much surround sound, move the sound field forward to improve the balance. Conversely, if the stereo image feels like it's in mono, or there's not enough surround sound, move it backward.

### Center Width

► **0 to 3 to 7**

With this setting, you can adjust the width of the sound from the center speaker when using the Dolby Pro Logic IIx Music listening mode. Normally, if you're using a center speaker, the center channel sound is output from only the center speaker. (If you're not using a center speaker, the center channel sound will be distributed to the front left and right speakers to create a phantom center.) This setting controls the front left, right, and center mix, allowing you to adjust the weight of the center channel sound.

### ■ PL IIx Height Gain

► **Low**

► **Mid**

► **High**

The Height Gain Control in Dolby Pro Logic IIx enables the listener to select how much gain is applied to the front high speakers. There are three settings, "**Low**", "**Mid**" and "**High**", and the front high speakers are accentuated in that order. While "**Mid**" is the default listening setting, the listener may adjust the Height Gain Control to their personal preference.

### Note

- If the "**Front High**" settings is set to "**None**" (→ page 54), this setting cannot be selected.
- If the "**Powered Zone 2**" setting is set to "**Yes**" and Zone 2 is turned on, this setting cannot be selected.

### ■ Dolby EX

#### ► Auto:

If the source signal contains a Dolby EX flag, the Dolby EX listening mode is used.

#### ► Manual:

You can select any available listening mode.

This setting determines how Dolby EX encoded signals are handled. This setting is unavailable if no surround back speakers are connected. This setting is effective with Dolby Digital, Dolby Digital Plus and Dolby TrueHD only.

### Note

- If the "**Surround Back**" setting is set to "**None**" (→ page 54), this setting cannot be selected.
- If the "**Powered Zone 2**" setting is set to "**Yes**" and Zone 2 is turned on, this setting cannot be selected.
- If the "**Front High**" setting is enabled (→ page 54), this setting is fixed to "**Manual**".

### ■ TrueHD Loudness Management

#### ► Off

#### ► On

This setting specifies whether or not to apply the Late Night processing on a Dolby TrueHD source.

### Note

- When this setting is set to "**Off**", the Late Night function for Dolby TrueHD sources is automatically fixed to "**Off**".

## DTS

### ■ Neo:6 Music

#### Center Image

► **0 to 2 to 5**

The DTS Neo:6 Music listening mode creates 6-channel surround sound from 2-channel stereo sources. With this setting, you can specify by how much the front left and right channel output is attenuated in order to create the center channel. Changing the value from "**0**" to "**5**" will spread the sound of the center channel to left and right (outwards).

## Theater-Dimensional

### ■ Listening Angle


#### ► Wide:

Select if the listening angle is greater than 30 degrees.

#### ► Narrow:

Select if the listening angle is less than 30 degrees.

With this setting, you can optimize the Theater-Dimensional listening mode by specifying the angle of the front left and right speakers relative to the listening position. Ideally, the front left and right speakers should be equidistant from the listening position and at an angle close to one of the two available settings.

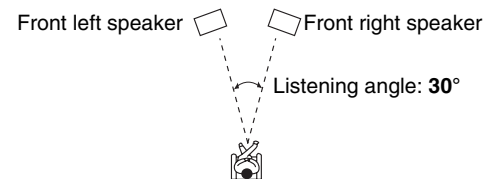



**Note**

- For best results, we recommend setting “**Narrow**” to 20° and “**Wide**” to 40°.

## 4. Source Setup

Items can be set individually for each input selector. Press the input selector buttons to select an input source.

### Audyssey®

The tone for each speaker is set automatically by Audyssey MultEQ® Room Correction and Speaker Setup. To enable the following settings, you must first perform the Room Correction and Speaker Setup (→ **page 23**).

- These technologies cannot be used when a pair of headphones is connected.

#### ■ Audyssey

##### ▶ **Off**

Select this setting for movie material.  
The **Audyssey** indicator will light.

##### ▶ **Music**

Select this setting for music material.  
The **Audyssey** indicator will light.

**Note**

- When “**Audyssey Quick Start**” has been used for measurement, “**Audyssey**” cannot be selected.
- Audyssey equalizing does not work with DSD sources.

#### ■ Dynamic EQ

##### ▶ **Off**

##### ▶ **On**:

Audyssey Dynamic EQ® becomes active.

The **Dynamic EQ** indicator will light.

With Audyssey Dynamic EQ, you can enjoy great sound even when listening at low volume levels. Audyssey Dynamic EQ solves the problem of deteriorating sound quality as volume is decreased by taking into account human perception and room acoustics. It does so by selecting the correct frequency response and surround volume levels moment-by-moment so that the content sounds the way it was created at any volume level — not just at reference level.

#### ■ Reference Level

##### Audyssey Dynamic EQ Reference Level Offset

##### ▶ **0dB**:

This should be selected for movie contents.

##### ▶ **5dB**:

Select this setting for content that has a very wide dynamic range, such as classical music.

##### ▶ **10dB**:

Select this setting for jazz or other music that has a wider dynamic range. This setting should also be selected for TV content as that is usually mixed at 10 dB below film reference.

##### ▶ **15dB**:

Select this setting for pop/rock music or other program material that is mixed at very high listening levels and has a compressed dynamic range.

Movies are mixed in rooms calibrated for film reference. To achieve the same reference level in a home theater system each speaker level must be adjusted so that –30 dBFS band-limited (500 Hz to 2000 Hz) pink noise produces 75 dB sound pressure level at the listening position. A home theater system automatically calibrated by Audyssey MultEQ® will

play at reference level when the master volume control is set to the 64 position. At that level you can hear the mix as the mixers heard it.

Audyssey Dynamic EQ is referenced to the standard film mix level. It makes adjustments to maintain the reference response and surround envelopment when the volume is turned down from 64. However, film reference level is not always used in music or other non-film content. Audyssey Dynamic EQ Reference Level Offset provides three offsets from the film level reference (5 dB, 10 dB, and 15 dB) that can be selected when the mix level of the content is not within the standard.

**Note**

- If “**Dynamic EQ**” setting is set to “**Off**”, this technology cannot be used.

#### ■ Dynamic Volume

##### ▶ **Off**

##### ▶ **Light**:

Activates Light Compression Mode.

##### ▶ **Medium**:

Activates Medium Compression Mode.

##### ▶ **Heavy**:

Activates Heavy Compression Mode. This setting affects volume the most. It quiets the loud parts, such as explosions, and boosts the quiet parts so they can be heard.

**Note**

- If you make Dynamic Volume active, “**Dynamic EQ**” is set to “**On**”. The **Dynamic Vol** indicator will light.
- When “**Dynamic EQ**” is set to “**Off**”, “**Dynamic Volume**” is automatically switched to “**Off**”.

## About Audyssey Dynamic EQ®

Audyssey Dynamic EQ solves the problem of deteriorating sound quality as volume is decreased by taking into account human perception and room acoustics. Dynamic EQ selects the correct frequency response and surround levels moment-by-moment at any user-selected volume setting. The result is bass response, tonal balance and surround impression that remain constant despite changes in volume. Dynamic EQ combines information from incoming source levels with actual output sound levels in the room, a prerequisite for delivering a loudness correction solution. Audyssey Dynamic EQ works in tandem with Audyssey MultEQ® to provide well-balanced sound for every listener at any volume level.

## About Audyssey Dynamic Volume®

Audyssey Dynamic Volume solves the problem of large variations in volume level between television programs, commercials, and between the soft and loud passages of movies. Dynamic Volume looks at the preferred volume setting by the user and then monitors how the volume of program material is being perceived by listeners in real time to decide whether an adjustment is needed. Whenever necessary, Dynamic Volume makes the necessary rapid or gradual adjustments to maintain the desired playback volume level while optimizing the dynamic range. Audyssey Dynamic EQ is integrated into Dynamic Volume so that as the playback volume is adjusted automatically, the perceived bass response, tonal balance, surround impression and dialog clarity remain the same whether watching movies, flipping between television channels or changing from stereo to surround sound content.

## IntelliVolume

### ■ IntelliVolume

► **-12dB to 0dB to +12dB** in 1 dB steps

With IntelliVolume, you can set the input level for each input selector individually. This is useful if one of your source components is louder or quieter than the others.

Use ◀/▶ to set the level.

If a component is noticeably louder than the others, use ◀ to reduce its input level. If it's noticeably quieter, use ▶ to increase its input level.

#### Note

- IntelliVolume does not work for Zone 2.

## A/V Sync

### ■ A/V Sync

► **0msec to 800msec** in 5 msec steps

When using progressive scanning on your Blu-ray Disc/DVD player, you may find that the picture and sound are out of sync. With this setting, you can correct this by delaying the audio signals.

Press **Enter** to view the TV picture while setting the delay when the video source is output to **HDMI OUT MAIN**.

To return to the previous screen, press **Return**.

The range of values you can adjust will depend on whether your TV or display supports HDMI Lip Sync and if the "**Lip Sync**" setting is set to "**On**" or not (→ **page 65**).

#### Note

- This setting is not available in either of the following cases:
  - The "**Audio TV Out (Main)**" setting is set to "**On**" (→ **page 64**) or "**Audio TV Out (Sub)**" setting is set to "**On**" (→ **page 64**) and you're listening through your TV speakers.

– "**HDMI CEC (RIHD)**" is set to "**On**" (→ **page 63**) and you're listening through your TV speakers.

- A/V Sync is disabled when the Direct listening mode is used with an analog input source.
- This setting cannot be used with the "**NET**", "**USB**" and "**BLUETOOTH**" input selectors.

## Name Edit


You can enter a custom name for each individual input selector and radio preset for easy identification. When entered, the custom name will appear on the display.

The custom name is edited using the keyboard screen.

### ■ Name

- 1 Use ▲/▼/◀/▶ to select a character, and then press Enter.**  
Repeat this step to enter up to 10 characters.
- 2 To store a name when you're done, be sure to select "OK" by using ▲/▼/◀/▶, and then press Enter.**

## Name input area

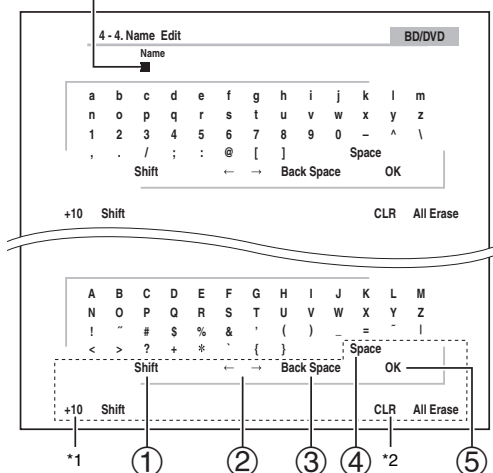

- ① Toggles between lower and upper case characters.\*1
- ② Moves the cursor left or right in the Name input area.
- ③ Moves the cursor backward and deletes one character.\*2
- ④ Enters a space character.
- ⑤ Confirms your entry.

## Tip

- To name a radio preset, use **Tuner** to select AM or FM, and then select the preset (→ page 37).
- To restore a name to its default, erase all characters with **CLR**, select **OK** and then press **Enter**.

\*1 This can also be performed by using **+10** on the remote controller.

\*2 Press **CLR** on the remote controller to delete all the characters you have input.

## Note

- This setting cannot be used for the **“NET”**, **“USB”** and **“BLUETOOTH”** input selectors.

## Picture Adjust


Using Picture Adjust, you can adjust the picture quality and reduce any noise appearing on the screen.

Press **Enter** to view the TV picture while setting when the video source is output to **HDMI OUT MAIN**. To return to the previous screen, press **Return**.


## ■ Wide Mode\*1\*6

This setting determines the aspect ratio.


## ▶ 4:3:




## ▶ Full:



## ▶ Zoom:



## ▶ Wide Zoom:



## ▶ Auto:

According to the input signals and monitor output setting, the AV receiver automatically selects the **“4:3”**, **“Full”**, **“Zoom”** or **“Wide Zoom”**

mode. See **“Monitor Out”** for details on the monitor output setting (→ page 51).

## ■ Picture Mode\*1

## ▶ Custom:

All settings can be performed manually.

## ▶ Cinema:

Select when the picture source is a movie or alike.

## ▶ Game:

Select when the video source is a game console.

## ▶ Standard:

Does not adjust picture quality (changes resolution).

## ▶ Bypass:

Does not adjust picture quality (does not change resolution).

With **“Picture Mode”**, you can change the following settings to be suitable for the movie or game screen by one operation: **“Game Mode”**, **“Film Mode”**, **“Edge Enhancement”**, **“Noise Reduction”**, **“Brightness”**, **“Contrast”**, **“Hue”**, **“Saturation”** or **“Color Temperature”**.

## ■ Game Mode\*2\*3\*4

## ▶ Off

## ▶ On

If video signal delay occurs during playback on a video component (i.e., game console), select the corresponding input source and set the **“Game Mode”** setting to **“On”**. The delay will decrease but in return the picture quality will become poor.

## ■ Film Mode\*2\*4

### ▶ Video:

“Film Mode” detection is not applied and the input signal is handled as a video source.

### ▶ Auto:

Detects whether the input signal is a video or a movie. If it is a movie, the appropriate conversion is applied.

The AV receiver will adjust to the picture source, automatically converting it to the appropriate progressive signal and reproducing the natural quality of the original picture.

## ■ Edge Enhancement\*2\*4\*5

### ▶ Off

### ▶ Low

### ▶ Mid

### ▶ High

With this setting, you can make the picture appear sharper.

## ■ Noise Reduction\*2\*4\*5

### ▶ Off

### ▶ Low

### ▶ Mid

### ▶ High

With this setting, you can reduce noise appearing on the screen. Select the desired level.

## ■ Brightness\*1\*2\*4

### ▶ -50 to 0 to +50

With this setting, you can adjust the picture brightness. “-50” is the darkest. “+50” is the brightest.

## ■ Contrast\*1\*2\*4

### ▶ -50 to 0 to +50

With this setting, you can adjust contrast. “-50” is the least. “+50” is the greatest.

## ■ Hue\*1\*2\*4

### ▶ -50 to 0 to +50

With this setting, you can adjust the color hue between “-50” and “+50”.

## ■ Saturation\*1\*2\*4

### ▶ -50 to 0 to +50

With this setting, you can adjust saturation. “-50” is the weakest color. “+50” is the strongest color.

## ■ Color Temperature\*2\*4

### ▶ Warm

### ▶ Normal

### ▶ Cool

With this setting, you can adjust the color temperature.

### Note

- “Picture Adjust” cannot be used when:

- The “NET”, “USB” or “BLUETOOTH” input selector is selected, or
- “Monitor Out” is set to “Sub”.

\*1 This procedure can also be performed on the remote controller by using the Quick Setup (→ page 47).

\*2 When the “Picture Mode” setting is set to anything other than “Custom”, this setting cannot be used.

\*3 If the “Resolution” setting is set to “4K” (→ page 51), this setting is fixed at “Off”.

\*4 Press CLR if you want to reset to the default value.

\*5 If the “Game Mode” setting is set to “On”, this setting is fixed at “Off”.

\*6 When a 3D video source is input, “Wide Mode” is fixed to “Full”.

## Audio Selector

### ■ Audio Selector

#### ▶ ARC:

The audio signal from your TV tuner can be sent to **HDMI OUT MAIN** of the AV receiver.\*1

With this selection, the TV’s audio can be automatically selected as a priority among other assignments.

#### ▶ HDMI:

This can be selected when **HDMI IN** has been assigned as an input source. If both HDMI (**HDMI IN**) and digital audio inputs (**COAXIAL IN** or **OPTICAL IN**) have been assigned, HDMI input is automatically selected as a priority.

#### ▶ COAXIAL:

This can be selected when **COAXIAL IN** has been assigned as an input source. If both coaxial and HDMI inputs have been assigned, coaxial input is automatically selected as a priority.

#### ▶ OPTICAL:

This can be selected when **OPTICAL IN** has been assigned as an input source. If both optical and HDMI inputs have been assigned, optical input is automatically selected as a priority.

#### ▶ Analog:

The AV receiver always outputs analog signals. You can set priorities of audio output when there are both digital and analog inputs.

### Note

- This setting can be made only for an input source that is assigned to **HDMI IN**, **COAXIAL IN**, or **OPTICAL IN**.
- This setting cannot be used with the “NET”, “USB” and “BLUETOOTH” input selectors.

\*1 You can select “ARC” if you select the **TV/CD** input selector. But you cannot if you’ve selected “Off” in the “Audio Return Channel” setting (→ page 65).

## Setting the Incoming Digital Signal (Fixed Mode)

### ■ Fixed Mode

#### ▶ Off:

The format is detected automatically. If no digital input signal is present, the corresponding analog input is used instead.

#### ▶ PCM:

Only 2-channel PCM format input signals will be heard. If the input signal is not PCM, the **PCM** indicator will flash and noise may also be produced.

#### ▶ DTS:

Only DTS (but not DTS-HD) format input signals will be heard. If the input signal is not DTS, the **dts** indicator will flash and there will be no sound.

When **"HDMI"**, **"COAXIAL"** or **"OPTICAL"** is selected in the **"Audio Selector"** setting, you can then specify the signal type in **"Fixed Mode"**.

Normally, the AV receiver detects the signal format automatically. However, if you experience either of the following issues when playing PCM or DTS material, you can manually set the signal format to PCM or DTS.

- If the beginnings of tracks from a PCM source are cut off, try setting the format to PCM.
- If noise is produced when fast forwarding or reversing a DTS CD, try setting the format to DTS.

#### Note


- The setting will be reset to **"Off"** when you change the setting in **"Audio Selector"**.

## 5. Listening Mode Preset

You can assign a default listening mode to each input source that will be selected automatically when you select each input source. For example, you can set the default listening mode to be used with Dolby Digital input signals. You can select other listening modes during playback, but the mode specified here will be resumed once the AV receiver has been set to standby.

### 1 Use ▲/▼ to select the input source that you want to set, and then press Enter.

The following menu appears.

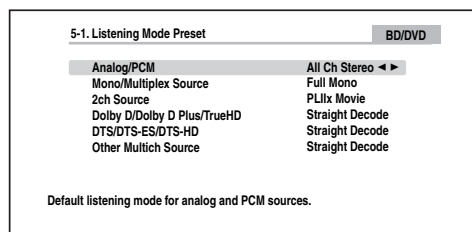

### 2 Use ▲/▼ to select the signal format that you want to set, and then use ◀/▶ to select a listening mode.

Only listening modes that can be used with each input signal format can be selected (→ **pages 40 to 44**).

The **"Last Valid"** option means that the listening mode selected last will be used.

The **"Straight Decode"** option means that straight decoding listening mode (Dolby Digital, DTS, etc.) is selected.

#### Note

- For the **"TUNER"** input selector, only **"Analog"** will be available.
- For the **"NET"** or **"USB"** input selector, **"Digital"** and **"TrueHD"** will be available.

- For the **"BLUETOOTH"** input selector, only **"Digital"** is available.

### ■ Analog/PCM/Digital

With this setting, you can specify the listening mode used when an analog (CD, TV, LD, VHS, MD, turntable, radio, cassette, cable, satellite, etc.) or PCM digital (CD, DVD, etc.) audio signal is played.

### ■ Mono/Multiplex Source

With this setting, you can specify the listening mode used when a mono digital audio signal is played (DVD, etc.).

### ■ 2ch Source

With this setting, you can specify the listening mode used when 2-channel (2/0) stereo digital sources, such as Dolby Digital or DTS, are played.

### ■ Dolby D/Dolby D Plus/TrueHD

With this setting, you can specify the listening mode used when Dolby Digital or Dolby Digital Plus format digital audio signals are played (DVD, etc.). Specifies the default listening mode for Dolby TrueHD sources, such as Blu-ray or HD DVD (input via HDMI).

### ■ DTS/DTS-ES/DTS-HD

With this setting, you can specify the listening mode used when DTS or DTS-HD High Resolution format digital audio signals are played (DVD, LD, CD, etc.). Specifies the default listening mode for DTS-HD Master Audio sources, such as Blu-ray or HD DVD (input via HDMI).

### ■ Other Multich Source

Specifies the default listening mode for multichannel PCM sources from **HDMI IN** such as DVD-Audio, and DSD multichannel sources such as Super Audio CD.

## 6. Miscellaneous

### Volume Setup

#### ■ Maximum Volume

##### ► Off, 30 to 79

With this setting, you can limit the maximum volume. To disable this setting, select **"Off"**.

#### ■ Power On Volume

##### ► Last, Min, 1 to 79 or Max

With this preference, you can specify the volume setting to be used each time the AV receiver is turned on.

To use the same volume level that was used when the AV receiver was turned off, select **"Last"**.

The **"Power On Volume"** setting cannot be set higher than the **"Maximum Volume"** setting.

#### ■ Headphone Level

##### ► -12dB to 0dB to +12dB

With this setting, you can specify the headphone volume relative to the main volume. This is useful if there's a volume difference between your speakers and your headphones.

### OSD Setup

#### ■ On Screen Display

##### ► On

##### ► Off

This preference determines whether operation details are displayed on-screen when an AV receiver function is adjusted.

Even when **"On"** is selected, operation details may not be output if the input source is connected to an **HDMI IN**.

#### ■ Language

##### (North American models)

##### ► English, Deutsch, Français, Español, Italiano, Nederlands, Svenska, 中文

##### (Australian models)

##### ► English, Deutsch, Français, Español, Italiano, Nederlands, Svenska, Русский язык, 中文

This setting determines the language used for the on-screen menus.

#### ■ Screen Saver

##### ► 3min, 5min, 10min

##### ► Off

With this setting, you can set the time until the screen saver activates itself. Once active, the screen saver will go off and the screen will return to its previous state if the AV receiver is operated in any way.

### 12V Trigger A/B/C Setup

Depending on their type, when some components are turned by using triggers A, B, and C, a large amount of current may be drawn at once. To prevent this, you can delay each trigger signal individually. Another application of trigger delay is to eliminate the "thump" noise that's sometimes heard when a source component is turned on.

You can accomplish this by delaying the trigger signal for your power amplifier, so that it's the last component to be turned on.

#### ■ Delay

##### ► 0sec, 1sec, 2sec, 3sec:

When **"0sec"** is selected, the trigger signal is output as soon as the input source is changed.

#### Note

- By default, **"12V Trigger A Setup"** is set to **"0sec"**, **"12V Trigger B Setup"** to **"1sec"**, and **"12V Trigger C Setup"** to **"2sec"**.
- Use a miniplug cable to connect the AV receiver's **12V TRIGGER OUT A, B, or C** jack to the 12 V trigger input of a connected component.

#### ■ BD/DVD, CBL/SAT, GAME, PC, AUX, TUNER, TV/CD, PHONO, NET, USB

##### ► Off:

No trigger signal is output.

A 12-volt trigger signal is output when the connected component is selected as the source for:

##### ► Main, Zone 2, Main/Zone 2

#### Note

- By default, all input sources on the **"12V Trigger A Setup"** menu are set to **"Main"**, those on **"12V Trigger B Setup"** are set to **"Main/Zone 2"**, and those on **"12V Trigger C Setup"** are set to **"Zone 2"**.

#### ■ BLUETOOTH

##### ► Off:

No trigger signal is output.

A 12-volt trigger signal is output when the connected component is selected as the source for:

##### ► Main

#### Note

- By default, **"BLUETOOTH"** input source on the **"12V Trigger A Setup"** menu and that on **"12V Trigger B Setup"** menu are set to **"Main"**, and that on **"12V Trigger C Setup"** is set to **"Off"**.

## 7. Hardware Setup

### Multi Zone

#### ■ Zone 2 Out

##### ▶ Fixed:

The Zone 2 volume must be set on the amp in that zone.

##### ▶ Variable:

The Zone 2 volume can be set on the AV receiver.

If you've connected your Zone 2 speakers to an amp with no volume control, set the "**Zone 2 Out**" setting, to "**Variable**" so that you can set the volume, balance, and tone of zone 2 on the AV receiver.

#### ■ Zone 2 Maximum Volume

##### ▶ Off, 30 to 79

With this setting, you can limit the maximum volume for Zone 2.

#### ■ Zone 2 Power On Volume

##### ▶ Last, Min, 1 to 79 or Max

This setting determines what the volume will be for Zone 2 each time the AV receiver is turned on.

To use the same volume level as when the AV receiver was last turned off, select "**Last**".

The "**Zone 2 Power On Volume**" cannot be set higher than the "**Zone 2 Maximum Volume**" setting.

### Tuner

#### ■ AM/FM Frequency Step (North American models)

##### ▶ 10kHz/200kHz:

##### ▶ 9kHz/50kHz:

Select the frequency step according to your area.

#### ■ AM Frequency Step (Australian models)

##### ▶ 10kHz:

##### ▶ 9kHz:

Select the frequency step according to your area.

For AM/FM tuning to work properly, you must specify the AM/FM frequency step used in your area.

#### Note

- When this setting is changed, all radio presets will be deleted.

### HDMI

#### ■ HDMI CEC (RIHD)

##### ▶ Off

##### ▶ On

Turn this setting on to allow **RIHD**-compatible components connected via HDMI to be controlled by the AV receiver (→ **page 15**).

#### Note

- When the setting is set to "**On**" and the menu is closed, the names of connected **RIHD**-compatible components and "**RIHD On**" are displayed on the AV receiver. "**Search...**" → "**(name)**" → "**RIHD On**"  
When the AV receiver cannot receive the name of the component, it is displayed as "**Player\***" or "**Recorder\***", etc. ("**\***" shows up and indicates the number of components, when two or more are received).
- When an **RIHD**-compatible component is connected to the AV receiver via an HDMI cable, the name of the connected component is displayed on the AV receiver display. For example, while you are watching TV broadcasting, if you operate a Blu-ray Disc/DVD player (being powered on) with the remote control of the AV receiver, the name of the Blu-ray Disc/DVD player will be displayed on the AV receiver.
- Set it to "**Off**" when a connected piece of equipment is not compatible or it is unclear whether the equipment is compatible or not.
- If operation is not normal when set to "**On**", change the setting to "**Off**".
- Refer to the connected component's instruction manual for details.
- When the "**HDMI CEC (RIHD)**" setting is set to "**On**", the power consumption on standby mode slightly increases. (Depending on the TV status, the AV receiver will enter standby mode as usual.)
- The **RIHD** control does not support **HDMI OUT SUB**. Use **HDMI OUT MAIN** instead.
- When the source equipment is connected with the **RI** connection, it may malfunction if "**HDMI CEC (RIHD)**" is set to "**On**".

## ■ HDMI Through

### ► Off

### ► BD/DVD, CBL/SAT, GAME, PC, AUX, TV/CD, PHONO:

Selects the input source for which the HDMI Through function is enabled.

### ► Last:

The HDMI Through function is activated on the input source selected at the time of setting the AV receiver to standby mode.

When enabling the HDMI Through function, regardless of whether the AV receiver is on or in standby, both audio and video streams from an HDMI input will be output to the TV or other components via HDMI connection. The **HDMI** indicator will be dimly-lit in standby mode. Note that the indicator may not light under certain conditions (→ [page 21](#)).

This setting is fixed to “**Auto**” automatically when the above “**HDMI CEC (RIHD)**” setting is set to “**On**”, resulting in automatic input source selection.

### Note

- Only an input source assigned to an **HDMI IN** via “**HDMI Input**” setting is enabled (→ [page 52](#)).
- The power consumption in standby mode will increase during the HDMI Through function; however in the following cases, the power consumption can be saved:
  - The TV is in standby mode.
  - You are watching a TV program.
- Refer to the connected component’s instruction manual for details.
- Depending on the connected component, the correct input source may not be selected with the setting fixed to “**Auto**”.
- This setting is set to “**Off**” automatically when the “**HDMI CEC (RIHD)**” setting is set to “**Off**”.
- This function is only available for the **HDMI OUT MAIN** jack.

## ■ Audio TV Out (Main)

### ► Off

### ► On

This preference determines whether the incoming audio signal is output from **HDMI OUT MAIN**. You may want to turn this preference on if your TV is connected to **HDMI OUT MAIN** and you want to listen to the audio from a connected component through your TV’s speakers. Normally, this should be set to “**Off**”.

### Note

- If “**On**” is selected and the audio can be output from the TV, the AV receiver will output no sound through its speakers. In this case, “**TV Speaker**” appears on the AV receiver’s display by pressing **Display**.
- When “**HDMI CEC (RIHD)**” is set to “**On**”, this setting is fixed to “**Auto**”.
- This setting is fixed to “**Off**” when “**Monitor Out**” is set to “**Sub**” (→ [page 51](#)).
- With some TVs and input signals, no sound may be output even when this setting is set to “**On**”.
- When “**Audio TV Out (Main)**” or “**HDMI CEC (RIHD)**” is set to “**On**” and you’re listening through your TV’s speakers, turning up the AV receiver’s volume control will make the sound be output from the AV receiver’s front left and right speakers. To stop the AV receiver’s speakers producing sound, change the settings, change your TV’s settings, or turn down the AV receiver’s volume.
- Listening mode cannot be changed when this setting is set to “**On**” and the audio is output from the TV.
- If the audio signal from the player is not supported by the TV, the audio is not output from the TV even if this setting is enabled. When the audio cannot be output from the TV, (When “**Monitor Out**” is set to “**Both**”, the audio cannot be output from the TV connected to both **HDMI OUT MAIN** and **HDMI OUT SUB**) the audio is output from the speakers connected to the AV receiver.

## ■ Audio TV Out (Sub)

### ► Off

### ► On

This preference determines whether the incoming audio signal is output from **HDMI OUT SUB**. You may want to turn this preference on if your TV is connected to **HDMI OUT SUB** and you want to listen to the audio from a connected component through your TV’s speakers. Normally, this should be set to “**Off**”.

### Note

- If “**On**” is selected and the audio can be output from the TV, the AV receiver will output no sound through its speakers. In this case, “**TV Speaker**” appears on the AV receiver’s display by pressing **Display**.
- This setting is fixed to “**Off**” when “**Monitor Out**” is set to “**Main**” (→ [page 51](#)).
- When “**Monitor Out**” is set to “**Both**” (→ [page 51](#)), and this setting is enabled, set audio output of source component to 2ch PCM.
- With some TVs and input signals, no sound may be output even when this setting is set to “**On**”.
- When “**Audio TV Out (Sub)**” is set to “**On**” and you’re listening through your TV’s speakers, turning up the AV receiver’s volume control will make the sound be output from the AV receiver’s front left and right speakers. To stop the AV receiver’s speakers producing sound, change the settings, change your TV’s settings, or turn down the AV receiver’s volume.
- Listening mode cannot be changed when this setting is set to “**On**” and the audio is output from the TV.
- When “**Monitor Out**” is set to “**Both**” (→ [page 51](#)) and only “**Audio TV Out (Sub)**” is set to “**On**”, the audio is not output from the TV connected to **HDMI OUT SUB** except in the case the audio input is via HDMI.
- If the audio signal from the player is not supported by the TV, the audio is not output from the TV even if this setting is enabled. When the audio cannot be output from the TV, (When “**Monitor Out**” is set to “**Both**”, the audio cannot be output from the TV connected to both **HDMI OUT MAIN** and **HDMI OUT SUB**) the audio is output from the speakers connected to the AV receiver.



## ■ Audio Return Channel

### ▶ Off

### ▶ Auto:

The audio signal from your TV tuner can be sent to **HDMI OUT MAIN** of the AV receiver.

The audio return channel (ARC) function allows an ARC capable TV to send the audio stream to **HDMI OUT MAIN** of the AV receiver. To use this function, you must select the **TV/CD** input selector and your TV must be ARC capable. The **ARC** indicator will light when the audio signal is detected. Default setting: “- - - -”

### Note

- This setting is fixed to “- - - -” when the “**HDMI CEC (RIHD)**” setting is set to “**Off**”.
- This setting is set to “**Auto**” automatically when the “**HDMI CEC (RIHD)**” setting is set to “**On**” for the first time.
- If you set “**Audio Return Channel**” to “**Auto**”, the “**Audio Selector**” settings of the **TV/CD** input selector will be automatically switched to “**ARC**” (→ page 60).

### Tip

- After changing the settings of the “**HDMI CEC (RIHD)**”, “**HDMI Through**” or “**Audio Return Channel**”, turn off the power on all connected pieces of equipment and then turn them on again. Refer to the user’s manuals for all connected pieces of equipment.

## ■ Lip Sync

### ▶ Off

### ▶ On

This function allows the AV receiver to automatically correct any delay between the video and the audio, based on the data from the connected monitor.

### Note

- This function works only if your HDMI-compatible TV supports HDMI Lip Sync.

## ■ InstaPrevue

These settings apply to “**InstaPrevue**” of the Home menu (→ page 46) and specify the preview display of HDMI video streams.

### Sub Window

#### ▶ Multi:

Displays preview thumbnails all at once.

#### ▶ Single:

Displays preview thumbnails one-by-one.

With this setting, you can set the number of preview thumbnails displayed.

### Position

(with “**Sub Window**” set to “**Multi**”)

#### ▶ Top, Bottom, Left, Right

(with “**Sub Window**” set to “**Single**”)

#### ▶ Upper Left, Upper Right, Lower Left, Lower Right

With this setting, you can set the position of preview thumbnails on the TV screen.

### Note

- Depending on video signals, the picture may not be properly rendered on the preview thumbnails of InstaPrevue.

## Auto Standby

### ■ Auto Standby

#### ▶ Off

#### ▶ On

When “**Auto Standby**” is set to “**On**”, the **ASb** indicator lights and the AV receiver will automatically enter standby mode if there is no operation for 30 minutes with no audio and no video signal input.

“**Auto Standby**” will appear on the AV receiver’s display and OSD 30 seconds before the Auto Standby comes on.

Default setting: **On (Australian models)**, **Off (North American models)**

### Note

- Set to “**On**”, the Auto Standby function may activate itself during playback with some sources.
- The Auto Standby function does not work when Zone 2 is on.

## ■ HDMI Through

### ▶ Off

### ▶ On

This setting enables or disables the Auto Standby during HDMI Through by detecting the audio/video input signal.

When this setting is set to “**On**”, the AV receiver will automatically enter standby mode if there is no audio and no video signal input during HDMI Through for 30 minutes. (The Auto Standby function does not work when Zone 2 is on.)

When this setting is set to “**Off**”, the status of HDMI Through is continued regardless of audio/video input signal.

### Tip

- Entering standby mode is possible by setting “**HDMI CEC (RIHD)**” to “**On**” and using CEC-compatible component regardless of the above-mentioned setting. See “**HDMI CEC (RIHD)**” in “7. Hardware Setup” for linked operation (→ page 63).
- When the HDMI Through is enabled, the power consumption slightly increases.

### Note

- This setting is fixed to “**Off**” when “**Auto Standby**” is set to “**Off**”.

## Network

This section explains how to configure the AV receiver's network settings manually.

After modifying the network settings, you must confirm the changes by executing **"Save"**.

If your router's DHCP server is enabled, you don't need to change any of these settings, as the AV receiver is set to use DHCP to configure itself automatically by default (i.e., DHCP is set to **"Enable"**). If, however, your router's DHCP server is disabled (you're for example using static IP), you'll need to configure these settings yourself, in which case, a knowledge of Ethernet networking is essential.

### What's DHCP?

DHCP (Dynamic Host Configuration Protocol) is used by routers, computers, the AV receiver, and other devices to automatically configure themselves on a network.

### What's DNS?

The DNS (Domain Name System) translates domain names into IP addresses. For example, when you enter a domain name such as *www.onkyousa.com* in your Web browser, before accessing the site, your browser uses DNS to translate this into an IP address, in this case 63.148.251.142.

### ■ Network Connection

#### ▶ Wired

#### ▶ Wireless

This setting determines whether you connect the AV receiver to network by wired LAN or wireless LAN. If you connect by wireless LAN, select **"Wireless"**. See "Performing Wireless LAN Setup" for setting (→ [page 26](#)).

#### Tip

- The same setting is available even if **"Wireless"** is selected in **"Network Connection"** in initial setup (→ [page 22](#)).

### ■ MAC Address

This is the AV receiver's MAC (Media Access Control) address. This address cannot be changed.

### ■ DHCP

#### ▶ Enable

#### ▶ Disable

This setting determines whether or not the AV receiver uses DHCP to automatically configure its IP Address, Subnet Mask, Gateway, and DNS Server settings.

#### Note

- If you select **"Disable"**, you must configure the **"IP Address"**, **"Subnet Mask"**, **"Gateway"**, and **"DNS Server"** settings yourself.

### ■ IP Address

#### ▶ Class A:

**"10.0.0.0"** to **"10.255.255.255"**

#### ▶ Class B:

**"172.16.0.0"** to **"172.31.255.255"**

#### ▶ Class C:

**"192.168.0.0"** to **"192.168.255.255"**

Enter a static IP address provided by your Internet Service Provider (ISP).

Most routers use Class C IP addresses.

### ■ Subnet Mask

Enter the subnet mask address provided by your ISP (typically **255.255.255.0**).

### ■ Gateway

Enter the gateway address provided by your ISP.

### ■ DNS Server

Enter the DNS server address provided by your ISP.

### ■ Proxy URL

To use a Web proxy, enter its URL here.

### ■ Proxy Port

If you're using a Web proxy, enter a proxy port number here.

### ■ Network Standby

#### ▶ On

#### ▶ Off

This setting enables or disables control over the network.

When enabled, the **NET** indicator will be dimly-lit while the AV receiver is in standby mode. Note that the indicator may not light under certain conditions (→ [page 21](#)).

#### Note

- When set to **"On"**, the power consumption slightly increases in standby mode.

### ■ Update Notice

#### ▶ Enable

#### ▶ Disable

When this setting is enabled, you will be notified if a firmware update via network of high importance is available.

#### Note

- Selecting **"Never Remind me"** on the notification window will switch this setting to **"Disable"** (→ [page 21](#)).
- For details on the update notification, see "Firmware Update Notification" (→ [page 21](#)).

## ■ Bluetooth

This setting enables the AV receiver to pair with Bluetooth-enabled device.

### Status

Press **Enter** button to display “**Now Pairing**” and start pairing.

### Tip

- If pairing setting is not set, “**Ready**” appears on-screen display. The name of the device paired with the AV receiver is displayed if pairing setting is set.
- For details on the Bluetooth connection, refer to the instruction manual of the Bluetooth-enabled device.

### Note

- This setting cannot be selected if you’ve selected **NET** or **USB** as input selector in Zone 2.

## Initial Setup

If you skipped the initial setup wizard, for example on first-time use, you can reaccess it from here.

See “**Initial Setup**” (→ **page 21**).

### Note

- This setting cannot be selected if the “**Monitor Out**” setting is set to “**Sub**”.

## 8. Remote Controller Setup

### Remote ID

#### ■ Remote ID

▶ **1, 2, or 3**

When several Integra/Onkyo components are used in the same room, their remote ID codes may overlap. To differentiate the AV receiver from other components, you can change its remote ID from “**1**”, to “**2**” or “**3**”.

### Note

- If you do change the AV receiver’s remote ID, be sure to change the remote controller to the same ID (see below), otherwise, you won’t be able to control it with the remote controller.

### Changing the remote controller’s ID

- 1 While holding down Receiver, press and hold down Q Setup until the remote indicator lights (about 3 seconds).**
- 2 Use the number buttons to enter ID 1, 2, or 3.**  
The remote indicator flashes twice.

### Remote Mode Setup

See “Looking up for Remote Control Codes” (→ **page 72**).

## 9. Lock Setup

With this preference, you can protect your settings by locking the setup menus.

### ■ Setup

▶ **Locked**

▶ **Unlocked**

When “**Locked**” is selected, the setup menus will be locked and you cannot change any setting.

# Zone 2


In addition to the main listening room, you can also enjoy playback in another room, or as we call Zone 2. And, you can select a different source for each room.

## Making Zone 2 Connections

### Connecting Your Zone 2 Speakers Directly to the AV receiver

This setup allows you to select different sources for Main room and Zone 2. This is called Powered Zone, as the Zone 2 speakers are powered by the AV receiver.

To use this setup, you must activate the Powered Zone 2 setting (→ [page 54](#)).

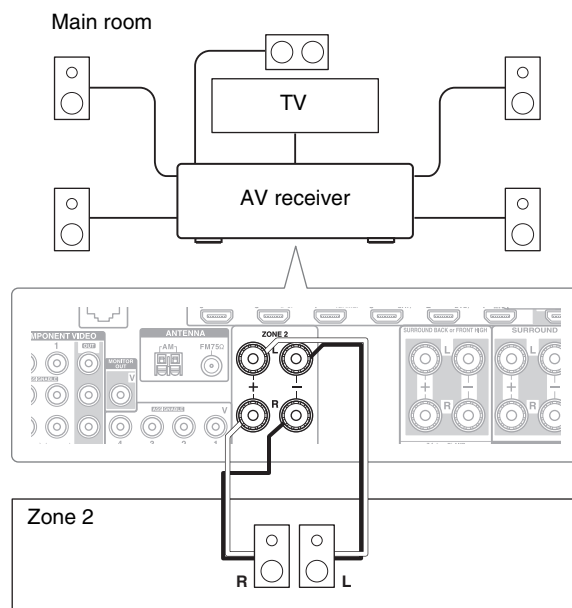


#### Note

- With this setup, the volume of Zone 2 is controlled by the AV receiver.
- When Powered Zone 2 is used, playback in the main room is reduced to 5.1 channels.

### Connecting the Zone Speakers to an Additional Amplifier

This setup allows 7.1-channel playback in your main listening room and 2-channel stereo playback in Zone 2.

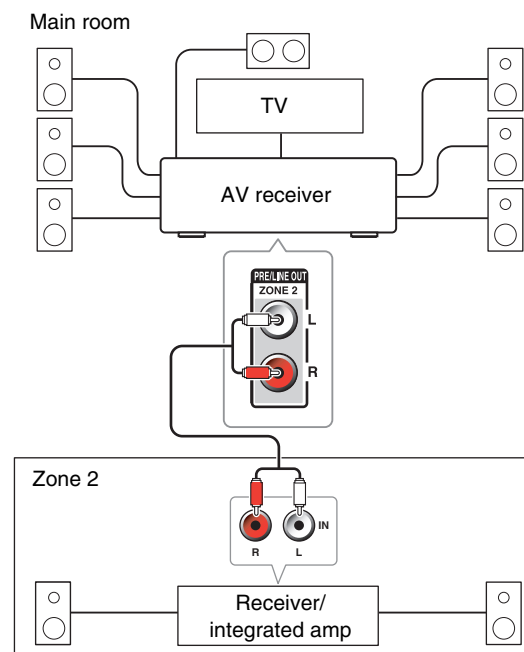

#### Note


- With the default settings, the Zone 2 volume must be set on the Zone 2 amplifier. If your Zone 2 amplifier has no volume control, change the setting so that you can set the Zone 2 volume on the AV receiver. See "Multi Zone" (→ [page 63](#)).

## Setting the Zone 2 Out

See “Multi Zone” (→ page 63).

## Controlling Zone 2 Components

### ■ Operating on the AV receiver

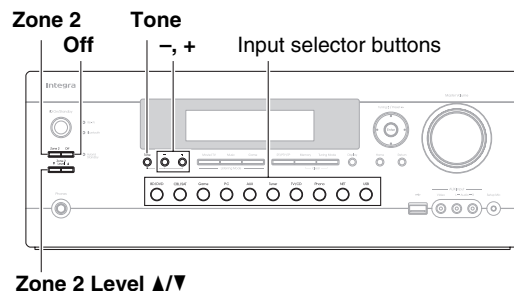

- 1 To turn on Zone 2 and select an input source, press Zone 2 followed by an input selector button within 8 seconds.**

Zone 2 turns on, the **Z2** indicator lights on the AV receiver's display.

#### Tip

- The corresponding trigger output goes high (+12 V).

To select the same source as the main room's, press **Zone 2** twice. “**Z2 Sel: Source**” appears on the AV receiver's display.

- 2 To turn off Zone 2, press Off.**


The zone is turned off.

#### Tip

- The corresponding trigger output goes low (0 volts).

### ■ Operating on the remote controller

To control Zone 2, you must press **Zone2** on the remote controller first.

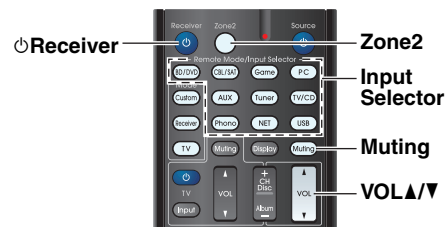

- 1 Press Zone2, then point the remote controller at the AV receiver and press ⏻Receiver.**

Zone 2 turns on, the **Z2** indicator lights on the AV receiver's display.

#### Tip

- The corresponding trigger output goes high (+12 V).

- 2 To select an input source for Zone 2, press Zone2, followed by an Input Selector button.**

- 3 To turn off Zone 2, press Zone2, followed by ⏻Receiver.**

The zone is turned off.

#### Tip

- The corresponding trigger output goes low (0 volts).

## Adjusting the Volume for Zone 2

### ■ Operating on the remote controller

- 1 Press Zone2.**

- 2 Use VOL ▲/▼.**

### ■ Operating on the AV receiver

- 1 Use Zone 2 Level ▲/▼.**

If your Zone 2 speakers are connected to a receiver or integrated amplifier in Zone 2, use its volume control to adjust the volume.

## Muting Zone 2

### ■ Operating on the remote controller

- 1 Press Zone2 followed by Muting.**

#### Tip

- To unmute, press **Zone2** followed by **Muting** again. Zone can also be unmuted by adjusting the volume.

## Adjusting the Tone and Balance of Zone 2

- 1 On the AV receiver, press Zone 2.**
- 2 Press the AV receiver's Tone repeatedly to select “Bass”, “Treble” or “Balance”.**
- 3 Use – or + to adjust the bass, treble or balance.**
  - You can boost or cut the bass or treble from –10 dB to +10 dB in 2 dB steps.
  - You can adjust the balance from 0 in the center to +10 dB to the right or +10 dB to the left in 2 dB steps.


**Note**

- Only analog, **NET** or **USB** input source is output from the **ZONE 2 PRE/LINE OUT** jacks and **ZONE 2 L/R** terminals.
- You cannot select different AM or FM radio stations for your main room and Zone 2. The same AM/FM radio station will be heard in each room. Namely, if you have selected an FM station for the main room, that station will also be output in Zone 2.
- You cannot select different input selector **NET** or **USB** for your main room and Zone 2. Namely, if you have selected **USB** input selector for Zone 2, **USB** input selector will be selected in main room even if **NET** has been selected for main room.
- “**BLUETOOTH**” cannot be selected as input selector in Zone 2. If you play audio from Bluetooth-enabled device in Zone 2, select “**Z2 Sel: Source**”, and “**BLUETOOTH**” as input selector in Main room.
- When Zone 2 is activated and its input selector is selected, the power consumption of standby mode slightly increases.
- While Zone 2 is on, **RI** functions will not work.
- When setting the AV receiver to standby mode while Zone 2 is active, the **Z2** indicator is dimly lit.
- The Zone 2 level, balance, and tone functions have no effect on the **ZONE 2 PRE/LINE OUT** jacks when the “**Zone 2 Out**” setting is set to “**Fixed**” (→ page 63).

**Using the 12V Triggers**

The 12V triggers A, B, and C can be used to turn on 12V trigger-capable components automatically when they are selected as the input source. The triggers can be set so that they activate themselves once a connected component is selected as the input source for the main room, Zone 2 or any combination of rooms. When triggered, the output from a **12V TRIGGER OUT** goes high (+12 volts and 150 milliamperes max. at **12V TRIGGER OUT A**; +12 volts and 25 milliamperes max. at **12V TRIGGER OUT B** and **C**).

See “12V Trigger A/B/C Setup” (→ page 62).

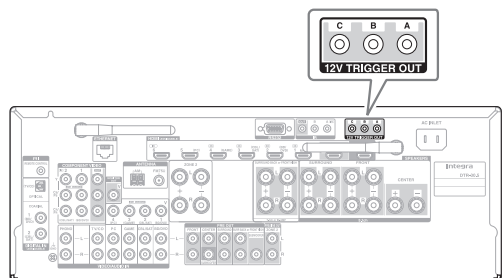**Hookup**


- Use a miniplug cable to connect the AV receiver's **12V TRIGGER OUT A, B, or C** jack to the 12 V trigger input of a connected component.

## Using the Remote Controller in Zone 2 and Multiroom Control Kits


To control the AV receiver with the remote controller while you're in the Zone 2 room, you'll need a commercially available multiroom remote control kit. Multiroom kits are made by Niles and Xantech. These kits can also be used when there isn't a clear line of sight to the AV receiver's remote sensor, such as when it's installed inside a cabinet.

### Using a Multiroom Kit with Zone 2

In this setup, the IR receiver in Zone 2 picks up the infrared signals from the remote controller and feeds them through to the AV receiver in the main room via the connecting block.

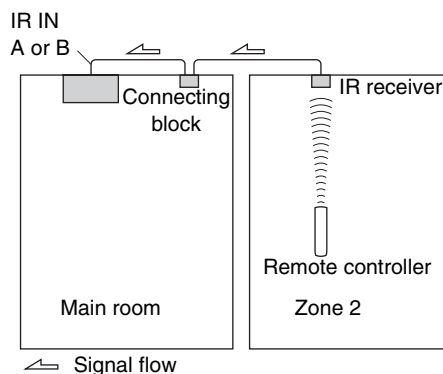


The miniplug cable from the connecting block should be connected to the AV receiver's **IR IN A** or **B** jack, as shown below. The **IR IN A** and **B** jacks are identical. Up to two IR receivers can be connected.

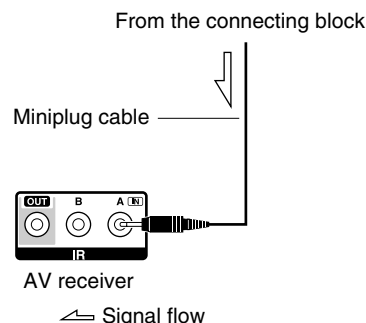


### Using a Multiroom Kit with a Cabinet

In this setup, the IR receiver picks up the infrared signals from the remote controller and feeds them to the AV receiver located in the cabinet via the connecting block.

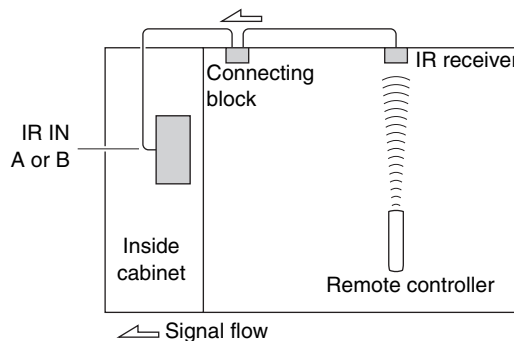


## Using a Multiroom Kit with Other Components

In this setup, an IR emitter is connected to the AV receiver's **IR OUT** jack and placed in front of the other component's remote control sensor. Infrared signals received at the AV receiver's **IR IN A** or **B** jack are fed through to the other component via the IR emitter. Signals picked up by the AV receiver's remote control sensor are not output.

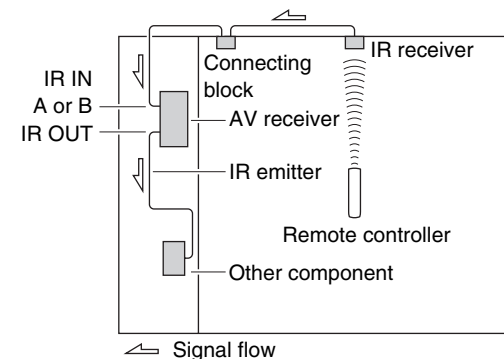

The IR emitter should be connected to the AV receiver's **IR OUT** jack, as shown below.

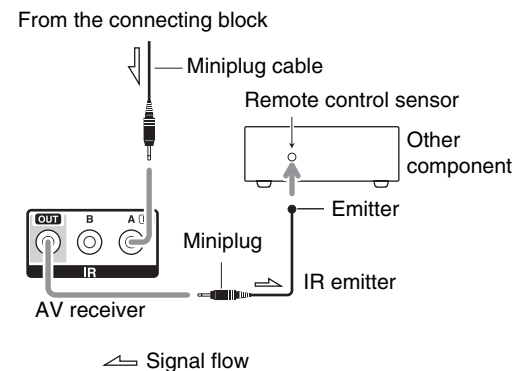

# Controlling Other Components

You can use the AV receiver's remote controller to control your other AV components, including those made by other manufacturers. This section explains how to enter the remote control code for a component that you want to control: DVD, TV, CD, etc.

## Preprogrammed Remote Control Codes

The following **Remote Mode** buttons are preprogrammed with remote control codes for controlling the components listed. You do not need to enter a remote control code to control these components.

For details on controlling these components, see the indicated pages.

<b>BD/DVD</b>	Integra/Onkyo Blu-ray Disc player (→ page 74)
<b>TV/CD</b>	Integra/Onkyo CD player (→ page 73)
<b>PC</b>	Apple TV

## Looking up for Remote Control Codes

You can look up for an appropriate remote control code from the on-screen menu.

### Note

- You need to connect your TV to the HDMI output (**HDMI OUT MAIN**) to make the following on-screen setting.

- 1 Press **Receiver** followed by **Home**.
- 2 Use **◀/▶** or **▲/▼** to select "**Setup**", and then press **Enter**.

- 3 Use **▲/▼** to select "**Remote Controller Setup**", and then press **Enter**.
- 4 Use **▲/▼** to select "**Remote Mode Setup**", and then press **Enter**.
- 5 Use **▲/▼** to select a remote mode, and then press **Enter**.  
The menu of category selection appears.
- 6 Use **▲/▼** to select a category, and then press **Enter**.  
The keyboard screen for brand name input appears.
- 7 Use **▲/▼/◀/▶** to select a character, and then press **Enter**.  
Repeat this step for the first three characters of the brand name.  
When you have entered the 3rd character, select "**Search**" and press **Enter**.  
A list of brand names is retrieved.  
**If the desired brand name is not found:**  
Use **▶** to select "**Not Listed**", and then press **Enter**.  
The keyboard screen for brand name input appears.
- 8 Use **▲/▼** to select a brand, and then press **Enter**.  
A remote control code with its instructions are displayed. Follow the procedure.
- 9 If you can control the component, use **▲/▼** to select "**OK**", and then press **Enter**.  
The on-screen menu returns to the "**Remote Mode Setup**" front screen.  
  
**If you cannot control the component, use **▲/▼** to select "**Try Next Code**" and press **Enter**.**  
The next code is displayed.

## Entering Remote Control Codes

You'll need to enter a code for each component that you want to control.

- 1 Look up the appropriate remote control code in the separate **Remote Control Codes** list.  
The codes are organized by category (e.g., DVD player, TV, etc.).
- 2 While holding down the **Remote Mode** button to which you want to assign a code, press and hold down **Display** (about 3 seconds).  
The remote indicator lights.

### Note

- Remote control codes cannot be entered for **Receiver** and the multi zone button.
- Only TV remote control codes can be entered for **TV**.
- Except for **Receiver**, **TV**, and the multi zone button, remote control codes from any category can be assigned for the **Remote Mode** buttons. However, these buttons also work as input selector buttons, so choose a **Remote Mode** button that corresponds with the input to which you connect your component. For example, if you connect your CD player to the CD input, choose **TV/CD** when entering its remote control code.

- 3 Within 30 seconds, use the number buttons to enter the 5-digit remote control code.  
The remote indicator flashes twice.  
If the remote control code is not entered successfully, the remote indicator will flash once slowly.

### Note

- Though the provided remote control codes are correct at the time of release, they are subject to change.



## Remapping Colored Buttons

You can change the configuration of colored buttons, with which **Remote Mode** buttons are preset.

- 1 **While holding down the Remote Mode button that you want to program, press and hold down A (Red) until the remote indicator lights (about 3 seconds).**

You can only change colored buttons for components whose codes belong to categories of the Remote Control Codes list (BD/DVD player, TV, cable set-top box, etc).

- 2 **Within 30 seconds, press the colored buttons in the order that you want to reassign them.**

The button presses are assigned to each button from left to right. The remote indicator flashes twice, indicating that the sequence has been successfully assigned. If the sequence is not successfully assigned, the remote indicator will flash once slowly.

### Tip

- To reset the **Remote Mode** buttons to their default settings, see "Resetting the Remote Mode Buttons".

### Note

- If any other button than the colored buttons is pressed, the operation will be cancelled.
- This operation cannot be done while the AV receiver is in Receiver mode or when Zone 2 is active.

## Remote Control Codes for Integra/Onkyo Components Connected via RI

Integra/Onkyo components that are connected via **RI** are controlled by pointing the remote controller at the AV receiver, not the component. This allows you to control components that are out of view, in a rack, for example.

- 1 **Make sure the Integra/Onkyo component is connected with an RI cable and an analog audio cable (RCA).**

See "Connecting Integra/Onkyo RI Components" for details (→ page 19).

- 2 **Enter the appropriate remote control code for a Remote Mode button, by referring to the previous section.**

▶ **42157:**

Onkyo cassette tape deck with **RI**

▶ **81993:**

Onkyo Dock with **RI**

- 3 **Press the Remote Mode button, point the remote controller at the AV receiver, and operate the component.**

## Controlling Integra/Onkyo components without RI

If you want to control an Integra/Onkyo component by pointing the remote controller directly at it, or you want to control an Integra/Onkyo component that's not connected via **RI**, use the following remote control codes:

▶ **30627:**

Integra/Onkyo DVD player without **RI**

▶ **71817:**

Integra/Onkyo CD player without **RI**

▶ **32900/33100/33500:**

Integra/Onkyo Blu-ray Disc player

▶ **32901/33104/33504:**

Integra/Onkyo HD DVD player

▶ **70868:**

Onkyo MD recorder without **RI**

▶ **71323:**

Onkyo CD recorder without **RI**

▶ **82990:**

Onkyo Dock without **RI**

## Resetting the Remote Mode Buttons

You can reset a **Remote Mode** button to its default remote control code.

- 1 **While holding down the Remote Mode button that you want to reset, press and hold down Home until the remote indicator lights (about 3 seconds).**

- 2 **Within 30 seconds, press the Remote Mode button again.**

The remote indicator flashes twice, indicating that the button has been reset.

Each **Remote Mode** button is preprogrammed with a remote control code. When a button is reset, its preprogrammed code is restored.

## Resetting the Remote Controller

You can reset the remote controller to its default settings.

- 1 **While holding down Receiver, press and hold down Home until the remote indicator lights (about 3 seconds).**

- 2 **Within 30 seconds, press Receiver again.**

The remote indicator flashes twice, indicating that the remote controller has been reset.

## Controlling Other Components

By pressing the **Remote Mode** button that's been programmed with the remote control code for your component, you can control your component as described below.

For details on entering a remote control code for other components, see "Entering Remote Control Codes" (→ [page 72](#)).

### Controlling a TV

**TV** is preprogrammed with the remote control code for controlling a TV that supports the **RIHD**\*1 (limited to some models). The TV must be able to receive remote control commands via **RIHD** and be connected to the AV receiver via HDMI. If controlling your TV via **RIHD** doesn't work very well, program your TV's remote control code into **TV** and use the TV remote mode to control your TV.

Use the following remote control codes:

▶ **11807/13100/13500:**

TV with **RIHD**

### Controlling Apple TV

By programming the supplied remote controller with the appropriate remote control code, you can use it to operate your Apple TV.

Use the following remote control codes:

▶ **02615:**

Apple TV

### Controlling MHL-Enabled Mobile Device

By programming the supplied remote controller with the appropriate remote control code, you can use it to operate your MHL-enabled mobile device.

Connect your MHL-enabled mobile device to the **HDMI IN 1** jack. We advise you to program the remote control code on the **AUX** button.

Use the following remote control codes:

**(North American models)**

▶ **33101:**

MHL-enabled mobile device

**(Australian models)**

▶ **32910:**

MHL-enabled mobile device

#### Note

- With some mobile devices, reliable operation cannot be guaranteed.

### Controlling a Blu-ray Disc/DVD Player, HD DVD Player or DVD Recorder


**BD/DVD** is preprogrammed with the remote control code for controlling a component that supports the **RIHD**\*1 (limited to some models). The component must be able to receive remote control commands via **RIHD** and be connected to the AV receiver via HDMI.

Use the following remote control codes:

▶ **32910/33101/33501/31612:**

Blu-ray Disc/DVD player with **RIHD**

\*1 The **RIHD** supported by the AV receiver is the CEC system control function of the HDMI standard.

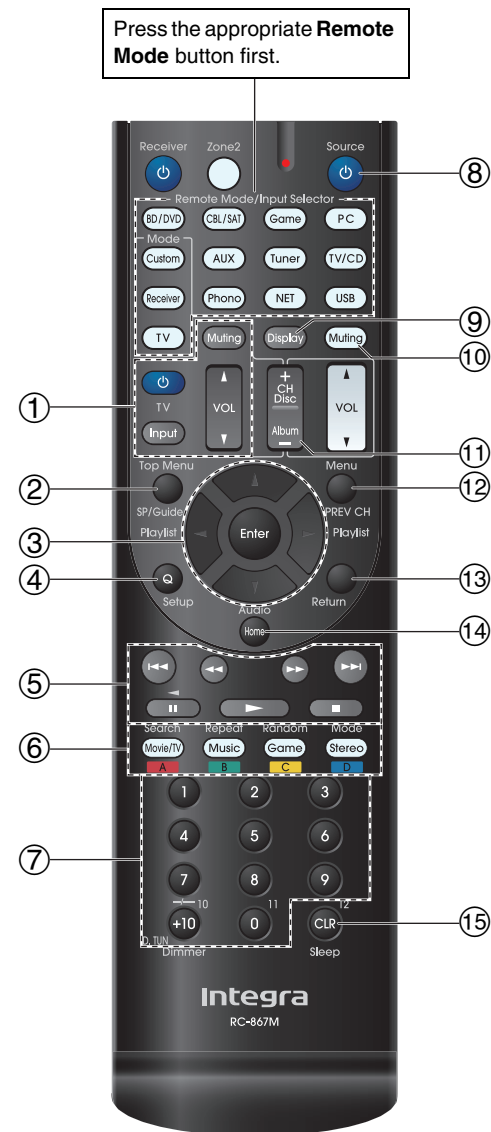

## ■ TV operation

Available buttons		
①	⏻, Input, TV VOL ▲/▼, Muting	⑦ Number: 1 to 9, 0 Number: +10*1
②	Guide	⑨ Display
③	▲/▼/◀/▶, Enter	⑪ CH +/-
④	Setup	⑫ PREV CH
⑤	▶, II, ■, ◀◀, ▶▶,  ◀◀, ▶▶	⑬ Return
⑥	A (Red)*1 B (Green)*1 C (Yellow)*1 D (Blue)*1	⑭ Audio*1 ⑮ CLR

## ■ Blu-ray Disc player/HD DVD player operation

Available buttons		
②	Top Menu	⑧ ⏻Source
③	▲/▼/◀/▶, Enter	⑨ Display
④	Setup	⑩ Muting
⑤	▶, II, ■, ◀◀, ▶▶,  ◀◀, ▶▶	⑪ CH +/- Disc +/-
⑥	A (Red) B (Green) C (Yellow) D (Blue)	⑫ Menu ⑬ Return ⑭ Audio*1 ⑮ CLR
⑦	Number: 1 to 9, 0 Number: +10*1	

## ■ DVD player/DVD recorder operation

Available buttons		
②	Top Menu	⑧ ⏻Source
③	▲/▼/◀/▶, Enter	⑨ Display
④	Setup	⑩ Muting
⑤	▶, II, ■, ◀◀, ▶▶,  ◀◀, ▶▶	⑪ CH +/- Disc +/-
⑥	A (Red)*1 B (Green) C (Yellow)*1 D (Blue)*1	⑫ Menu ⑬ Return ⑭ Audio*1 ⑮ CLR
⑦	Number: 1 to 9, 0 Number: +10*1	

## ■ VCR/PVR operation

Available buttons		
②	Guide	⑧ ⏻Source
③	▲/▼/◀/▶, Enter	⑨ Display
④	Setup	⑩ Muting
⑤	▶, II, ■, ◀◀, ▶▶,  ◀◀, ▶▶	⑪ CH +/- ⑫ PREV CH
⑦	Number: 1 to 9, 0 Number: +10	⑬ Return ⑮ CLR

## ■ Cassette tape deck operation

Available buttons		
⑤	▶, ◀ (Reverse Playback), ■, ◀◀, ▶▶,  ◀◀, ▶▶	⑧ ⏻Source ⑩ Muting

## ■ Satellite receiver/Cable receiver operation

Available buttons		
②	Guide	⑧ ⏻Source
③	▲/▼/◀/▶, Enter	⑨ Display
④	Setup	⑩ Muting
⑤	▶, II, ■, ◀◀, ▶▶,  ◀◀, ▶▶	⑪ CH +/- ⑫ PREV CH
⑥	A (Red) B (Green) C (Yellow) D (Blue)	⑬ Return ⑭ Audio ⑮ CLR
⑦	Number: 1 to 9, 0 Number: +10	

## ■ CD player/CD recorder/MD recorder operation

Available buttons		
③	▲/▼/◀/▶, Enter	⑦ Number: 1 to 9, 0 Number: +10
④	Setup	
⑤	▶, II, ■, ◀◀, ▶▶,  ◀◀, ▶▶	⑧ ⏻Source ⑨ Display
⑥	Search Repeat Random Mode	⑩ Muting ⑪ Disc +/- ⑮ CLR

## Note

- With some components, certain buttons may not work as expected, and some may not work at all.
- See "Controlling Your iPod/iPhone" about the operation of iPod/iPhone (→ page 77).

\*1 The **RIHD** function is not supported. The **RIHD** supported by the AV receiver is the CEC system control function of the HDMI standard.

## Using the Onkyo Dock

### RI Dock

With the RI Dock, you can easily play the music of your iPod/iPhone, or watch the slideshows and videos of your iPod/iPhone on a TV. In addition, the on-screen display (OSD) allows you to view, navigate, and select your iPod/iPhone model's contents on your TV, and with the supplied remote controller, you can control your iPod/iPhone from the comfort of your sofa. You can even use the AV receiver's remote controller to operate your iPod/iPhone.

#### Note

- Enter the appropriate remote control code before using the AV receiver's remote controller for the first time (→ [page 73](#)).
- Connect the RI Dock to the AV receiver with an **RI** cable (→ [page 19](#)).
- Set the RI Dock's RI MODE switch to "HDD" or "HDD/DOCK".
- Set the AV receiver's Input Display to "**DOCK**" (→ [page 45](#)).

### ■ System Function

#### System On

When you turn on the AV receiver, the RI Dock and iPod/iPhone turn on automatically. In addition, when RI Dock and iPod/iPhone are on, the AV receiver can be turned on by pressing **Source**.

#### Auto Power On

If you press the remote controller's **▶** (Playback) while the AV receiver is on standby, the AV receiver will automatically turn on, select your iPod/iPhone as the input source, and your iPod/iPhone will start playback.

### Direct Change

If you start iPod/iPhone playback while listening to another input source, the AV receiver will automatically switch to the input to which the RI Dock is connected.

### Other Remote Operations

You can use the remote controller that came with the AV receiver to control other iPod/iPhone functions. The available functionality depends on the AV receiver.

#### Note

- If you use your iPod/iPhone with any other accessories, iPod/iPhone playback detection may not work.
- The System On function may not work depending on the RI Dock.

### iPod Alarm

If you use the Alarm function on your iPod to start playback, the AV receiver will turn on at the specified time and select your iPod as the input source automatically.

#### Note

- Depending on your iPod/iPhone model and generation, some of the linked operations may not be available.
- This linked operation won't work while a video is being played or when the sound set for the alarm is a built-in sound (Beep).
- This linked operation won't work with models on which music files cannot be used to set the alarm sound.

### ■ Operating Notes

- Use the AV receiver's volume control to adjust the playback volume.
- While your iPod/iPhone is inserted in the RI Dock, its volume control has no effect.
- If you do adjust the volume control on your iPod/iPhone while it's inserted in the RI Dock, be careful that it's not set too loud before you reconnect your headphones.

The Dock is sold separately. Models sold are different depending on the region.

For the latest information on the Onkyo Dock components, see the Onkyo web site at:  
<http://www.onkyo.com>

Before using the Onkyo Dock components, update your iPod/iPhone with the latest software, available from the Apple web site.

For supported iPod/iPhone models, see the instruction manual of the Onkyo Dock.

## Controlling Your iPod/iPhone

By pressing the **Remote Mode** button that's been programmed with the remote control code for your Dock, you can control your iPod/iPhone in the Dock with the buttons described further in this section.

See "Entering Remote Control Codes" for details on entering a remote control code (→ **page 72**).

See the Dock's instruction manual for more information.

### RI Dock

- Set the RI Dock's RI MODE switch to "HDD" or "HDD/DOCK".
- **Source** may not work with a remote control code (without **RI**). In this case, make an **RI** connection and enter the remote control code **81993** (with **RI**).


#### ■ With the RI Control

Make an **RI** connection and enter the remote control code **81993** (with **RI**).

- Set the AV receiver's Input Display to "**DOCK**" (→ **page 45**).

#### ■ Without the RI Control

You must enter the remote control code **82990** first (→ **page 73**).

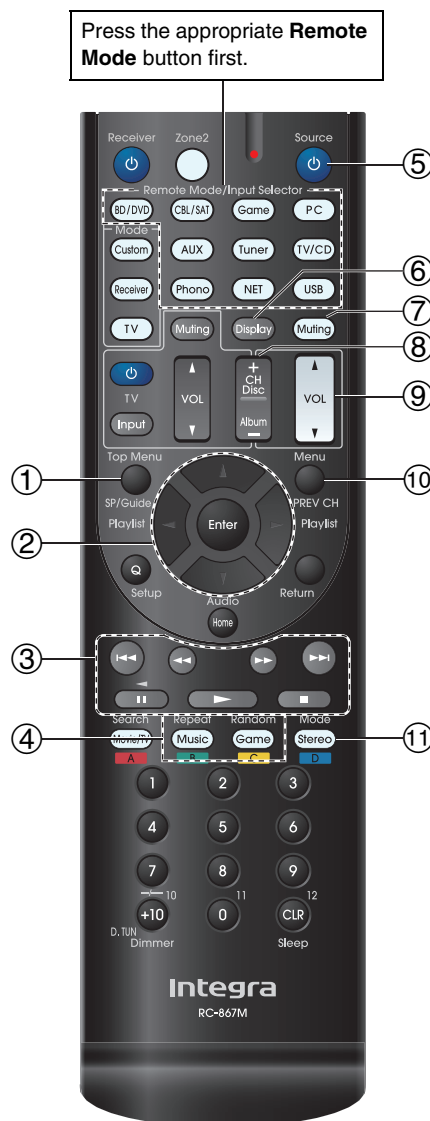

### ■ RI Dock operation

#### Available buttons

①	Top Menu*1	⑤	Source*2
②	▲/▼/◀/▶, Enter	⑥	Display*3
	Playlist ◀/▶	⑦	Muting
③	▶, II, ■, ◀◀, ▶▶, ◀◀, ▶▶	⑧	Album +/–
		⑨	VOL ▲/▼
④	Repeat	⑩	Menu
	Random	⑪	Mode*4

- With some iPod/iPhone models, generations and RI Docks, certain buttons may not work as expected.
- For detailed operation of iPod/iPhone, please refer to the instruction manual of the RI Dock.

\*1 **Top Menu** works as the mode button when used with the DS-A2 RI Dock.

\*2 This button does not turn the Onkyo DS-A2 or DS-A2X RI Dock on or off. Also, your iPod/iPhone may not respond the first time you press this button, in which case you should press it again. This is because the remote controller transmits the On and Standby commands alternately, so if your iPod/iPhone is already on, it will remain on when the remote controller transmits the On command. Similarly, if your iPod/iPhone is already off, it will remain off when the remote controller transmits the Off command.

\*3 **Display** turns on the backlight for a few seconds.

\*4 **Resume mode**

With the Resume function, you can resume playback of the song that was playing when you removed your iPod/iPhone from the Onkyo DS-A2 RI Dock.

# Troubleshooting

If you have any trouble using the AV receiver, look for a solution in this section. If you can't resolve the issue yourself, contact the dealer from whom you purchased this unit.


## Resetting the AV receiver

If you can't resolve the issue yourself, try resetting the AV receiver before contacting the dealer from whom you purchased this unit.

To reset the AV receiver to its factory defaults, turn it on and, while holding down **CBL/SAT**, press **On/Standby**. "Clear" will appear on the AV receiver's display and the AV receiver will enter standby mode.



Note that resetting the AV receiver will delete your radio presets and custom settings.

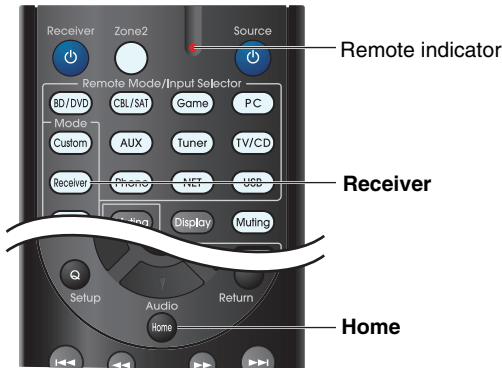

To reset the remote controller to its factory defaults, while holding down **Receiver**, press and hold down

**Home** until the remote indicator lights (about 3 seconds). Within 30 seconds, press **Receiver** again. The on-screen menus appear only on a TV that is connected to **HDMI OUT MAIN**.

## Power

### ■ Can't turn on the AV receiver

Make sure that the power cord is properly plugged into the wall outlet.

Unplug the power cord from the wall outlet, wait five seconds or more, then plug it in again.

### ■ The AV receiver turns off unexpectedly

The AV receiver will automatically enter standby mode when Auto Standby has been set and launches. (→ page 65)

### ■ The AV receiver turns off and after restoring the power, it turns off again

The protection circuit has been activated. Remove the power cord from the wall outlet immediately. Make sure that all speaker cables and input sources are properly connected, and leave the AV receiver with its power cord disconnected for 1 hour. After that, reconnect the power cord and turn the power on. If the AV receiver turns off again, avoid resetting it and unplug the power cord. Then contact the dealer from whom you purchased this unit. (→ page 13)

### Caution:

- If "CHECK SP WIRE" appears on the AV receiver's display, the speaker cables may be shorting.

### WARNING:

- If smoke, smell or abnormal noise is produced by the AV receiver, unplug the power cord from the wall outlet immediately and contact the dealer from whom you purchased this unit.

## Audio

### ■ There's no sound, or it's very quiet

Make sure that the digital input source is selected properly. (→ page 53)

Make sure that all audio connecting plugs are pushed in all the way (→ page 14).

Make sure that the inputs and outputs of all components are connected properly. (→ pages 14 to 19)

Make sure that the polarity of the speaker cables is correct, and that the bare wires are in contact with the metal part of each speaker terminal. (→ page 12)

Make sure that the input source is properly selected. (→ page 28)

Make sure that the speaker cables are not shorting. (→ page 13)

Check the volume. The AV receiver is designed for home theater enjoyment. It has a wide volume range, allowing precise adjustment.

If the **MUTING** indicator is flashing on the AV receiver's display, press the remote controller's **Muting** button to unmute the AV receiver. (→ page 45)

While a pair of headphones is connected to the **Phones** jack, no sound is output from the speakers. (→ page 19)

If there's no sound from a DVD player connected to an **HDMI IN**, check the DVD player's output settings, and be sure to select a supported audio format.

Check the digital audio output setting on the connected device. On some game consoles, such as those that support DVD, the default setting is off.

With some DVD-Video discs, you need to select an audio output format from a menu.

If your turntable uses an MC cartridge, you must connect an MC head amp, or an MC transformer.

Make sure that none of the connecting cables are bent, twisted, or damaged.

Not all listening modes use all speakers. (→ pages 40 to 44)

Specify the speaker distances and adjust the individual speaker levels. (→ page 55)

Make sure that the speaker setup microphone is not still connected.

If the input signal format is set to “PCM” or “DTS”. Set it to “Off”. (→ page 61)

### ■ Only the front speakers produce sound

When the Stereo or Mono listening mode is selected, only the front speakers and subwoofer produce sound. (→ page 42)

Make sure the speakers are configured correctly. (→ page 53)

### ■ Only the center speaker produces sound

If you use the Dolby Pro Logic IIx Movie, Dolby Pro Logic IIx Music, or Dolby Pro Logic IIx Game listening mode with a mono source, such as an AM radio station or mono TV program, the sound is concentrated in the center speaker.

Make sure the speakers are configured correctly. (→ page 53)

### ■ The surround speakers produce no sound

When the T-D (Theater-Dimensional), Stereo or Mono listening mode is selected, the surround speakers produce no sound.

Depending on the source and current listening mode, not much sound may be produced by the surround speakers. Try selecting another listening mode. (→ page 40)

Make sure the speakers are configured correctly. (→ page 53)

### ■ The center speaker produces no sound

When the Stereo or Mono listening mode is selected, the center speaker produces no sound.

Make sure the speakers are configured correctly. (→ page 53)

### ■ The front high and surround back speakers produce no sound

Depending on the current listening mode, no sound may be produced by the front high and surround back speakers. Select another listening mode. (→ page 40)

Depending on the sources, the sound produced by the front high and surround back speakers may be weak.

Make sure the speakers are configured correctly. (→ page 54)

When Powered Zone 2 is used, playback in the main room is reduced to 5.1 channels and the front high and surround back speakers produce no sound.

### ■ The subwoofer produces no sound

When you play source material that contains no information in the LFE channel, the subwoofer produces no sound.

Make sure the speakers are configured correctly. (→ page 53)

### ■ There's no sound with a certain signal format

Check the digital audio output setting on the connected device. On some game consoles, such as those that support DVD, the default setting is off.

With some DVD-Video discs, you need to select an audio output format from a menu.

Depending on the input signal, some listening modes cannot be selected. (→ pages 40 to 44)

### ■ Can't get 6.1/7.1 playback

If no surround back speakers and front high speakers are connected, or the Zone 2 speakers are being used, 6.1/7.1 playback is not possible.

Depending on the number of connected speakers, it is not always possible to select all of the listening modes. (→ pages 40 to 44)

### ■ The speaker volume cannot be set as required

Check to see if a maximum volume has been set. (→ page 62)

If the volume level of each individual speaker has been adjusted to high positive values, then the maximum master volume possible may be reduced. Note that the individual speaker volume levels are set automatically after the Audyssey MultEQ® Room Correction and Speaker Setup has been performed. (→ pages 23, 55)

### ■ Noise can be heard

Using cable ties to bundle audio cables with power cords, speaker cables, and the like may degrade the audio performance, so refrain from doing it.

An audio cable may be picking up interference. Try repositioning your cables.

### ■ The Late Night function doesn't work

Make sure the source material is Dolby Digital, Dolby Digital Plus, and Dolby TrueHD. (→ page 49)

Make sure that the “TrueHD Loudness Management” setting is not set to “Off”. The Late Night function doesn't work when this setting is disabled. (→ page 56)

### ■ About DTS signals

When DTS program material ends and the DTS bitstream stops, the AV receiver remains in DTS listening mode and the **dts** indicator remains on. This is to prevent noise when you use the pause, fast forward, or fast reverse function on your player. If you switch your player from DTS to PCM, you may not hear any sound because the AV receiver does not switch formats immediately. In such case, you should stop your player for about three seconds and then resume playback.

With some CD and LD players, you won't be able to playback DTS material properly even though your player is connected to a digital input on the AV receiver. This is usually because the DTS bitstream has been processed (e.g., output level, sampling rate, or frequency response changed) and the AV receiver doesn't recognize it as a genuine DTS signal. In such cases, you may hear noise.

Playing DTS program material, using the pause, fast forward, or fast reverse function on your player may produce a short audible noise. This is not a malfunction.

### ■ The beginning of audio received by an HDMI IN can't be heard

Since it takes longer to identify the format of an HDMI signal than it does for other digital audio signals, audio output may not start immediately.

## Video

### ■ There's no picture

Make sure that all video connecting plugs are pushed in all the way. (→ [page 17](#))

Make sure that each video component is properly connected. (→ [page 14](#))

If your TV is connected to the HDMI output(s), select “----” in the “**HDMI Input**” setting to watch composite video, and component video sources. (→ [page 52](#))

If the video source is connected to a component video input, you must assign that input to an input selector, and your TV must be connected to either the HDMI output(s) or **COMPONENT VIDEO OUT**. (→ [pages 14, 52](#))

If the video source is connected to a composite video input, you must assign that input to an input selector, and your TV must be connected to the HDMI output or the corresponding composite video output. (→ [page 14, 53](#))

If the video source is connected to an HDMI input, you must assign that input to an input selector, and your TV must be connected to the HDMI output(s). (→ [pages 14, 52](#))

On your TV, make sure that the video input to which the AV receiver is connected is selected.

When the “**Monitor Out**” setting is set to “**Both**”, the “**HDMI Through**” setting is only available for the **HDMI OUT MAIN** jack. (→ [pages 51, 64](#))

### ■ There's no picture from a source connected to an HDMI IN

Reliable operation with an HDMI-to-DVI adapter is not guaranteed. In addition, video signals from a PC are not guaranteed. (→ [page 89](#))

When the resolution is set to any resolution not supported by the TV, no video is output from the HDMI outputs. (→ [page 51](#))

If the message “**Resolution Error**” appears on the AV receiver's display, this indicates that your TV does not support the current video resolution and you need to select another resolution on your DVD player.

### ■ The on-screen menus don't appear

On your TV, make sure that the video input to which the AV receiver is connected is selected.

When the AV receiver is not connected to a TV via **HDMI OUT MAIN**, on-screen menus are not displayed.

### ■ The on-screen display does not appear

Depending on the input signal, the on-screen display may not appear when the input signal from **HDMI IN** is output to a device connected to **HDMI OUT MAIN**.

## Tuner

### ■ Reception is noisy, FM stereo reception is noisy, or the FM STEREO indicator doesn't light

Relocate your antenna.

Move the AV receiver away from your TV or computer.

Listen to the station in mono. (→ [page 37](#))

When listening to an AM station, operating the remote controller may cause noise.

Passing cars and airplanes can cause interference.

Concrete walls weaken radio signals.

If nothing improves the reception, install an outdoor antenna.

## Remote Controller

### ■ The remote controller doesn't work

Before operating this unit, be sure to press **Receiver**.

Make sure that the batteries are installed with the correct polarity. (→ [page 10](#))

Install new batteries. Don't mix different types of batteries, or old and new batteries. (→ [page 10](#))

Make sure that the remote controller is not too far away from the AV receiver, and that there's no obstruction between the remote controller and the AV receiver's remote control sensor. (→ [page 10](#))

Make sure that the AV receiver is not subjected to direct sunshine or inverter-type fluorescent lights. Relocate if necessary.

If the AV receiver is installed in a rack or cabinet with colored-glass doors, the remote controller may not work reliably when the doors are closed.

Make sure you've selected the correct remote controller mode. (→ [pages 10, 74](#))

When using the remote controller to control other manufacturers' AV components, some buttons may not work as expected.

Make sure you've entered the correct remote control code. (→ [page 72](#))

Make sure to set the same ID on both the AV receiver and remote controller. (→ [page 67](#))

### ■ Can't control other components

If it's an Integra/Onkyo component, make sure that the **RI** cable and analog audio cable are connected properly.

Connecting only an **RI** cable won't be enough. (→ [page 19](#))

Make sure you've selected the correct remote controller mode. (→ [pages 10, 74](#))

If you've connected an cassette tape deck to the **TV/CD IN** jack, or an **RI Dock** to the **TV/CD IN** or **GAME IN** jacks, for the remote controller to work properly, you must set the input display appropriately. (→ [page 45](#))

If you cannot operate it, you will need to enter the appropriate remote control code. (→ [page 72](#))

To control another manufacturer's component, point the remote controller at that component. (→ [page 72](#))

To control an Integra/Onkyo component that's connected via **RI**, point the remote controller at the AV receiver. Be sure to enter the appropriate remote control code first. (→ [page 73](#))

To control an Integra/Onkyo component that's not connected via **RI**, point the remote controller at the component. Be sure to enter the appropriate remote control code first. (→ [page 73](#))

The entered remote control code may not be correct. If more than one code is listed, try each one.

## RI Dock for iPod/iPhone

### ■ There's no sound

Make sure your iPod/iPhone is actually playing.

Make sure your iPod/iPhone is properly inserted in the Dock.

Make sure the AV receiver is turned on, the correct input source is selected, and the volume is turned up.



Make sure the plugs are pushed in all the way.

Try resetting your iPod/iPhone.

### ■ There's no video

Make sure that your iPod/iPhone model's TV OUT setting is set to On.

Make sure the correct input is selected on your TV or the AV receiver.

Some versions of the iPod/iPhone do not output video.

### ■ The AV receiver's remote controller doesn't control my iPod/iPhone

Make sure your iPod/iPhone is properly inserted in the Dock. If your iPod/iPhone is in a case, it may not connect properly to the Dock. Always remove your iPod/iPhone from the case before inserting it into the Dock.

The iPod/iPhone cannot be operated while it's displaying the Apple logo.

Make sure you've selected the right remote mode.  
(→ page 77)

When you use the AV receiver's remote controller, point it toward your AV receiver.

If you still can't control your iPod/iPhone, start playback by pressing your iPod/iPhone model's Play button. Remote operation should then be possible.

Try resetting your iPod/iPhone.

Depending on your iPod/iPhone, some buttons may not work as expected.

### ■ The AV receiver unexpectedly selects my iPod/iPhone as the input source

Always pause iPod/iPhone playback before selecting a different input source. If playback is not paused, the Direct Change function may select your iPod/iPhone as the input source by mistake during the transition between tracks.

### ■ iPod/iPhone doesn't work properly

Try reconnecting your iPod/iPhone.

## Zone 2

### ■ There's no sound

Audio can be output only when analog, **NET** or **USB** input source is selected in Zone 2.

### ■ The Zone 2 speakers produce no sound

Powered Zone 2 cannot be used if "Speakers Type (Front)" is set to "Bi-Amp". (→ page 54)

## Wi-Fi (Wireless LAN) Network

### ■ Cannot access to Wi-Fi (Wireless LAN) network or Sound playback is interrupted and communication doesn't work

Check the connection of power cords of the AV receiver and Wi-Fi router and the power of Wi-Fi router. Try restarting the Wi-Fi router.

The setting of SSID and encryption (WEP, etc.) is not correct. Make the same settings for network and the AV receiver.

Cannot receive radio wave due to a bad connection. Shorten the distance from wireless LAN access point or remove obstacles for a good visibility, and try again. Place the AV receiver away from microwave ovens or other access points.

2.4 GHz band for wireless LAN may not be enough. Connect the **ETHERNET** port and router with the Ethernet cable after selecting "Wired" in "Network Connection" setting in "Network". (→ pages 15, 66)

Place the AV receiver away from the devices emitting electromagnetic waves on the 2.4 GHz band (microwave ovens, game consoles, etc.). If this does not solve the problem, stop using other devices which emit electromagnetic waves.

When other wireless LAN devices are used near the AV receiver, several issues such as interrupted playback and communication may occur. You can avoid these issues by changing the channel of your Wi-Fi router. For instructions on changing channels, see the instruction manual provided with your Wi-Fi router.

If there is a metallic object near the AV receiver, wireless LAN connection may not be possible as the metal can effect on the radio wave.

If there is more than one access point in the network, separate each access point.

It is recommended to place the Wi-Fi router (access point) and the AV receiver in the same room.

### ■ Connection cannot be completed in spite of pressing WPS button on the Wi-Fi router

The setting on the Wi-Fi router may be switched to manual setting. Switch it to automatic setting.

Try manual setting. It may work.

### ■ Appropriate Access Point are not displayed on the list of Access Points on the setup screen displayed on the TV

If SSID is hidden by the setting (Stealth mode, etc.) or Any connection is set to off on the Wi-Fi router, the appropriate SSID is not displayed. Change these settings, and try again.

## Bluetooth

### ■ Music playback is unavailable on the AV receiver even after successful Bluetooth connection.

Depending on the characteristics or specifications of your Bluetooth-enabled device, playback on the AV receiver is not guaranteed.

The audio is not output from the AV receiver if audio volume on the Bluetooth-enabled device is set small. Change the setting to greater.

The output/Input selector switch may be installed depending on the type of Bluetooth-enabled device. Switch it to output, and try again.

If the Bluetooth-enabled device is not connected to the AV receiver, the audio cannot be played back in spite of the playback on the Bluetooth-enabled device. Check if the connection is done again. (Check if the audio output is set to the AV receiver.)

### ■ The audio is interrupted

Problems may occur on the Bluetooth-enabled device. Look for information on the web page.

### ■ The audio quality is poor after connection with a Bluetooth-enabled device.

The Bluetooth reception is poor. Move the Bluetooth-enabled device closer to the AV receiver or remove any obstacle between the Bluetooth-enabled device and the AV receiver.

### ■ Cannot connect with the AV receiver.

Check the connection of the AV receiver's power cord and ON/OFF of the Bluetooth-enabled device. Restarting the Bluetooth-enabled device may solve the problem.

The Bluetooth-enabled device does not support the profiles required for the AV receiver.

The Bluetooth function of the Bluetooth-enabled device is not enabled. Refer to the user manual of the Bluetooth-enabled device for how to enable the function.

Bluetooth-enabled devices may not be able to be used near the devices which use a 2.4 GHz radio wave frequency such as microwave ovens or codeless phones due to radio wave interferences.

### ■ Bluetooth connection cannot be built

When building a Bluetooth connection between the AV receiver and your Bluetooth-enabled device for the first time, if the connection is fail, you need to power off your Bluetooth-enabled device and power on again to clear the device name, and build the connection again.

If there is metallic object near the AV receiver, Bluetooth connection may not be possible as the metal can effect on the radio wave.

If the wireless LAN and Bluetooth connections are used at the same time, try to connect the **ETHERNET** port and router with the Ethernet cable after selecting "**Wired**" in "**Network Connection**" setting in "**Network**" for a better connection. (→ pages 15, 66)

## Music Server and Internet Radio

### ■ Can't access the server or Internet radio

Certain network service or contents available through this device may not be accessible in case the service provider terminates its service.

Check the network connection between the AV receiver and your router or switch. (→ page 15)

Make sure that your modem and router are properly connected, and make sure they are both turned on.

Make sure the server is up and running and compatible with the AV receiver. (→ page 90)

Check the "**Network**" settings. (→ page 66)

### ■ Playback stops while listening to music files on the server

Make sure your server is compatible with the AV receiver. (→ page 90)

If you download or copy large files on your computer, playback may be interrupted. Try closing any unused programs, use a more powerful computer, or use a dedicated server.

If the server is serving large music files to several networked devices simultaneously, the network may become overloaded and playback may be interrupted. Reduce the number of playback devices on the network, upgrade your network, or use a switch instead of a hub.

### ■ Can't connect to the AV receiver from a Web browser

If you're using DHCP, your router may not always allocate the same IP address to the AV receiver, so if you find that you can't connect to a server or Internet radio station, recheck the AV receiver's IP address on the "**Network**" screen. (→ page 66)

Check the "**Network**" settings. (→ page 66)

## USB Device Playback

### ■ Can't access the music files on a USB device

Make sure the USB device is plugged in properly.

The AV receiver supports USB devices that support the USB mass storage device class. However, playback may not be possible with some USB devices even if they conform to the USB mass storage device class. (→ page 90)

Depending on the type of format, the playback from a USB device may not be performed normally. Check the type of the file formats that is supported. (→ page 91)

USB memory devices with security functions cannot be played.

## Others

### ■ Standby power consumption

In the following cases, the power consumption in standby mode may reach up to a maximum of 8.6 W:

- The "**HDMI CEC (RIHD)**" setting is set to "**On**".  
(Depending on the TV status, the AV receiver will enter standby mode as usual.)
- The "**HDMI Through**" setting is set to other than "**Off**".
- The "**Network Standby**" setting is set to "**On**".

(→ pages 63, 64, 66)

If an MHL-enabled mobile device connected to **HDMI IN 1** is charged, the power consumption in standby mode will increase than the figure above. (→ page 15)

### ■ The sound changes when I connect my headphones

When a pair of headphones is connected, the listening mode is set to Stereo, unless it's already set to Stereo, Mono, or Direct.

### ■ The speaker distance cannot be set as required

The values entered may be automatically adjusted with values best-suited for your home theater.

### ■ How do I change the language of a multiplex source

Use the "**Multiplex**" setting in the "**Audio Adjust**" menu to select "**Main**" or "**Sub**". (→ page 55)

### ■ The **RI** functions don't work

To use **RI**, you must make an **RI** connection and an analog audio connection (RCA) between the component and AV receiver, even if they are connected digitally. (→ page 19)

While Zone 2 is selected, the **RI** functions don't work. (→ page 19)

### ■ The functions System On/Auto Power On and Direct Change don't work for components connected via **RI**

These functions don't work when Zone 2 is turned on. (→ page 19)

■ **When performing Automatic Speaker Setup, the measurement fails and the message “Ambient noise is too high.” is displayed.**

This can be caused by a malfunction in your speaker unit. Check if the unit produces normal sounds.

■ **The following settings can be made for the composite video inputs**

• **Video Attenuation**

If you have a game console connected to the composite video input, and the picture isn't very clear, you can attenuate the gain.

**Video ATT :Off:** (default).

**Video ATT :On:** Gain is reduced by 2 dB.

To make this setting, you must use the buttons on the AV receiver.

Press the input selector button for the source that you want to set, simultaneously with **Home**. Note that the input selector must be assigned to a composite video input. While holding down the input selector button, press **Home** until “**Video ATT :On**” appears on the AV receiver's display. Then, release both buttons. To turn the setting off, repeat the above process so that “**Video ATT :Off**” appears on the AV receiver's display, and release the buttons.

■ **If the picture on your TV/monitor connected to the HDMI output(s) is unstable, try switching the DeepColor function off**

To turn off the DeepColor function, simultaneously press the **Game** and **On/Standby** buttons on the AV receiver. While holding down **Game**, press **On/Standby** until “**Deep Color:Off**” appears on the AV receiver's display. Then, release both buttons. To reactivate the DeepColor function, repeat the above process until “**Deep Color:On**” appears on the AV receiver's display and release the buttons.

## Radio Wave Caution

The AV receiver uses a 2.4 GHz radio wave frequency, which is a band used by other wireless systems as 1 and 2 described below.

1. **Devices which use a 2.4 GHz radio wave frequency**

- Cordless phones
- Cordless facsimiles
- Microwave ovens
- Wireless LAN devices (IEEE802.11b/g/n)
- Wireless AV equipment
- Wireless controllers for game systems
- Microwave oven-based health aids
- Video transmitter
- Specific type of external monitor and LCD display

2. **Less common devices which use a 2.4 GHz radio wave frequency**

- Anti-theft systems
- Amateur radio stations (HAM)
- Warehouse logistic management systems
- Discrimination systems for train or emergency vehicles

If these devices and the AV receiver are used at the same time, the audio may be undesirably stopped or disturbed due to a radio wave interference.

Suggestions for improvement

- Switch off the devices which emit the radio wave.
- Place the interfering devices away from the AV receiver.
- The AV receiver uses radio wave, and a third person can receive the wave on purpose or accidentally. Do not use the communication for important or fatal matters.

- We assume no responsibility whatsoever for any error or damage of network environment or access device resulting from the use of this apparatus. Confirm with the provider or access device maker for more information.

## Scope of Operation

Use of the AV receiver is limited to home use. (Transmission distances may be reduced depending on communication environment.)

**In the following locations, poor condition or inability to receive radio waves may cause the audio to be interrupted or stopped:**

- In reinforced concrete buildings or steel framed or iron framed buildings.
- Near large metallic furniture.
- In a crowd of people or near a building or obstacle.
- In a location exposed to the magnetic field, static electricity or radio wave interference from radio communication equipment using the same frequency band (2.4 GHz) as the AV receiver, such as a 2.4 GHz wireless LAN device (IEEE802.11b/g/n) or microwave oven.
- If you live in a heavily populated residential area (apartment, townhouse, etc.) and if your neighbor's microwave oven is placed near your AV receiver, you may experience radio wave interference. If this occurs, move your AV receiver to a different place. When the microwave oven is not in use, there will be no radio wave interference.

## Radio Wave Reflections

The radio waves received by the AV receiver include the radio wave coming directly from the devices and waves coming from various directions due to reflections by walls, furniture and building (reflected waves). The reflected waves (due to obstacles and reflecting objects) further produce a variety of reflected waves as well as variation in reception condition depending on locations. If the audio cannot be received properly due to this phenomenon, try moving the location of the wireless LAN device a little. Also note that audio may be interrupted due to the reflected waves when a person crosses or approaches the space between the AV receiver and the wireless LAN device.

- We assume no responsibility whatsoever for any damages resulting from the use of this apparatus except in the cases deemed acceptable under the applicable laws and regulations.
- Operation in all environment is not guaranteed for wireless LAN. The communication may not be possible or have desirable communication speed.

## Precautions

- Do not use this apparatus near an electronic device handling high-accuracy controls or weak signals. Doing so may cause an accident due to a malfunction of the device.
- Do not use this apparatus in use prohibited location such as an aircraft equipment or a hospital. Doing so may cause an accident due to a malfunction of an electronic device or an electro-medical apparatus. Follow the instructions of the medical facilities.

## ■ Electronic device which requires cautions

Hearing aid, pace maker, other medical electronic devices, fire alarm, automatic door, and other automatic control device.

When using a pace maker or other medical electronic devices, confirm with the medical electronic device maker or dealer for the effect of the radio wave.

The AV receiver contains a microcomputer for signal processing and control functions. In very rare situations, severe interference, noise from an external source, or static electricity may cause it to lockup. In the unlikely event that this happens, unplug the power cord from the wall outlet, wait at least five seconds, and then plug it back in.

Onkyo is not responsible for damages (such as CD rental fees) due to unsuccessful recordings caused by the unit's malfunction. Before you record important data, make sure that the material will be recorded correctly.

Before disconnecting the power cord from the wall outlet, set the AV receiver to standby.

## DISCLAIMER

Through this device you are able to link to other services or websites which are not under the control of any company which has designed, manufactured or distributed/have distributed this device, and its affiliates (collectively, "Company"). We have no control over the nature, content and availability of those services. The inclusion of any links does not necessarily imply a recommendation or endorse the views expressed within them.

All information, content and services available through this device belong to third parties and are protected by copyright, patent, trademark and/or other intellectual property laws of applicable countries. The information, content and services provided through this device are for your personal, noncommercial use only. Any information, content or services may not be used in any manner other than previously approved by the appropriate content owner or service provider.

You may not modify, copy, republish, translate, exploit, create derivative works, upload, post, transmit, sell or distribute in any manner any information, content or services available through this device, unless expressly permitted by the appropriate copyright, patent, trademark and/or other intellectual property owner, including, without limitation, content owner or service provider.

THE CONTENT AND SERVICES AVAILABLE THROUGH THIS DEVICE ARE PROVIDED "AS IS". COMPANY DOES NOT WARRANT INFORMATION, CONTENT OR SERVICES SO PROVIDED, EITHER EXPRESSLY OR IMPLIEDLY, FOR ANY PURPOSE.

COMPANY EXPRESSLY DISCLAIMS ANY WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Company makes no representation or warranty of any kind, express or implied, about the completeness, accuracy, validity, legality, reliability, suitability or availability with respect to the information, content or services available through this device. Company shall not be liable, whether in contract or tort, including negligence and strict liability, for any direct, indirect, special, incidental or consequential damages or any other damages arising out of, or in connection with, any information contained in, or as a result of the use of any content or service by you or any third party, even if Company has been advised of the possibility of such damages, nor shall Company be liable for any third party claims against users of this device or any third party.

In no event shall Company be responsible nor liable for, without limiting the generality of the foregoing, any interruption or suspension of any information, content or service available through this device. Company is neither responsible nor liable for customer service related to the information, content and services available through this device.

Any question or request for service relating to the information, content or services should be made directly to the appropriate content owners and services providers.

## Video Resolution Chart

The following tables show how video signals at different resolutions are output by the AV receiver.

✓<sup>3</sup>: Output available

Input \ Output		HDMI						
		4K <sup>1</sup>	1080p/24	1080p	1080i	720p	480p/576p	480i/576i
HDMI	4K <sup>2</sup>	✓ <sup>3</sup>						
	1080p/24	✓	✓ <sup>3</sup>					
	1080p	✓		✓ <sup>3</sup>				
	1080i	✓		✓	✓ <sup>3</sup>	✓		
	720p	✓		✓	✓	✓ <sup>3</sup>		
	480p/576p	✓		✓	✓	✓	✓ <sup>3</sup>	
	480i/576i	✓		✓	✓	✓	✓	✓ <sup>3</sup>
Component	1080p							
	1080i							
	720p							
	480p/576p							
Composite	480i/576i	✓		✓	✓	✓	✓	✓ <sup>3</sup>
	480i/576i	✓		✓	✓	✓	✓	✓ <sup>3</sup>

Input \ Output		Component					Composite
		1080p	1080i	720p	480p/576p	480i/576i	480i/576i
HDMI	4K <sup>2</sup>						
	1080p/24						
	1080p						
	1080i						
	720p						
	480p/576p						
	480i/576i						
Component	1080p	✓					
	1080i		✓				
	720p			✓			
	480p/576p				✓		
	480i/576i					✓	
Composite	480i/576i						✓

\*1 Supported resolutions: [3840 × 2160 30 Hz], [3840 × 2160 25 Hz], [3840 × 2160 24 Hz], [4096 × 2160 24 Hz]

\*2 The AV receiver is compatible with **HDMI IN 1** to **HDMI IN 4**. However, the number of the player that outputs video signal at 4K resolution or the same level at the same time may be up to three.

\*3 Supported resolutions for **HDMI OUT SUB**.

# Firmware Update

To update the firmware of the AV receiver, you can choose from the following two methods: update via network, or update via USB storage. Choose the one that best suits your environment. Before proceeding with the update, please read the corresponding explanations carefully.

## ■ Update via network

You need a Internet connection to update the firmware.

## ■ Update via USB storage (→ page 87)

Please prepare a USB storage device such as a USB flash memory stick. You need at least 32 MB of available space to update the firmware.

### Note

- Check the network connection before updating.
- Do not touch any cable or device connected to the AV receiver during the update process.
- Do not attempt to access the AV receiver from your PC while it is being updated.
- Do not shutdown the power of the AV receiver while it is being updated.
- The storage media in the USB card reader may not work.
- If the USB device is partitioned, each section will be treated as an independent device.
- If the USB device contains a lot of data, the AV receiver may take a while to read it.
- Operation is not guaranteed for all USB devices, which includes the ability to power them.
- Onkyo takes no responsibility whatsoever for the loss or damage of data resulting from the use of a USB device with the AV receiver. Onkyo recommends that you back up your important music files beforehand.
- If you connect a USB hard disk drive to the USB port, Onkyo recommends that you use its AC adapter to power it.
- USB hubs and USB devices with hub functions are not supported. Do not connect your USB device via a USB hub.
- USB devices with security functions are not supported.

### Limitation of liability

The program and accompanying online documentation are furnished to you for use at your own risk. Onkyo will not be liable and you will have no remedy for damages for any claim of any kind whatsoever concerning your use of the program or the accompanying online documentation, regardless of legal theory, and whether arising in tort or contract. In no event will Onkyo be liable to you or any third party for any special, indirect, incidental, or consequential damages of any kind, including, but not limited to, compensation, reimbursement or damages on account of the loss of present or prospective profits, loss of data, or for any other reason whatsoever.

See the Integra web site for latest information.

## Updating the Firmware via Network

The AV receiver allows you to update the firmware using network connection.

### Note

- Make sure your AV receiver and TV are turned on and the AV receiver is connected to the Internet.
- Never unplug or turn off the AV receiver while it is being updated.
- Never plug or unplug an HDMI or Ethernet cable during the update process.
- Do not attempt to access the AV receiver from your PC while it is being updated.
- Never unplug the power cord during the update process.
- It takes up to 20 minutes to complete the firmware update.
- The AV receiver will retain all your settings after the update is finished.

## Before Starting

- Set the “**HDMI CEC (RIHD)**” setting to “**Off**” (→ page 63).
- Turn off the controller device connected via RS232 and network.
- Turn off Multi Zone if this function is present.
- Stop playback of contents from Internet Radio, USB or servers, etc.

## Update Procedure

### 1 Press Receiver followed by Home on the remote controller.

The Home menu appears on the TV screen.

### 2 Select “Firmware Update” and press Enter.

Note that the “**Firmware Update**” option will be grayed out for a short while after the AV receiver is turned on. Please wait until it becomes operable.

### 3 Select “Update via NET” and press Enter.

Note that this option will not be available if there is no firmware file newer than the currently installed version. If the AV receiver is not connected to the internet, “**Update via NET**” is not displayed.

### 4 Select “Update” and press Enter.

The update process will begin. During the update process, the on-screen display may disappear depending on the updated program. When this occurs, you can still view the update progress on the AV receiver’s display. The on-screen display will reappear after the update is complete, and upon turning the AV receiver off and on again.

### 5 The message “Completed!” appears on the AV receiver’s display, indicating that the update has been completed.

## 6 Press **On/Standby** on the front panel. The AV receiver will enter standby mode.

Do not use **Receiver** on the remote controller.  
The AV receiver will enter standby mode automatically in 3 minutes regardless of whether **On/Standby** is pressed.  
Congratulations! You now have the latest firmware installed on your Integra AV receiver.

## Troubleshooting

### Case 1:

If an error occurs, “**Error!! \*-\*\***” is displayed on the AV receiver’s display. (Alpha-numeric characters on the front display are denoted by asterisks.) Refer to the following table and take appropriate action.

### ■ Errors during an update via network

Error Code	Description
*-01, *-10	The Ethernet cable was not detected. Reconnect the cable properly.
*-02, *-03, *-04, *-05, *-06, *-11, *-13, *-14, *-16, *-17, *-18, *-20, *-21	Internet connection error. Check the following items: <ul style="list-style-type: none"> <li>• Make sure the IP address, subnet mask, gateway address, and DNS server are configured properly.</li> <li>• Make sure the router is turned on.</li> <li>• Make sure the AV receiver and the router are connected with an Ethernet cable.</li> <li>• Make sure your router is configured properly. See the instruction manual of the router.</li> <li>• If your network allows only one client connection and there is any other device already connected, the AV receiver will not be able to access the network. Consult your Internet Service Provider (ISP).</li> <li>• If your modem does not function as a router, you will need a router. Depending on your network, you may need to configure the proxy server if necessary. See the document provided by your ISP. If you are still unable to access the Internet, the DNS or proxy server may be temporarily down. Contact your ISP.</li> </ul>
Others	Retry the update procedure from the beginning. If the error persists, please contact Integra Support and provide the error code.

### Case 2:

If an error occurs during the update process, disconnect then reconnect the AC power cord and try again.

### Case 3:

If you do not have an Internet connection to the network, please contact Integra Support.

## Updating the Firmware via USB

The AV receiver allows you to update the firmware using a USB device.

### Note

- Never unplug or turn off the AV receiver during the update process.
- Never plug or unplug an HDMI cable or a USB device during the update process.
- Never unplug the USB storage device containing the firmware file or the AC power cord during the update process.
- Do not attempt to access the AV receiver from your PC while it is being updated.
- It takes up to 20 minutes to complete the firmware update.
- The AV receiver will retain all your settings after the update is finished.

## Before Starting

- Set the “**HDMI CEC (RIHD)**” setting to “**Off**” (→ page 63).
- Turn off the controller device connected via RS232 and network.
- Turn off Multi Zone if this function is present.
- Stop playback of contents from Internet Radio, USB or servers, etc.
- If there is any data in the USB device, remove it first.

## Update Procedure

- 1 Connect a USB device to your PC. If there is any data in the USB device, remove it first.**
- 2 Download the firmware file from the Integra web site. The file name is as follows:**  
ONKAVER\*\*\*\* \*\*\*\*\*.zip  
**Unzip the downloaded file. The numbers of folders and files differ according to the model.**
- 3 Copy all the extracted folders including all folders and files to the root folder of the USB device. Be careful not to copy the zip file.**
- 4 Remove the USB device from your PC and connect it to the USB port on the AV receiver.**
- 5 Make sure the AV receiver and TV are turned on.**  
If the AV receiver is in standby mode, press **⏻ On/Standby** on the AV receiver to light up the front display.
- 6 Select the USB input source.**  
“**Now Initializing...**” appears on the AV receiver’s display and then the name of the USB device is displayed. It takes 20 to 30 seconds to recognize the USB device.
- 7 Press Receiver followed by Home on the remote controller.**  
The Home menu appears on the TV screen.
- 8 Select “Firmware Update” and press Enter.**
- 9 Select “Update via USB” and press Enter.**  
Note that this option will not be available if there is no firmware file newer than the currently installed version. If the AV receiver is not connected to the internet, “**Update via USB**” is not displayed.

### 10 Select “Update” and press Enter.

The update process will begin.

During the update process, the on-screen display may disappear depending on the updated program. When this occurs, you can still view the update progress on the AV receiver’s display. The on-screen display will reappear after the update is complete, and upon turning the AV receiver off and on again.

Do not turn off the AV receiver and do not remove the USB device during the update process.

### 11 The message “Completed!” appears on the AV receiver’s display, indicating that the update has been completed. Remove the USB device.

### 12 Press **⏻ On/Standby** on the front panel. The AV receiver will enter standby mode.

Do not use **⏻ Receiver** on the remote controller. The AV receiver will enter standby mode automatically in 3 minutes regardless of whether **⏻ On/Standby** is pressed.  
Congratulations! You now have the latest firmware installed on your Integra AV receiver.

## Troubleshooting

### Case 1:

If an error occurs, “**Error!! \*-\*\***” is displayed on the AV receiver’s display. (Alpha-numeric characters on the front display are denoted by asterisks.) Refer to the following table and take appropriate action.

### ■ Errors during an update via USB

Error Code	Description
*-01, *-10	The USB device was not detected. Make sure the USB flash memory or USB cable is properly connected to the USB port. If the USB storage device has its own power supply, use it to power the USB device.
*-05, *-13, *-20, *-21	The firmware file was not found in the root folder of the USB device, or the firmware file is for another model. Retry and download the file on the support page of the web site, following the on-site instructions. If the error persists, please contact Integra Support and provide the error code.
Others	Retry the update procedure from the beginning. If the error persists, please contact Integra Support and provide the error code.

### Case 2:

If an error occurs during the update process, disconnect then reconnect the AC power cord and try again.



# About HDMI

Designed to meet the increased demands of digital TV, HDMI (High Definition Multimedia Interface) is a new digital interface standard for connecting TVs, projectors, Blu-ray Disc/DVD players, set-top boxes, and other video components. Until now, several separate video and audio cables have been required to connect AV components. With HDMI, a single cable can carry control signals, digital video, and up to eight channels of digital audio (2-channel PCM, multichannel digital audio, and multichannel PCM).

The HDMI video stream (i.e., video signal) is compatible with DVI (Digital Visual Interface)\*<sup>1</sup>, so TVs and displays with a DVI input can be connected by using an HDMI-to-DVI adapter cable. (This may not work with some TVs and displays, resulting in no picture.)

The AV receiver uses HDCP (High-bandwidth Digital Content Protection)\*<sup>2</sup>, so only HDCP-compatible components can display the picture.

The AV receiver's HDMI interface is based on the following:

Audio Return Channel, 3D, x.v.Color, DeepColor, Lip Sync, 4K (up-scaling and Passthrough), DTS-HD Master Audio, DTS-HD High Resolution Audio, Dolby TrueHD, Dolby Digital Plus, DSD and Multichannel PCM.

## Supported Audio Formats

- 2-channel linear PCM (32–192 kHz, 16/20/24 bit)
- Multichannel linear PCM (up to 7.1 ch, 32–192 kHz, 16/20/24 bit)
- Bitstream (DSD, Dolby Digital, Dolby Digital Plus, Dolby TrueHD, DTS, DTS-HD High Resolution Audio, DTS-HD Master Audio)

Your Blu-ray Disc/DVD player must also support HDMI output of the above audio formats.

## About Copyright Protection

The AV receiver supports HDCP (High-bandwidth Digital Content Protection)\*<sup>2</sup>, a copy-protection system for digital video signals. Other devices connected to the AV receiver via HDMI must also support HDCP.

\*<sup>1</sup> DVI (Digital Visual Interface): The digital display interface standard set by the DDWG\*<sup>3</sup> in 1999.

\*<sup>2</sup> HDCP (High-bandwidth Digital Content Protection): The video encryption technology developed by Intel for HDMI/DVI. It's designed to protect video content and requires a HDCP-compatible device to display the encrypted video.

\*<sup>3</sup> DDWG (Digital Display Working Group): Lead by Intel, Compaq, Fujitsu, Hewlett Packard, IBM, NEC, and Silicon Image, this open industry group's objective is to address the industry's requirements for a digital connectivity specification for high-performance PCs and digital displays.

### Note

- The HDMI video stream is compatible with DVI (Digital Visual Interface), so TVs and displays with a DVI input can be connected by using an HDMI-to-DVI adapter cable. (Note that DVI connections only carry video, so you'll need to make a separate connection for audio.) However, reliable operation with such an adapter is not guaranteed. In addition, video signals from a PC are not supported.
- The HDMI audio signal (sampling rate, bit length, etc.) may be restricted by the connected source component. If the picture is poor or there's no sound from a component connected via HDMI, check its setup. Refer to the connected component's instruction manual for details.

# Network/USB Features

## Network Requirements

### ■ Ethernet Network

For the best results, a 100Base-TX switched Ethernet network is recommended. Although it's possible to play music on a computer that's connected to the network wirelessly, playback may be unreliable, so it is recommended to use wired connections.

### ■ Ethernet Router

A router manages the network, data-routing and supplying of IP addresses. Your router must support the following:

- NAT (Network Address Translation). NAT allows several networked computers to access the Internet simultaneously via a single Internet connection. The AV receiver needs Internet access for Internet radio.
- DHCP (Dynamic Host Configuration Protocol). DHCP supplies IP addresses to the network devices, allowing them to configure themselves automatically.
- A router with a built-in 100Base-TX switch is recommended.

Some routers have a built-in modem, and some Internet Service Providers (ISP) require you to use specific routers. Please consult your ISP or computer dealer if you're unsure.

### ■ CAT5 Ethernet cable

Use a shielded CAT5 Ethernet cable (straight-type) to connect the AV receiver to your home network.

### ■ Internet Access (for Internet radio)

To receive Internet radio, your Ethernet network must have Internet access. A narrowband Internet connection (e.g., 56K modem, ISDN) will not provide satisfactory results, so a broadband connection is strongly recommended (e.g., cable modem, xDSL

modem, etc.). Please consult your ISP or computer dealer if you're unsure.

### Note

- To receive Internet radio with the AV receiver, your broadband Internet connection must be working and able to access the Web. Consult your ISP if you have any problems with your Internet connection.
- The AV receiver uses DHCP to configure its network settings automatically. If you want to configure these settings manually, see "Network" (→ page 66).
- The AV receiver does not support PPPoE settings, so if you have a PPPoE-type Internet connection, you must use a PPPoE-compatible router.
- Depending on your ISP, you may need to specify a proxy server to use Internet radio. If your computer is configured to use a proxy server, use the same settings for the AV receiver (→ page 66).

## Server Requirements

### ■ Server playback

The AV receiver can play digital music files stored on a computer or media server and supports the following technologies:

- Windows Media Player 11
- Windows Media Player 12
- DLNA-certified media server
- The computer or media server must be on the same network as the AV receiver.
- Up to 20,000 folders can be displayed, and folders may be nested up to 16 levels deep.

### Note

- Depending on the media server, the AV receiver may not recognize it, or may not be able to play its music files.

### ■ Remote playback

- Windows Media Player 12
- DLNA-certified (within DLNA Interoperability Guidelines version 1.5) media server or controller device.

The setting varies depending on the media server or controller devices. Refer to your devices' instruction manual for details.

If the operating system of your personal computer is Windows 8/Windows 7, Windows Media Player 12 is already installed. For more information, see the Microsoft web site.

## USB Device Requirements

- USB mass storage device class (but not always guaranteed).
- FAT16 or FAT32 file system format.
- If the storage device has been partitioned, each section will be treated as an independent device.
- Up to 20,000 folders can be displayed, and folders may be nested up to 16 levels deep.
- USB hubs and USB devices with hub functions are not supported.

### Note

- If the media you connect is not supported, the message "**No Storage**" will be displayed.
- If you connect a USB hard disk drive to the AV receiver's **USB** port, we recommend that you use its AC adapter to power it.
- The AV receiver supports USB MP3 players that support the USB Mass Storage Class standard, which allows USB devices to be connected to computers without the need for special drivers or software. Note that not all USB MP3 players support the USB Mass Storage Class standard. Refer to your USB MP3 player's instruction manual for details.
- Protected WMA music files on an MP3 player cannot be played.
- Onkyo accepts no responsibility whatsoever for the loss or damage to data stored on a USB device when that device is used with the AV receiver. We recommend that you back up your important music files beforehand.
- MP3 players containing music files that are managed with special music software are not supported.

- Operation is not guaranteed for all USB devices, which includes the ability to power them.
- Do not connect your USB device via a USB hub. The USB device must be connected directly to the AV receiver's **USB** port.
- If the USB device contains a lot of data, the AV receiver may take a while to read it.
- USB devices with security functions cannot be played.

## Supported Audio File Formats

For server playback and playback from a USB device, the AV receiver supports the following music file formats.

Variable bit-rate (VBR) files are supported. However, playback times may not display correctly.

### Note

- With remote playback, the AV receiver does not support the following music file formats: FLAC, Ogg Vorbis, DSD and Dolby TrueHD.
- In the case of server playback, the above-mentioned file formats may not be played depending on the server type.

### ■ MP3 (.mp3 or .MP3)

- MP3 files must be MPEG-1/MPEG-2 Audio Layer 3 format with sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz and bitrates of between 8 kbps and 320 kbps. Incompatible files cannot be played.

### ■ WMA (.wma or .WMA)

WMA stands for Windows Media Audio and is an audio compression technology developed by Microsoft Corporation. Audio can be encoded in WMA format by using Windows Media® Player.

- WMA files must have the copyright option turned off.
- Sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz, bitrates of between 5 kbps and 320 kbps, and WMA DRM are supported.
- WMA Pro/Voice formats are not supported.

### ■ WMA Lossless (.wma or .WMA)

- Sampling rates of 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz are supported.
- Quantization bit: 16 bit, 24 bit

### ■ WAV (.wav or .WAV)

WAV files contain uncompressed PCM digital audio.

- Sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz, 64 kHz, 88.2 kHz, 96 kHz, 176.4 kHz and 192 kHz are supported.
- Quantization bit: 8 bit, 16 bit, 24 bit

\* For playback from a USB device, sampling rates of 176.4 kHz and 192 kHz are not supported.

### ■ AAC

(.aac/.m4a/.mp4/.3gp/.3g2/.AAC/.M4A/.MP4/.3GP or .3G2)

AAC stands for MPEG-2/MPEG-4 Audio.

- Sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz, 64 kHz, 88.2 kHz, 96 kHz and bitrates of between 8 kbps and 320 kbps are supported.

### ■ FLAC (.flac or .FLAC)

FLAC is a file format for lossless audio data compression.

- Sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz, 64 kHz, 88.2 kHz, 96 kHz, 176.4 kHz and 192 kHz are supported.
- Quantization bit: 8 bit, 16 bit, 24 bit

### ■ Ogg Vorbis (.ogg or .OGG)

- Sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz and bitrates of between 48 kbps and 500 kbps are supported. Incompatible files cannot be played.

### ■ LPCM (Linear PCM)

- Sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz, 64 kHz, 88.2 kHz and 96 kHz are supported.
- Quantization bit: 8 bit, 16 bit, 24 bit
- \* Only for playback via network.

### ■ Apple Lossless (.m4a/.mp4/.M4A/.MP4)

- Sampling rates of 8 kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48 kHz, 64 kHz, 88.2 kHz and 96 kHz are supported.
- Quantization bit: 16 bit, 24 bit

### ■ DSD (.dsf or .DSF)

- The sampling rate of 2.8224 MHz is supported.

### ■ Dolby TrueHD (.vr/.mlp/.VR/.MLP)

- Sampling rates of 48 kHz, 64 kHz, 88.2 kHz, 96 kHz, 176.4 kHz and 192 kHz are supported.
- \* For playback from a USB device, sampling rates only of 48 kHz and 64 kHz are supported.

## About DLNA

The Digital Living Network Alliance is an international, cross-industry collaboration. Members of DLNA develop a concept of wired and wireless interoperable networks where digital content such as photos, music, and videos can be shared through consumer electronics, personal computers, and mobile devices in and beyond the home. The AV receiver complies with the DLNA Interoperability Guidelines version 1.5.

# License and Trademark Information

“x.v.Color” is a trademark of Sony Corporation.



Manufactured under license under U.S. Patent Nos: 5,956,674; 5,974,380; 6,226,616; 6,487,535; 7,212,872; 7,333,929; 7,392,195; 7,272,567 & other U.S. and worldwide patents issued & pending. DTS-HD, the Symbol, & DTS-HD and the Symbol together are registered trademarks & DTS-HD Master Audio is a trademark of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.



Manufactured under license from Dolby Laboratories. Dolby, Pro Logic and the double-D symbol are trademarks of Dolby Laboratories.

Music Optimizer™ and “WRAT” are trademarks of Onkyo Corporation.



“The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.”



InstaPrevue and the InstaPrevue logo are trademarks or registered trademarks of Silicon Image, Inc. in the United States and other countries.

Apple, iPod and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.

Apple TV is a trademark of Apple Inc., registered in the U.S. and other countries.



Manufactured under license from Audyssey Laboratories™, Inc. U.S. and foreign patents pending. Audyssey MultEQ®, Audyssey Dynamic EQ® and Audyssey Dynamic Volume® are registered trademarks of Audyssey Laboratories, Inc.

“DLNA®, the DLNA Logo and DLNA CERTIFIED® are trademarks, service marks, or certification marks of the Digital Living Network Alliance.”

MPEG Layer-3 audio coding technology licensed from Fraunhofer IIS and Thomson.

This product is protected by certain intellectual property rights of Microsoft. Use or distribution of such technology outside of this product is prohibited without a license from Microsoft.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

Qdeo and QuietVideo are trademarks of Marvell or its affiliates.

“Xantech” is a registered trademark of Xantech Corporation.

“Niles” is a registered trademark of Niles Audio Corporation.



“MHL, the MHL Logo, and Mobile High-Definition Link are trademarks or registered trademarks of MHL LLC in the United States and other countries.”



The Wi-Fi CERTIFIED Logo is a certification mark of the Wi-Fi Alliance.

Wi-Fi certified logo shows international association certifying interoperability “Wi-Fi Alliance” ensures the product has passed the test for compatibility with other Wi-Fi certified equipment.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Onkyo is under license. Other trademarks and trade names are those of their respective owners.

Onkyo does not guarantee Bluetooth compatibility between the AV receiver and all Bluetooth-enabled devices. For compatibility between the AV receiver and another device with Bluetooth technology, consult the device’s documentation and dealer. In some countries, there may be restrictions on using Bluetooth devices. Check with your local authorities.

# Specifications

## Amplifier Section

### Rated Output Power

All channels:

**95 watts minimum continuous power per channel, 8 ohm loads, 2 channels driven from 20 Hz to 20 kHz, with a maximum total harmonic distortion of 0.08% (FTC)**

**115 watts minimum continuous power per channel, 6 ohm loads, 2 channels driven at 1 kHz, with a maximum total harmonic distortion of 0.7% (FTC)**  
(North American)

7 ch × 160 W at 6 ohms, 1 kHz, 1 ch driven of 1% (IEC)  
(Australian)

### Maximum Effective Output Power

7 ch × 175 W at 6 ohms, 1 kHz, 1 ch driven (JEITA) (Australian)

### Dynamic Power\*

\* IEC60268-Short-term maximum output power

240 W (3 Ω, Front)  
210 W (4 Ω, Front)  
120 W (8 Ω, Front)

### THD+N (Total Harmonic Distortion+Noise)

0.08% (20 Hz - 20 kHz, half power)

### Damping Factor

60 (Front, 1 kHz, 8 Ω)

### Input Sensitivity and Impedance (Unbalance)

200 mV/47 kΩ (LINE)

2.5 mV/47 kΩ (PHONO MM)

### Rated RCA Output Level and Impedance

200 mV/470 Ω (PRE OUT/LINE OUT)

### Maximum RCA Output Level and Impedance

4.6 V/470 Ω (PRE OUT/LINE OUT)

### Phono Overload

70 mV (MM 1 kHz 0.5% Direct)

### Frequency Response

5 Hz - 100 kHz/+1 dB, -3 dB (Direct mode)

### Tone Control Characteristics

±10 dB, 30 Hz (BASS)

±10 dB, 20 kHz (TREBLE)

### Signal to Noise Ratio

106 dB (LINE, IHF-A)

80 dB (PHONO MM, IHF-A)

### Speaker Impedance

6 Ω - 16 Ω (North American)

4 Ω - 16 Ω (Australian)

## Video Section

### Input Sensitivity/Output Level and Impedance

1 Vp-p/75 Ω (Component Y)  
0.7 Vp-p/75 Ω (Component Pb/Cb,  
Pr/Cr)  
1 Vp-p/75 Ω (Composite)

### Component Video Frequency Response

5 Hz - 100 MHz/+0 dB, -3 dB

## Tuner Section

### FM Tuning Frequency Range

87.5 MHz - 107.9 MHz (North American)  
87.5 MHz - 108.0 MHz, RDS (Australian)

### AM Tuning Frequency Range

522/530 kHz - 1611/1710 kHz

### Preset Channel

40

## Network Section

### Ethernet LAN

10BASE-T/100BASE-TX

### Wireless LAN

#### Compatible standards:

IEEE 802.11 b/g/n standard (Wi-Fi® standard)

### Security:

WEP 64 bit, WEP 128 bit, WPA/WPA2-PSK (AES), WPA/WPA2-PSK (TKIP)

### Transmission frequency

1 - 11 ch (North American)  
1 - 13 ch (Australian)  
(Wi-Fi® standard)

### Radio frequency

2.4 GHz

## Bluetooth Section

### Communication system

Bluetooth Specification version 2.1 + EDR (Enhanced Data Rate)

### Maximum communication range

Line of sight approx. 15 m\*1

### Frequency band

2.4 GHz band (2.4000 GHz - 2.4835 GHz)

### Modulation method

FHSS (Freq Hopping Spread Spectrum)

### Compatible Bluetooth profiles

A2DP 1.2 (Advanced Audio Distribution Profile)  
AVRCP 1.3 (Audio Video Remote Control Profile)

### Supported Codecs

SBC

### Transmission range (A2DP)

20 Hz - 20,000 Hz (Sampling frequency 44.1 kHz)

\*1 The actual range will vary depending on factors such as obstacles between devices, magnetic fields around a microwave oven, static electricity, cordless phone, reception sensitivity, antenna's performance, operating system, software application, etc.

## General

### Power Supply

AC 120 V, 60 Hz (North American)  
AC 220 - 240 V, 50/60 Hz (Australian)

### Power Consumption

6.3 A (North American)  
600 W (Australian)

### No-sound Power Consumption

85 W (North American)  
240 V: 80 W  
230 V: 70 W  
(Australian)

### Stand-by Power Consumption

0.15 W (North American)  
0.2 W (Australian)

### Dimensions (W × H × D)

435 mm × 174.5 mm × 326.5 mm  
17-1/8" × 6-7/8" × 12-7/8"

### Weight

10.1 kg (22.3 lbs.) (North American)  
10.3 kg (22.7 lbs.) (Australian)

## HDMI

### Input

IN 1, IN 2, IN 3, IN 4, IN 5, IN 6

### Output

OUT MAIN, OUT SUB

### Video Resolution

4K

### Audio Format

Dolby TrueHD, DTS-HD Master Audio, DVD-Audio, DSD

### Supported

3D, Audio Return Channel, DeepColor, x.v.Color, LipSync, CEC (RIHD), 4K (up-scaling and Passthrough)

**■ Video Inputs**

Component	IN 1, IN 2
Composite	IN 1, IN 2, IN 3, IN 4, AUX

**■ Video Outputs**

Component	OUT
Composite	MONITOR OUT

**■ Audio Inputs**

Digital	Optical: 1 Coaxial: 2
Analog	BD/DVD, CBL/SAT, GAME, PC, TV/CD, PHONO, AUX

**■ Audio Outputs**

Analog	ZONE2 PRE/LINE OUT
Multichannel Pre Outputs	7 (L, R, C, SL, SR, SBL or FHL, SBR or FHR)
Subwoofer Pre Outputs	2
Speaker Outputs	Main (L, R, C, SL, SR, SBL/FHL, SBR/FHR) + ZONE2 (L, R)
Phones	1 (ø 6.3)

**■ Others**

Setup Mic	1
RI	1
RS232	1
USB	1 (Front)
Ethernet	1
IR Input/Output	2/1
12 V Trigger Out	3

Specifications and features are subject to change  
without notice.

**Memo**

# Integra®

Integra Division of

## **Onkyo U.S.A. Corporation**

18 park Way, Upper Saddle River, N.J. 07458, U.S.A.

Tel: 800-225-1946, 201-818-9200 Fax: 201-785-2650

<http://www.integrahometheater.com>

Integra Division of

## **Onkyo Europe Electronics GmbH**

Liegnitzerstrasse 6, 82194 Groebenzell, GERMANY

Tel: +49-8142-4401-0 Fax: +49-8142-4208-213

<http://www.integra.eu>

Integra Division of

## **Onkyo China PRC**

1301, 555 Tower, No.555 West NanJin Road, Jin an, Shanghai,

China 200041, Tel: 86-21-52131366 Fax: 86-21-52130396

<http://www.integra.com.cn>

Integra Division of

## **Onkyo Corporation**

2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN

Tel: 072-831-8023 Fax: 072-831-8163

<http://www.integraworldwide.com>



Y1303-1

SN 29401456

(C) Copyright 2013 Onkyo Corporation Japan. All rights reserved.



\* 2 9 4 0 1 4 5 6 \*