



SUPERIOR
PERFORMANCE



FINE
PRECISION



AIR FLOW
CONTROL



THERMAL
BARRIER



BAFFLE
FILTERS




QUIET
SYSTEM

Available in 30" and 36" widths and only 11 1/32" high.
This model features professional styling, seamless
welded corner craftsmanship, a powerful 600 CFM blower
with high airflow, heavy duty stainless steel baffle grease
filters, Replaceable LED lighting, plus backlit hidden metallic
in/out knobs for convenience and safety.

It also delivers higher efficiency and easy
maintenance for a cleaner kitchen.

MOUNTING
HEIGHT RANGE


± ±
≥ 24" ≥ 30"

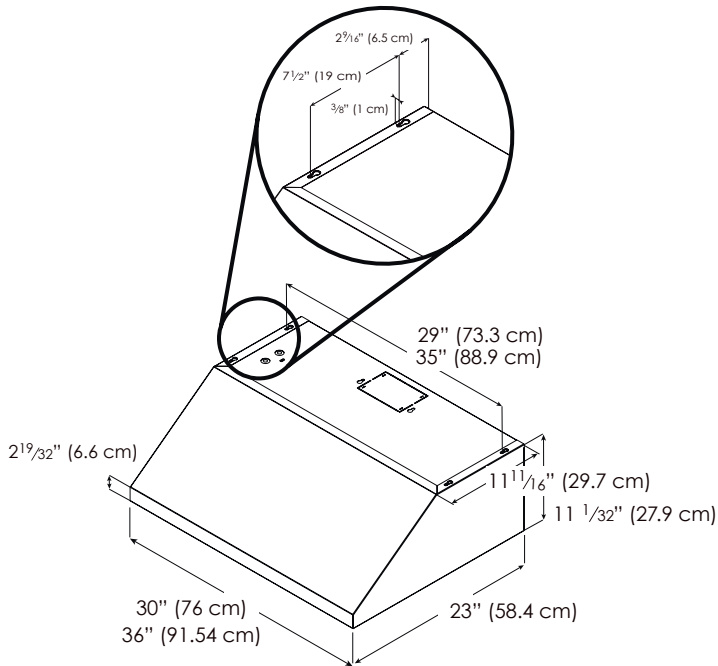



SPECIFICATIONS


Width:	30" Unit	36" Unit
Model:	PUCCM630SS	PUCCM636SS
Dimensions:	30"W x 23"D x 11 1/32"H	36"W x 23"D x 11 1/32"H
Blower Type(internal):**	600 CFM (4 -speed) Min: 2, Max: 7.0 Stainless Steel Fully retractable rotating knobs with white backlighting 2 LED, 7.5 W 3000 Kelvin 540 lumens/lamp Professional stainless steel baffle (2) Rectangular 3" 1/4 x 10" (top and rear) Ducted or Recirculating with Kit 120V - 60 Hz, 457 Watts	
Power (CFM):		
Noise (sones):		
Finish:		
Controls:		
Illumination:		
Grease Filter:		
Duct Transition:		
Installation Type:		
Electrical:		
KITS:		
Long Chimney Extension Kit 6":	ACC02159	ACC02158
Long Chimney Extension Kit 12":	ACC02160	ACC02161
Back Splash Kit:	ACC0142864	ACC0142867
Recirculating Kit:	ACC02770 (contains 2 round carbon filters & cabinet grate)	
WARRANTY:	Two (2) years parts & in-home labor	


FEATURES


- 

QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.
- 

AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.
- 

Grease Collecting Baffle Filters - Intended for high airflow cooking, Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.
- 

Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.
- 

Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.
- 

Superior performance - High performance ventilation with blowers ranging from 600 to 1200 CFM.



Certified Ratings	High Speed	Working Speed	Duct Size
CFM	430	160	3.25 x 10"
Sones	11	2	(Horizontal)
CFM	442	177	3.25 x 10"
Sones	11	2	(Vertical)

* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.