



7 SERIES INTEGRATED 24"W. ALL REFRIGERATOR

Viking 7 Series – VRI/MVRI/FRI

GOOD FOR YOUR FOOD, EVEN BETTER FOR YOUR HEALTH

- **EXCLUSIVE BlueZone™ Fresh Preservation Technology** is a unique, patented air cleaning technology that strips microbes, ethylene gas, hydrocarbons, and odors from the air
 - Significantly extends food shelf life, quality, and flavor
 - Slows ripening, reduces mold, and eliminates odors
 - Commercial technology now for residential use
 - The patented BlueZone blub will last about 12 months which is about 8,000 hours of use and a indicator light will appear when it is time to replace

DESIGN FEATURES

- **Proprietary Fully Articulating Hinge** has three dimensional adjustability for a perfect fit in integrated installations, and the hinge damper allows for smoothness when opening and closing door
- **Capacitive Touch Controls** with intuitive user interface
- **Brilliant Led Lighting** ensures all items are in clear view with bright, energy efficient, ramp-on theater LED lighting from top and sidewalls
- Three separate **crisper drawers** offer dedicated area for produce/meats

THE LATEST IN SPILL CONTROL TECHNOLOGY

- **Spillproof Plus™ Shelves** with Nano technology create an invisible barrier to contain spills
- **Seamless glass shelves** make cleanup easy and maximize usable space
- **3/8" thick tempered glass shelves** provide industry-leading durability

PRO CHILL™ TEMPERATURE MANAGEMENT SYSTEM

- **Variable-Speed High-Efficiency Overdrive™ Compressor** quickly chills food and saves energy
- One of the quietest, most technologically advanced compressors available with electronic controls
- Maintains temperature to within 1°F to keep food fresher longer
- Compressor is now located on the bottom allowing for full integration of the product



VRI

MVRI

FRI

FEATHER TOUCH™ INTERNAL WATER DISPENSER

- Dispenses filtered water with a single touch

ENERGY STAR QUALIFIED

MODEL NUMBERS

- VRI7240W(R/L) – 24"W. All Refrigerator with installed 5/7 Series panel
- MVRI7240W(R/L) – 24"W. All Refrigerator with installed 6 Series panel (SS only)
- FRI7240W(R/L) – 24"W. All Refrigerator accepts wood panel

ACCESSORIES

- RWFDISP – Replacement water filter
- RBZB7VT – BlueZone replacement bulb
- PHK528-SS – Professional Stainless Steel handle (1 piece / 28")
- MHK633-SS – Virtuoso Stainless Steel handle (1 piece / 33")
- MHK633-BG – Virtuoso Black Glass handle (1 piece / 33")

DESIGN OPTIONS

- Order as right or left mounted hinge

COLOR FINISHES

- VRI available in Stainless Steel (SS), Black (BK), White (WH), Apple Red (AR), Burgundy (BU), Cobalt Blue (CB), Graphite Gray (GG) (MVRI Stainless Steel only)



WARRANTY

- 2-year full covers complete unit
- 6-year full – sealed refrigeration system
- 90-day full – cosmetic parts such as glass, painted items, and decorative items
- 12-year limited – sealed refrigeration system




7 SERIES INTEGRATED 24"W. ALL REFRIGERATOR

Viking 7 Series – VRI/MVRI/FRI


24" INTEGRATED ALL REFRIGERATOR		
DESCRIPTION	VRI7240/MVRI7240	FRI7240 (WITH CUSTOM PANELS)
Overall Width	24" (61.0 cm)	
Overall Height (from bottom)	83-15/16" (213.2 cm) min to 84-3/4" (215.7 cm) max	
Overall Depth from rear	To front edge kickplate: 22-1/16" (56.0 cm) To front of door panel: 24-3/4" (62.9 cm)	To front edge kickplate: 22-1/16" (56.0 cm) To front of door panel: 24" (61.0 cm)
	To front of handle endcap: 27-11/16" (70.3 cm)	To front of handle endcap: 27-5/16" (69.4 cm)
Cutout Width	24" (61.0 cm)	
Cutout Height	84" (213.4 cm) min to 85-3/16" (216.3 cm) max	
Cutout Depth	25" (63.5 cm) min.	
Electrical Requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product	
Maximum Amp Usage	9.9 amps	
Inlet Water Requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi	
Overall interior capacity Freezer	12.9 cu. ft. (366.9 liters)	
Approximate Shipping Weight	450 lbs. (202.5 kg)	

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

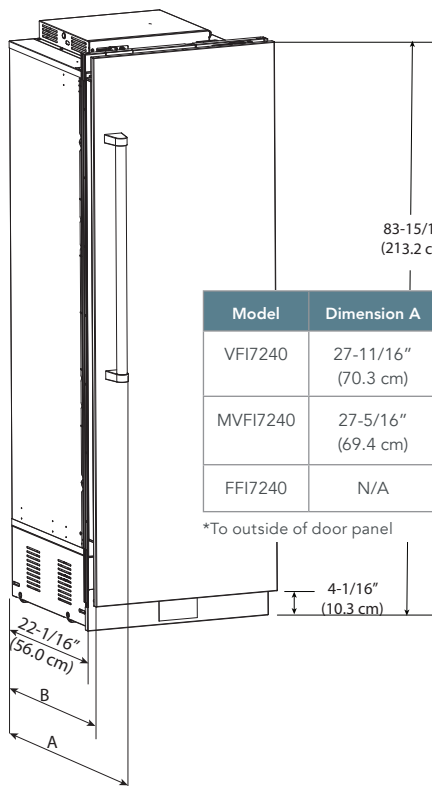

Model	Dimension A	Dimension B*
VFI7240	27-11/16" (70.3 cm)	24-3/4" (62.9 cm)
MVFI7240	27-5/16" (69.4 cm)	24-3/4" (62.9 cm)
FFI7240	N/A	24" (61.0 cm)

*To outside of door panel

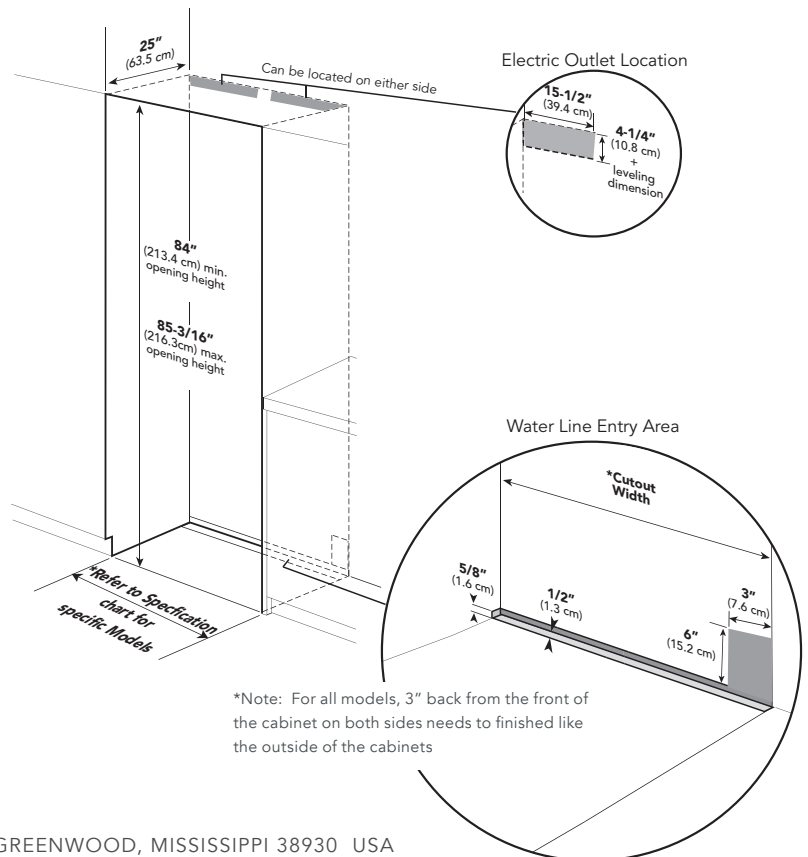

*Note: For all models, 3" back from the front of the cabinet on both sides needs to finished like the outside of the cabinets



VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com
© 2018 Viking Range, LLC All rights reserved. Specifications subject to change without notice.