COREtec®
the Original

Product Specifications

Style Number	VV024
Construction	Waterproof Foamed Core
Edge Profile	Micro Bevel
Nominal Dimensions	7" wide, 48" long

	US Units	Metric Units
Actual Product Width	7.13"	18 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.314"	8 mm
Core Thickness	0.256"	6.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	

Packaging

Area per Box	38.03 sq ft	4 sq m
Pieces per Box	16 pcs	
Weight per Box	63.05 lbs	28.59 kg
Boxes per Pallet	35 boxes	

209 St. Andrew's Oa

Colors

105 Dune	209 St. Andrew's Oa	210 Kingswood Oak	211 Nantucket Oak	703 Waterfront Oak
	Color Variation: Slight	Color Variation: Slight	Color Variation: Slight	Color Variation: Moderate

704 Saginaw Oak	705 Ivory Coast Oak	706 Alabaster Oak	707 Blackstone Oak	708 Hudson Valley O
Color Variation: Slight	Color Variation: Moderate	Color Variation: Substantial	Color Variation: Substantial	Color Variation: Substantial

714 Marsh Oak	715 Fidalgo Oak	716 Midway Oak
Color Variation: Slight	Color Variation: Slight	Color Variation: Slight
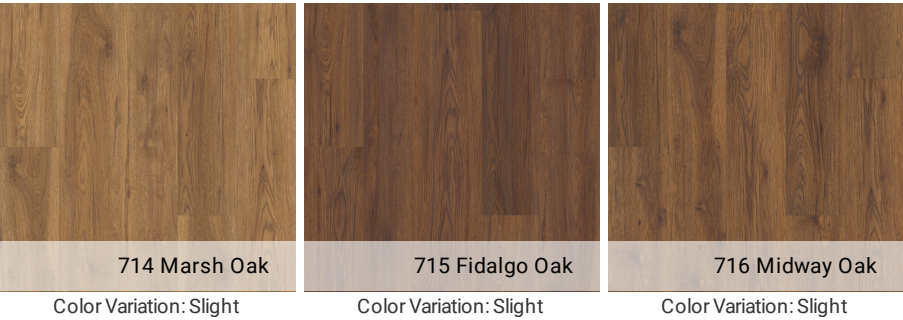
Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

USF Lifetime

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof

Wpc 15 Yr Com Ltd

Com Ub Bond 4100/4151

Certifications

FloorScore Certified

GreenGuard (Certification, Gold, Private Label) Certified