


W5270

Wine Refrigerator

LIEBHERR

Refrigeration and Freezing



home.liebherr.com

W5270

Energy consumption (kWh / y)	114
Sound rating dB(A)	35
Total capacity cu.ft. (l)	13 (368)
Max. No. of Bordeaux bottles (0.75l)	106
Number of wine racks	10
Shelves on telescopic rails	8
Self material	FlexFit (Flexible wooden shelves)
Electronic control	Touch & swipe display
Temperature range °F (°C)	41 to 68°F (5 to 20°C)
Temperature zones	2
Temperature alarm	Yes
Humidity Regulation	HumiditySelect
Interior light	Light panel both sides
Door alarm	Yes
Safety thermostat	Yes - TempProtect Plus
Activated charcoal filter	Yes
Door lock	eDoorLock
Door hinges	Right, reversible
Product dimensions	
in inch (H / W / D)	73 1/16 / 23 1/2 / 26 9/16
in cm (H / W / D)	185.5 / 59.7 / 67.5
Cut out dimensions	
in inch (H / W / D)	74 / 24 / 24
in cm (H / W / D)	188 / 61 / 61
Net weight lbs. (kg)	256.4 (116.3)
Voltage V / Hz	115/60

** Noise output – according to EN 60704-3

Not recommended for installation or use at altitude greater than 4900 feet above sea level.



Accessories

FreshAir charcoal filter	9882460
---------------------------------	---------

Features

2 Zones

Experience wine perfection with 2 independent zones, individually adjustable from 41°F to 68°F, ensuring precise tempering for reds and whites, all in one appliance.

Vibrate Safe

The fully vibration-insulated cooling system allows the wine to mature undisturbed.

UV Protect Plus

Triple protection: three protective layers consisting of tinted glass and a double layer of vacuum-deposited offer unprecedented protection from UV radiation.

Temp Protect Plus

Two sensors constantly measure the temperature in the wine refrigerator. A notification is sent in the event of a critical change.

Humidity Select

The humidity can be adjusted between two levels: Standard or High.

Super Silent

Noise levels are kept to a minimum thanks to virtually silent, speed-controlled, and sound absorbing compressors.

Soft System


SoftSystem integrated into the appliance door, cushions the door closure, thus eliminating slamming, even when the shelves are fully loaded.

Light Column

Two vertical light columns illuminate your wine bottles like the pieces of art they are, every time you open the door, or all the time. The choice is yours – just like the light intensity.

Diagrams

Product Dimensions

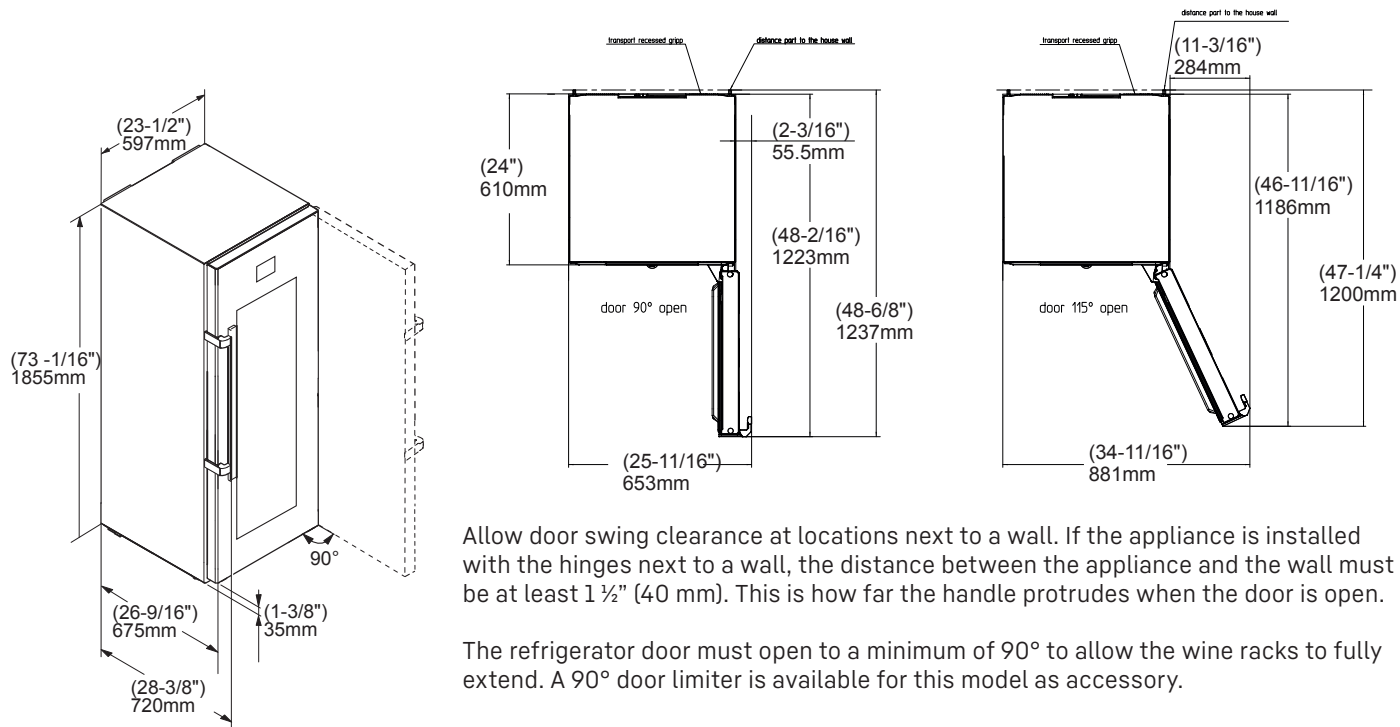


Allow door swing clearance at locations next to a wall. If the appliance is installed with the hinges next to a wall, the distance between the appliance and the wall must be at least 1 ½" (40 mm). This is how far the handle protrudes when the door is open.

The refrigerator door must open to a minimum of 90° to allow the wine racks to fully extend. A 90° door limiter is available for this model as accessory.

Height can be increased by 3/8" (10mm) by turning the levelling feet at the front and the height adjustable rollers at the appliance rear.

Semi built-in look – Cutout Dimensions

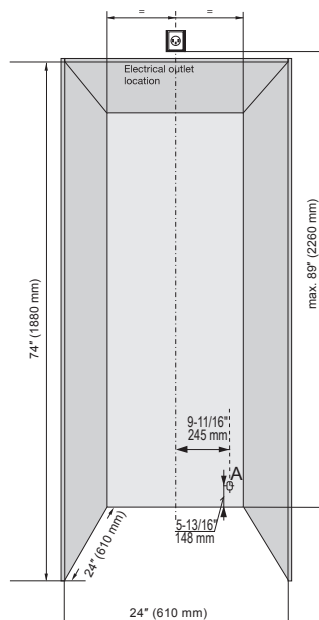

The appliance can be used freestanding or semi built-in. If semi built-in, consider the minimum cabinet opening dimensions specified on this image.

For ventilation requirements, please follow instructions on section Ventilation Requirements in the Freestanding Design Guide.

The power cord exists the rear of the appliance (A) left side and has a length of 6.5 ft (2m). We suggest the electrical outlet not to be located behind the appliance, so it is easily accessible. This can be located on top of the niche like shown on the image or on the side.