FRIGIDAIRE.

FFID2459VS

DISHWASHER

24" BUILT-IN

Height (Min.-Max.)

Depth (Including Door)

Width



AVAILABLE COLORS



MORE EASY-TO-USE FEATURES

33-3/4"-35-3/4"

24-1/4"

Cleans 12 Place Settings

PRODUCT DIMENSIONS

Cleans 12 place settings in one cycle.

ENERGY STAR® Certified

Maximize your energy and dollar savings with ENERGY STAR® Certified Appliances.

Time Saving 24 - Hour Delay Start

Set your dishwasher to run on your schedule. It can be set to run up to 24 hours in advance.

Quiet Operation Won't Run You Out Of The Room

Run your dishwasher while you're in the same room. It runs at 49 DBAs.

Automatically Adjusts Cycles Taking The Guess Work Out Of Cleaning

DishSense™ Technology automatically adjusts the wash cycle based on how much cleaning your dishes need for an effective clean.

Filtration System

Self-cleaning filter eliminates food particles, keeping dishes clean.

CERTIFICATIONS

ENERGY STAR®



NSF® International Certification



SIGNATURE FEATURES

BladeSpray® Arm

Gives you better water coverage for a thorough clean every time.

National Sanitation Foundation® Certified

Sanitize cycle removes 99.9% of common household bacteria.

Clean Dishes of All Sizes

Clean even your largest dishes and cookie sheets with an adjustable upper rack level to fit oversized dishes and kitchen tools of all shapes and sizes.

Remarkable Dry

Dishes come out remarkably dry every time with EvenDry™.



FEATURES


FEATURES	
Control Design	Ready-Select®
Door Latch	Yes
Stay-Put Door Hinge Design	Yes
Low Rinse-Aid Indicator Light	Yes
Interior Color	Stainless Steel
Interior Design	Tall Tub
Wash System	Direct Feed
Wash Levels	5
Wash Speeds	5
Sound Package	UltraQuiet™ I
Filter	Stainless Steel
Filter Trap	Removable
Food Disposer	Hard
dB Level	49
Drying System	Static Vent
CYCLES	
Number of Cycles	5
PowerPlus™ (Heavy)	Yes
Normal	Yes
China / Crystal	Yes
Energy Saver	Yes
Rinse Only	Yes
Cycle Indicator Light	Yes
Control Lock	Yes
OPTIONS	
Heat	Yes
No Heat Dry	Yes
Hi-Temp Wash	Yes
Delay Start	1-24 Hours
RACK SYSTEM	
Rack Design	Standard
Rack Coating	Nylon
Lower Rack -	1191011
SpaceWise® Silverware Basket	Standard
Upper Rack -	Staridara
Rack Type	Standard
CERTIFICATIONS	otanaara -
ENERGY STAR®	Yes
SPECIFICATIONS	
Water Inlet Location	Left Bottom Front
Water Usage (Gallons)	4.0 - 8.0
Water Osage (Galloris) Water Pressure (PSI)	20 - 120
Integral Air Gap on Supply	Yes
	Yes
Leveling Legs Power Supply Connection Location	Right Bottom Front
	120V / 60 Hz / 15A
Voltage Rating	1.44
Connected Load (kW Rating) @ 120 Volts ¹ Amps @ 120 Volts	15.0
Amps @ 120 Volts	13.0

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Shipping Weight (Approx.)

PRODUCT DIMENSIONS

A-Height (Adjustable))	33-3/4" - 35-3/4"
B-Width	23-3/4"
C-Depth (Including Door)	24-1/4"
D - Depth (To Tub Flange)	22-1/2"
Depth with Door Open 90°	50-1/4"
CUTOUT DIMENSIONS	
Height (Min.)	34"
Height (Min.) Height (Max.)	34" 35-3/4"
	- · ·
Height (Max.)	35-3/4"






Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.


Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

83 Lbs.

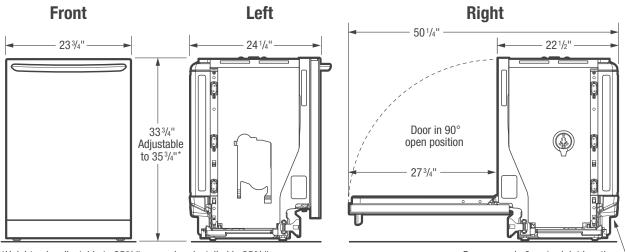

*Height only adjustable to 353/4" max. when installed in 353/4" max. standard cabinetry cutout. (Dimensions do NOT include insulation – insulation blanket may be compressed during installation.)

Power supply & water inlet location (bottom rear)

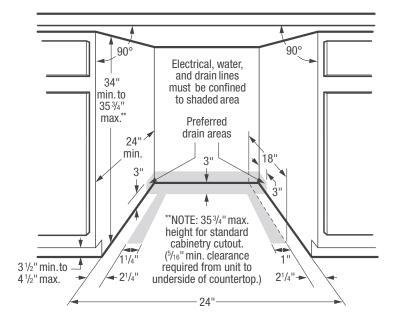

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca