



#### CONSTRUCTION & OPERATION

Built-in Installation	✓
Flush Mount Depth to Kickplate	✓
304 Stainless Steel Interior	✓
Noise Level (dBA)	< 38
Durable Black Aluminum Door Frame	✓
Hettich® Soft Close Zero Clearance Hinge	✓
DOW DELTA-THERM™ High Density HFO Foam Insulation	✓
Custom Copper Evaporator	✓
Embraco® High Efficiency Variable Speed Inverter Compressor	✓
Energy Efficient Frost-Free Operation	✓
Stirling SmoothAir Variable DC Speed Blowers	✓
Stirling TempSync Monitoring System	✓
Door Ajar Chime	✓
Sabbath Mode	✓
Demo Mode	✓

#### INTERIOR FEATURES

High Definition TFT Display & Minimalistic Illuminated Control Panel	✓
Auto Gradual LED Interior Lighting	✓
Hettich® Smooth & Soft Close Full Extension Shelves	3
304 Stainless Steel Shelf Frames	✓
Tall Can Tempered Glass Shelf	✓
Quick-Adjust 304 Stainless Steel Shelf System	✓
Canadian Walnut Shelf Front with Stainless Steel Trim	✓
Refillable High Flow Carbon Filter	1

UPC 809854001849

#### EXTERIOR FIT & FINISH

304 Steel One-Piece Door Frame	✓
Canadian Black Walnut Handle	✓
Reversible Door Swing (Factory Set RH)	✓
Smoked 3-layer Humidity Controlled Ar Insulated Glass Door	✓
2 Layer Low-E UV Protected Glass	✓
Stirling Signature Kickplate & Ventilation Grill	✓
Anti-Tip Bracket	✓

#### TECHNICAL SPECIFICATIONS

Capacity (cu.ft./L)	5.3/150
Beverage Capacity	108+ cans
Energy Consumption (kwh/year)	134
ENERGY STAR/NRCan Certified	✓
Temperature Range	3-20°C
Refrigerant Type	R600a
Certification	CSA

#### PRODUCT DIMENSIONS

W x H x D (mm)	595 x 868 x 604.45
W x H x D (inches)	23 7/16 x 34 3/16 x 23 13/16
Net Weight (kg)	68.8
Net Weight (lbs)	151.6

#### CARTON DIMENSIONS


W x H x D (mm)	673 X 673 X 952.5
W x H x D (inches)	26 1/2 x 26 1/2 x 37 1/2
Gross Weight (kg)	72.3
Gross Weight (lbs)	159.31

- A** 36 cans (12 oz/355ml)
- B** 49 bottles (12 oz/355ml)
- C** 36 cans (16 oz/473ml)
- D** 18 cans (12 oz/355ml)
- E** 6 wine bottles (750ml) or 18 cans


OR

### Cabinet Dimensions



**Note:** With legs fully retracted the minimum overall height is 34 3/16" [868.0mm] from top to bottom. The legs can be extended up to 13/16" [20.0mm] to make the unit taller.

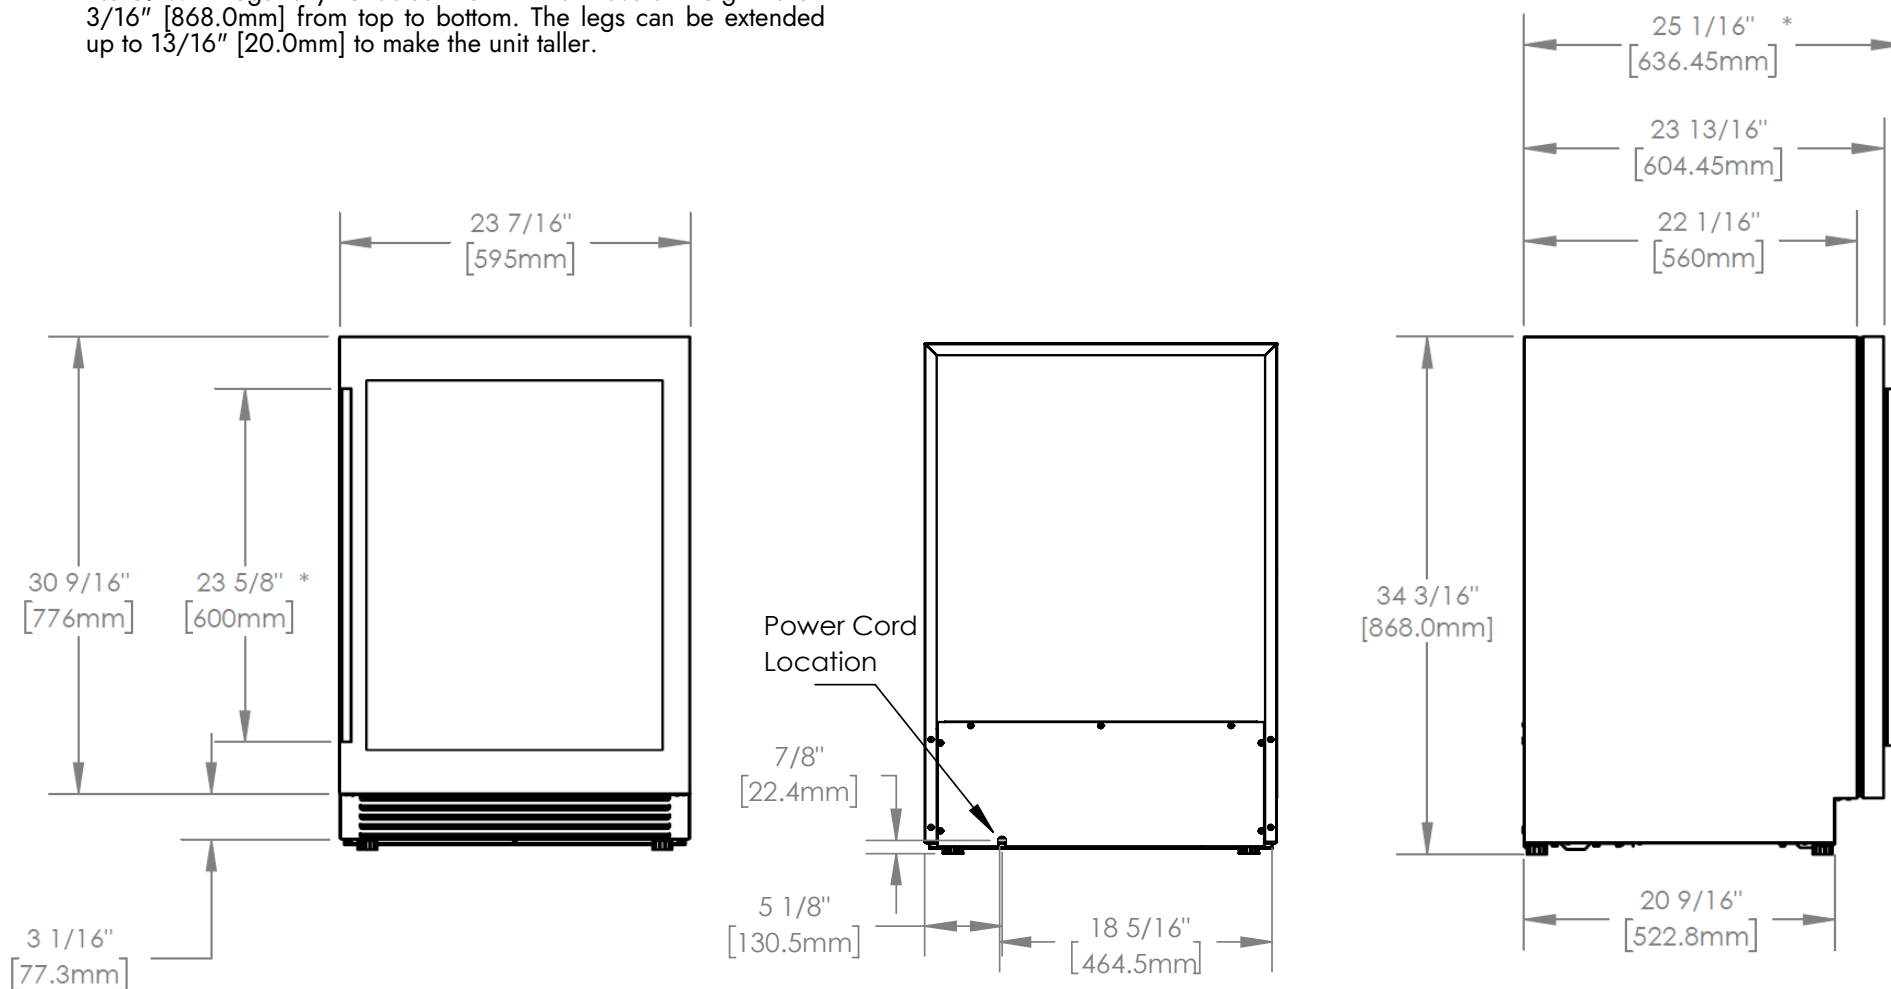


### Open Door Dimensions

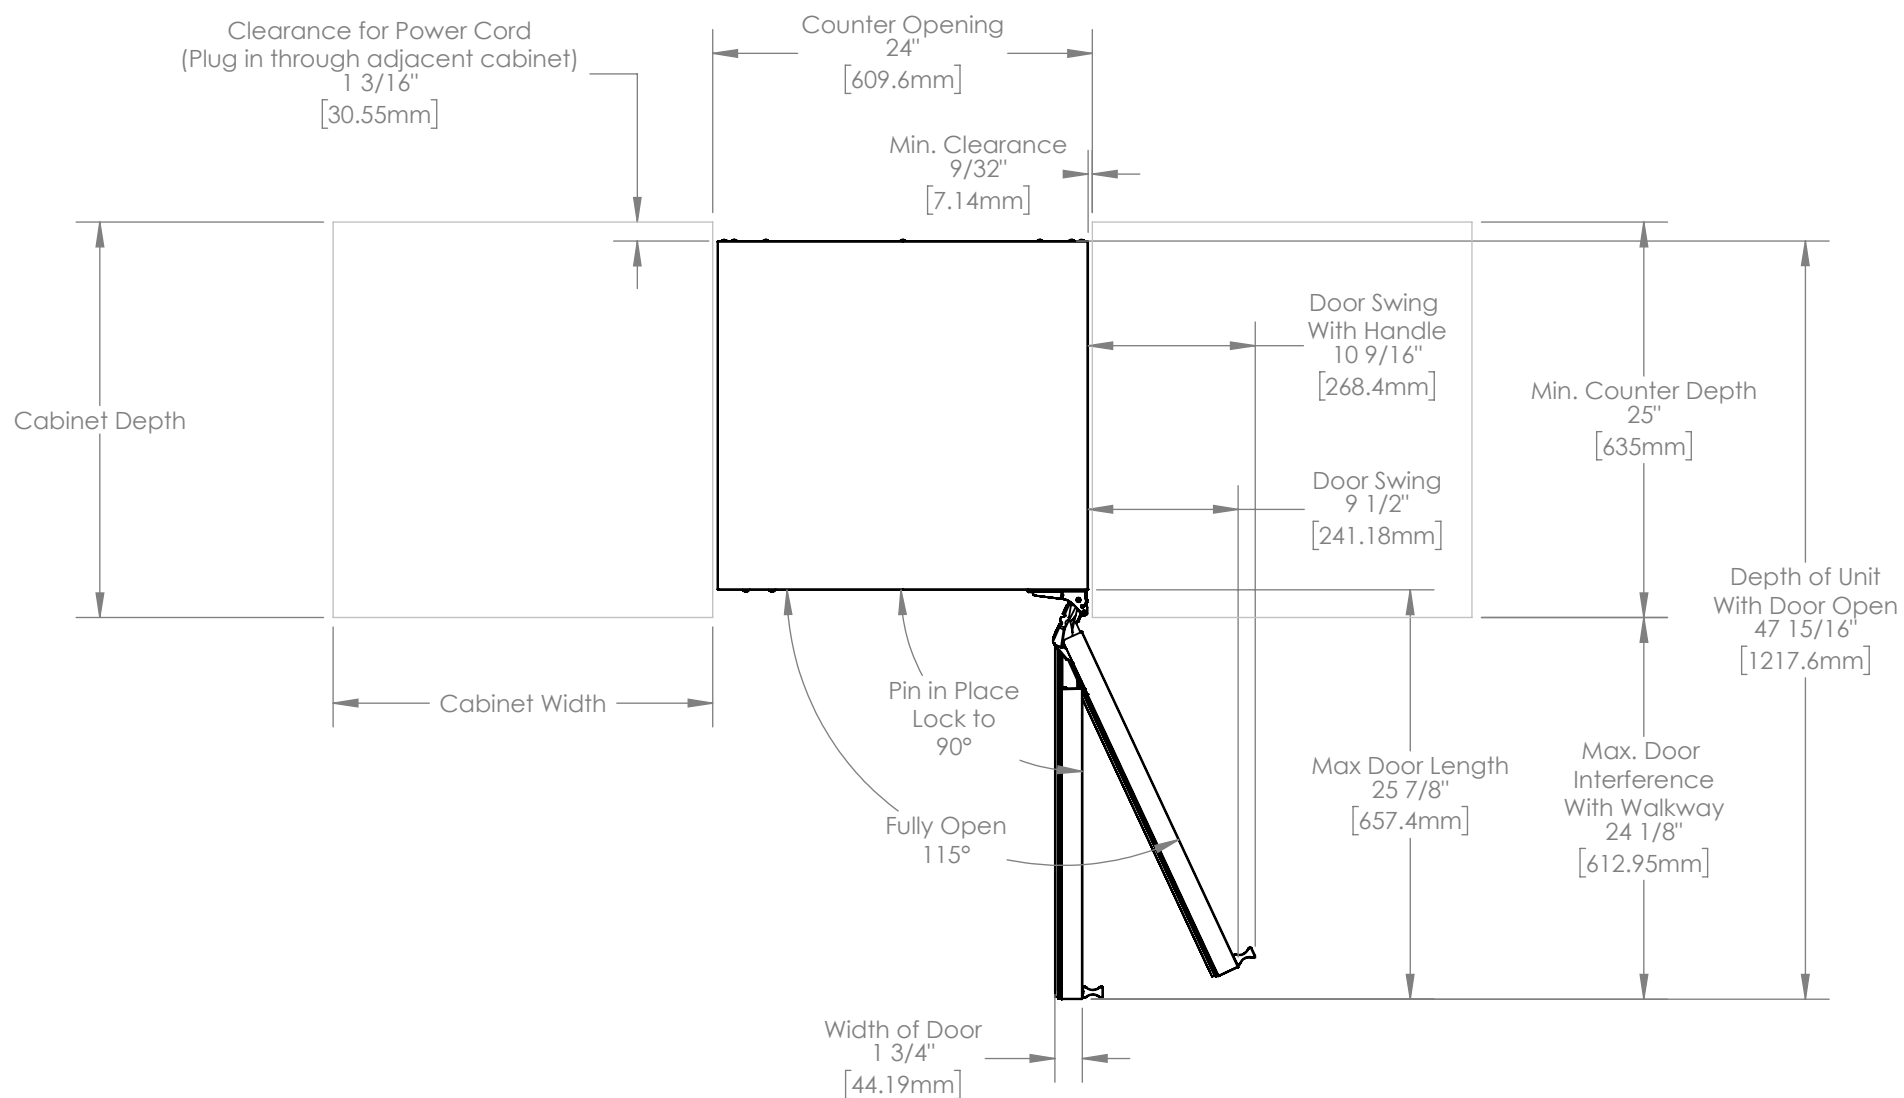

### Electrical Outlet Rough-In Location

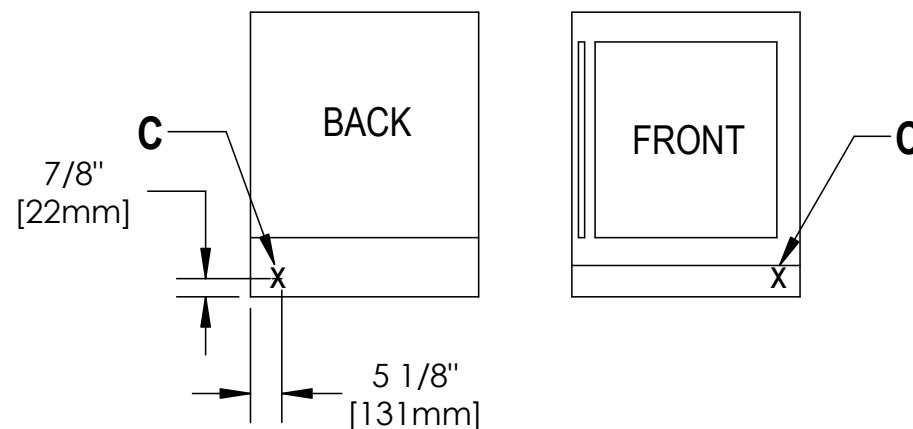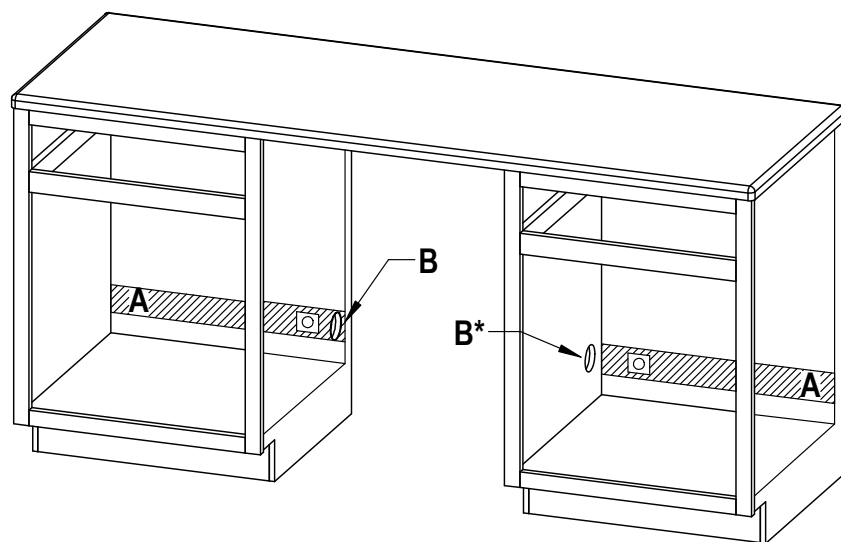

**A: Recommended area for installation connection.**

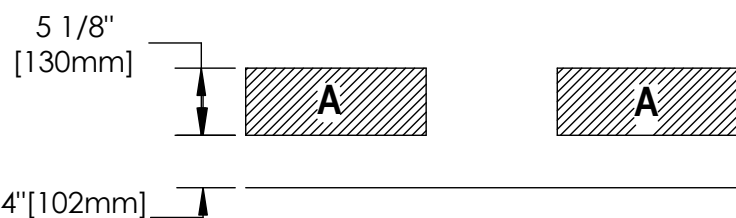

**B: To route power cord to outlet** - a 2 1/2" [63mm] diameter hole through wall of the adjacent cabinet is recommended.

\*The cabinet on the right hand side (when facing the front of the cabinet) is the preferred location to wire through.

**C: Location of power cord is on the back left of the unit**

**For flush installation it is recommended to plug in the power cord beside the unit, not directly behind.**

## Rough-In Dimensions

### *Rough-In Dimensions*

A. Rough-In Width	24" [610mm]
B. Rough-In Height	34 1/2" [877mm] to 35" 1/8" [892mm]
C. Rough-In Depth	25" [635mm]
D. Rough-In Depth to Kickplate	21 3/4" [552mm]
E. Rough-In Kickplate Height	3 1/16" [77mm]

### *Product Dimensions*

F. Width	23 7/16" [595mm]
G. Height	34 3/16" [868mm] to 35" [888mm]
H. Depth	23 13/16" [605mm]
I. Depth to Kickplate	20 9/16" [523mm]
J. Kickplate Height	3 1/16" [77mm]

