Blomberg®
seit 1883

24" 2.3 cu.ft. Compact Front Load Washer, ENERGY STAR®

WM98220SX



ENERGY STAR

Key Features & Benefits

Large Capacity
This Large Capacity Washer lets you clean more in a single load, saving both time and energy while delivering perfect washing results.

Allergen Cycle
The Allergen Cycle utilizes high water temperatures to break down and eliminate allergens like pollen, dust, cigarette smoke, and pet dander, ensuring a cleaner, healthier wash.

Quick Wash
When time is tight and you need your outfit washed in a hurry, Blomberg's Quick Wash Cycle delivers super-fast results for smaller loads—so you can move on without worry.

ENERGY STAR®
Blomberg believes that conscious living should extend to clothing care. That's why we bring intelligent energy and water conservation to the laundry room. All our washers are ENERGY STAR® certified and feature automatic water adjustment for every load, ensuring efficiency and sustainability.

GENERAL PROPERTIES	
Drum Material	Stainless Steel
Style	Front Loading
Capacity	2.3 cu.ft.
Connectivity	WiFi Enabled via HomeWhiz
Stackable	Yes
Matching Dyer	DHP24404W2/DHP24404W3
MAIN FEATURES	
Maximum Spin Speed	1,400 RPM
Variable Spin Speed	Yes
Unbalance Detection System	Yes
Automatic Temperature Control	Yes
Interior Light	No
Leak Protection System	Yes
Automatic Water Adjustment System	Yes
Delay Start Time	0-24 Hours
Time Remaining Indicator	Yes
Dispenser Drawer	Yes
Door Lock Indicator	Yes
Child Lock	Yes
Adjustable Leveling Legs	4
DIMENSIONS	
# of Wash Cycles	15
Normal	Yes
Heavy-Duty/Whites	Yes
Wrinkle Free	Yes
Allergen/Pet Care+	Yes
Dark Wash/Jeans	Yes
Hand-Wash	Yes
Download Cycle	Yes
Quick Wash	Yes
Rinse	Yes
Steam Therapy	Yes
Quick Wash	Yes
AquaIntense	Yes
Fitness Wear	Yes
Tub Clean	Yes
Spin & Drain	Yes
DIMENSIONS	
Product Dimensions (H x W x D)	33 1/4" x 23 5/8" x 23 1/2"
Product Weight (lbs./kg.)	172/78
TECHNICAL DETAILS	
Motor	Optimal Inverter
Voltage	120 V
Frequency	60 Hz
Rated Current Amps	10 Amp
Plug	Wall Receptacle
EFFICIENCY	
ENERGY STAR® Certified	Yes
Annual Energy Consumption (kWh/year)	86

Canada: www.blombergappliances.ca
USA:www.blombergappliances.com

© 2026 Beko US Inc. All Rights Reserved 02.10.26


Blomberg®
seit 1883


Blomberg
seit 1883

24" 2.3 cu.ft. Compact Front Load Washer, ENERGY STAR®


WM98220SX

Dimensions and Installation

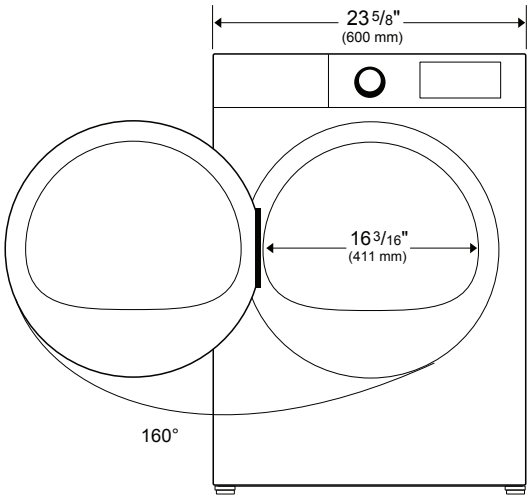

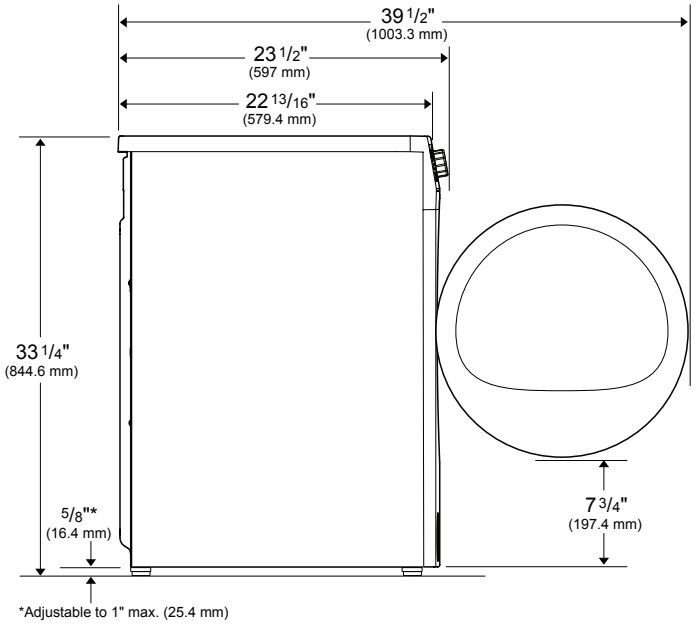


Drainage

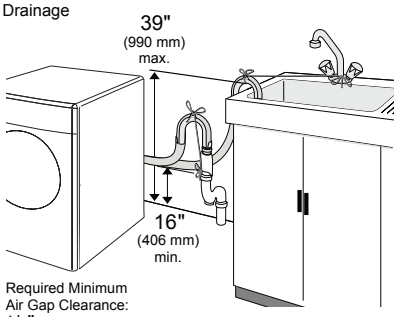

Required Minimum
Air Gap Clearance:
1/2" (13 mm) Top
1/2" (13 mm) Sides
1/2" (13 mm) Back

Water Supply Connection



1 YEAR	2 YEARS
FULL WARRANTY	PARTS WARRANTY

NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc., reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website (Canada) www.blombergappliances.ca / (USA) www.blombergappliances.com to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

Canada: www.blombergappliances.ca
USA:www.blombergappliances.com

© 2026 Beko US Inc. All Rights Reserved 02.10.26

Blomberg
seit 1883


24" 2.3 cu.ft. Compact Front Load Washer, ENERGY STAR®

WM98220SX

Dimensions and Installation

Clearances for Undercounter Installation

Only Washer

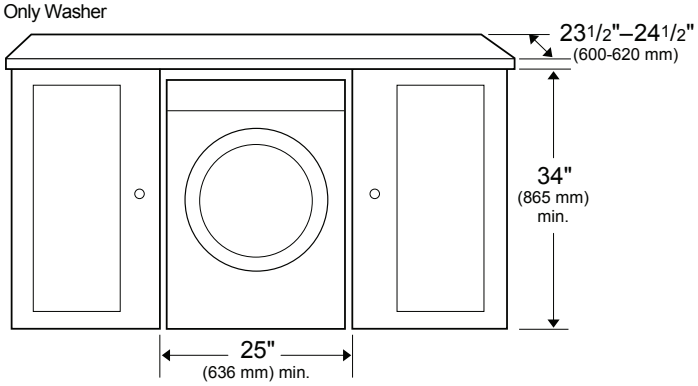


Required Minimum Clearances:
(Stand Alone, Side by Side, or Stacked)

Washer	Vented Dryer	Heat Pump Dryer
Top: 1" (25 mm)	Top: 1" (25 mm)	Top: 1" (25 mm)
Sides: 1/2" (13 mm)	Sides: 3/16" (4 mm)	Sides: 1/2" (13 mm)
Rear: 1/2" (13 mm)	Rear: 4" (101.6 mm)	Rear: 1/2" (13 mm)
Front: xxxxx	Front: 3/16" (5 mm)	Front: 3/16" (5 mm)

Clearances for Undercounter Installation


Both Washer and Vented Dryer

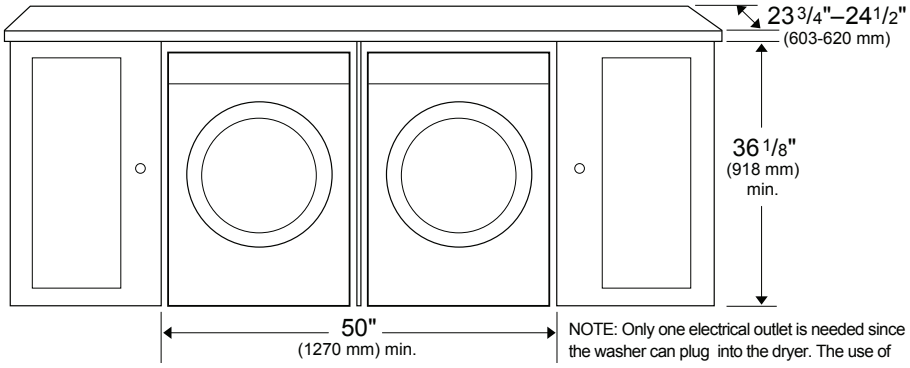

NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of

Clearances for Undercounter Installation

Both Washer and Heat Pump Dryer

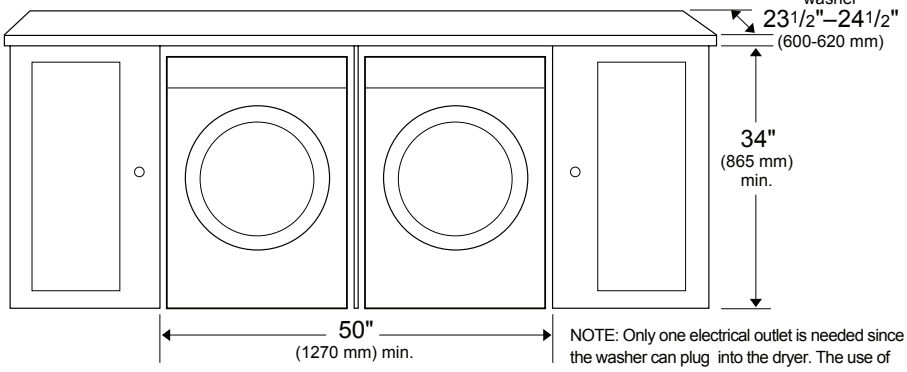

NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of

Closet Door Ventilation Requirement

Washer:
A louver having minimum 23 in2 (148 cm2) air opening located at 3 in (7.62 cm) distance from the bottom of closet door.

Vented Dryer:
A louver having minimum 46 in2 (297 cm2) air opening located at 3 in (7.62 cm) distance from the top of closet door.

Heat Pump Dryer:
Closet door must have 2 openings, one located 3.2 inches (8 cm) from bottom of door having a minimum area of 16 in2 (103 cm2) and the other one located 3 inches (7.5 cm) from top of door having a minimum area of 46 in2 (294 cm2).

© 2026 Beko US Inc. All Rights Reserved 02.10.26


Blomberg
seit 1883

24" 2.3 cu.ft. Compact Front Load Washer, ENERGY STAR®

WM98220SX

Dimensions and Installation

Stacked Installation – Washer and Vented Dryer

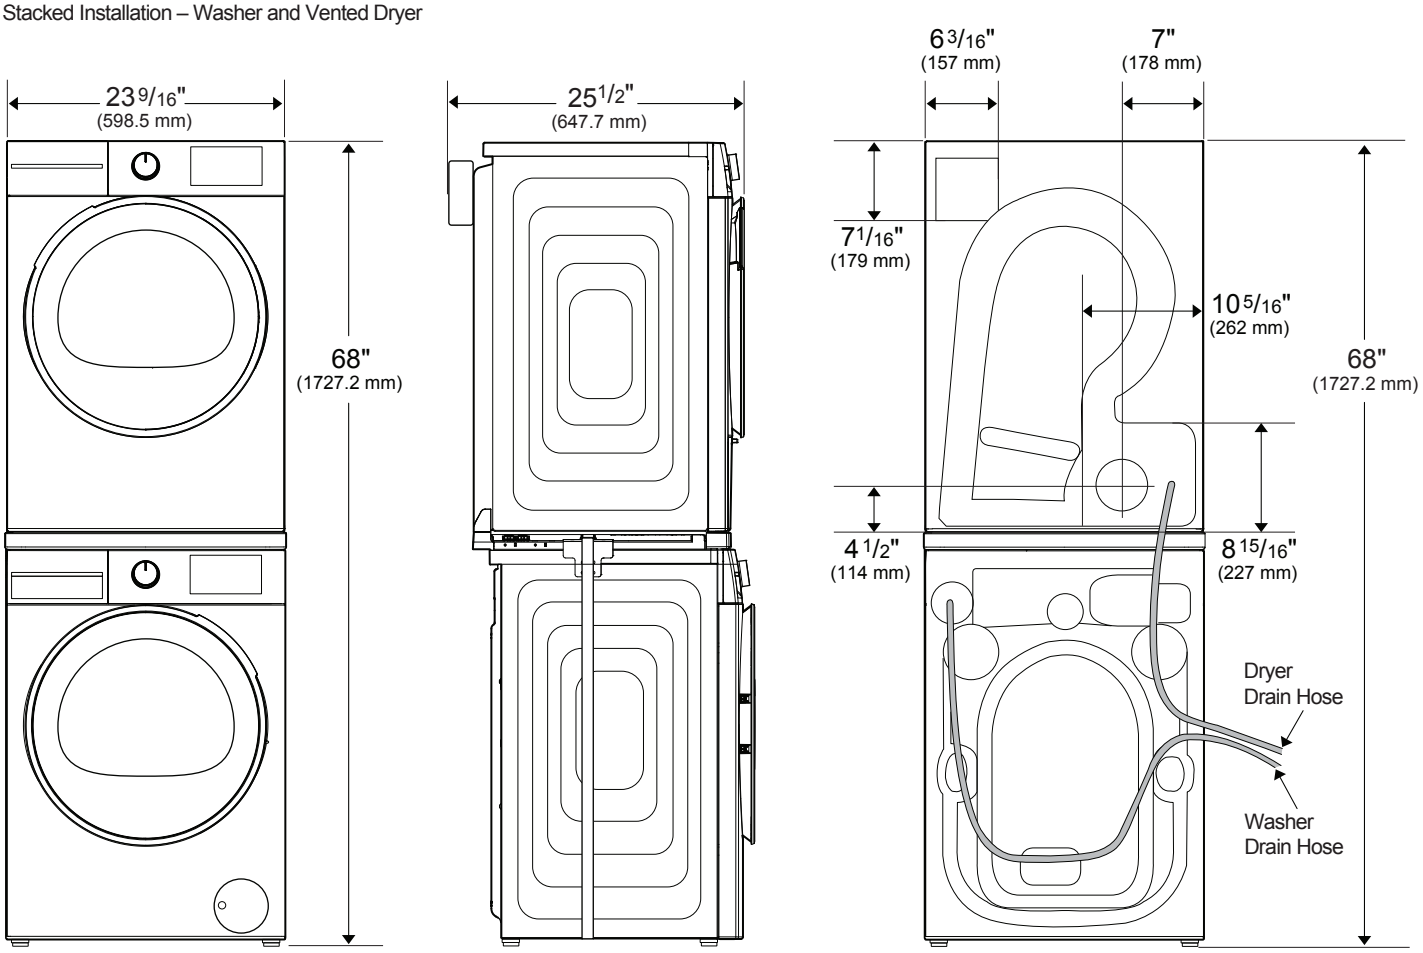

NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.

© 2026 Beko US Inc. All Rights Reserved 02.10.26

Blomberg
seit 1883


Blomberg
seit 1883

24” 2.3 cu.ft. Compact Front Load Washer, ENERGY STAR®


WM98220SX

Dimensions and Installation

Stacked Installation in Closet or Enclosed Space – Washer and Vented Dryer

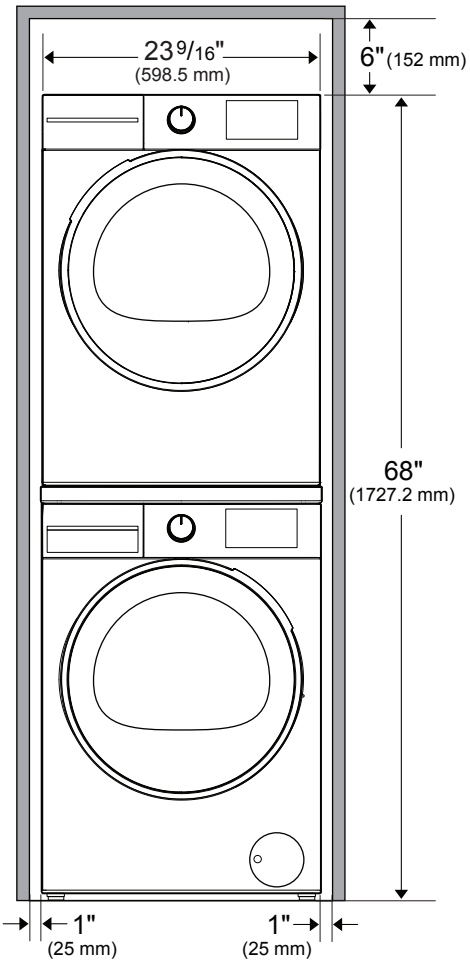


NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.

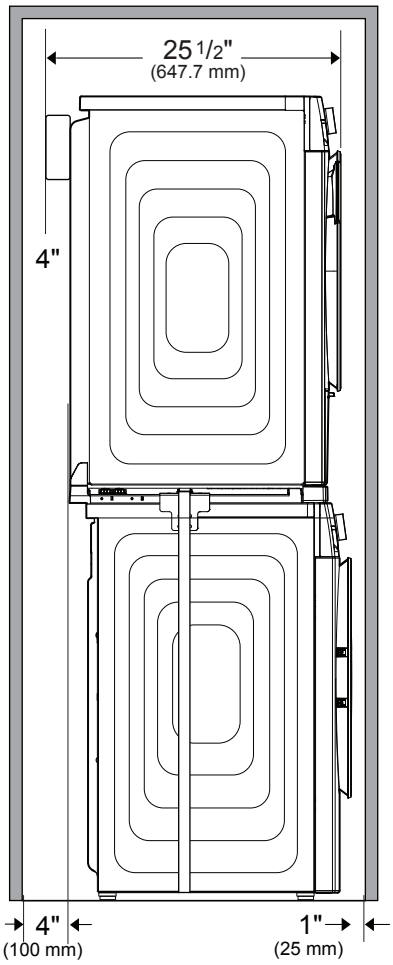

NOTE: The 4" clearance that is required should be measured from the back of the dryer cabinet, NOT from the junction box located at the top rear of the dryer.

NOTE: The 4" clearance is NOT measured from the back of the washer cabinet.

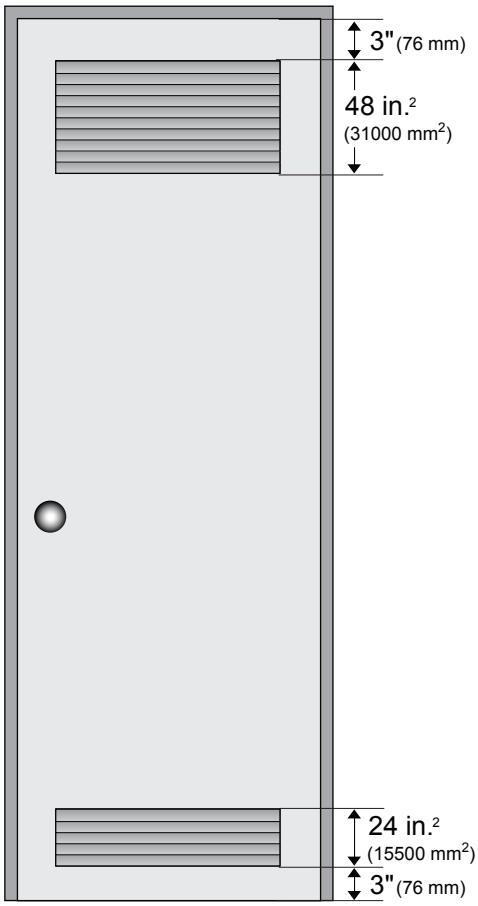

NOTE: The front of the closet must have two unobstructed air openings for a combined minimum total area of 72 sq.in. (465 sq.cm) with a minimum clearance of 3 in. (76 mm) at the top and bottom. A slatted door with equivalent space clearance is acceptable.

© 2026 Beko US Inc. All Rights Reserved 02.10.26

Blomberg
seit 1883