

SKSIR360IS

36-inch Induction Pro Range

SKS



reddot winner 2025

Powerful Center Element

With 7,000 watts of power, the 11-inch dual center element is the most powerful center induction element in the industry*. This element can boil one quart of water in about a minute.

Largest Capacity Steam-Combi Convection Oven

Spacious 6.3 cu. ft. capacity oven combines steam and convection cooking for gourmet results. The convection system cooks food quickly and evenly while steam helps to preserve texture, appearance and taste.

Smart Knobs®

Each burner has a dedicated Smart Knob™ featuring a large, illuminated display that makes it easy to read from across the room. Smart Knobs™ include a Wi-Fi function that let you see if the element is on or off using the ThinQ® app.

Two Flex Cooking Zones

From a small pan to a large griddle, each Flex Cooking Zone combines elements to accommodate different sizes and shapes of cookware. Each zone provides up to 3,700 watts of power.

Cookware Compatibility Indicator

Quickly shows which pots and pans are induction-ready.

Innovation

Wi-Fi Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Monitoring	Yes
Combine Flex Cooking Zones Into One Large Zone	Yes

Cooktop Features

Number of Elements	5 Induction
Cooktop Surface	Black Ceramic Glass, Black Print
Knob Cooktop Controls w/LED Display	Yes
Hot Surface Indicator	Yes
Element Size (inches)	
Front (Left & Right)	8 1/2 x 7 1/8
Rear (Left & Right)	8 1/2 x 7 1/8
Flex Zone (Left & Right)	8 1/2 x 14 3/16
Dual Zone Center	11 / 7
Pan Sensor	Yes
Cookware Compatibility Indicator	Yes

Cooktop Performance

Front (Left & Right) / Boost	1,850 / 3,700 W
Rear (Left & Right) / Boost	1,850 / 3,700 W
Flex Zone (Left & Right) / Boost	3,300 / 3,700 W
Dual Zone Center / Boost	3,700 / 7,000 W

*Among leading brand 36" induction cooktops when pots over 9" are used.

SKSIR360IS

36-inch Induction Pro Range

SKS

Oven Features & Performance

Oven Type	
Steam-Combi Convection Oven	
Oven Capacity (cu. ft.)	6.3
Special Cooking & Steam Modes	
ProHeat® Bake, ProHeat® Convection Bake, ProHeat® Convection Roast, Broil, RapidHeat Roast+, Auto Cook, Steam-Combi, Gourmet Steam, Warm, Proof, My Recipe, Air Fry, Steam Sous Vide	
Convection System	ProHeat®
Convection Element	2,500 W
Convection Conversion	Yes
Broil Element	4,200 W
Bake Element	2,500 W
Steam Element	720 W
Oven Racks	2 Gliding, 1 Heavy Duty
Oven Meat Probe	Yes
Self Cleaning	Yes
Variable Time Self Cleaning (3-4-5 hrs.)	Yes
Speed Cleaning	Yes
Automatic Shut-Off (After 12 hrs.)	Yes
Star-K Certified Sabbath Mode	Yes
Interior Oven Light (Auto & Manual)	Yes

Oven Controls

Touch Oven Controls with LCD Display	Yes
Display	7" TFT LCD
Electronic Clock & Timer	Yes
Control Lock (Oven Functions Only)	Yes
Delay Start Time	Yes
Mood Light	Yes
Preheat Alarm Light	On / Off
Audible Preheat Signal	Yes
Cooking Complete Reminder	Yes (Hi, Lo, Off)
Temperature Display (F or C)	Yes
Language Options	English, Spanish, French

General Features

Stainless Steel Side Panels	Yes
Door Lock	Yes
ENERGY STAR® Certified	Yes

Technical Specs

Energy Source	Electric
Required Power Supply	240 / 208V, 60 Hz, 50 Amp

Dimensions and Weight

Overall Width (inches)	35 7/8
Overall Height (inches)	36 11/16 to 38 1/8
Overall Depth Including Door (inches)	26 3/4
Overall Depth Including Handle (inches)	29 5/16
Net Weight (approx.)	347 lbs.
Shipping Weight (approx.)	383 lbs.

Accessories


Included Accessories	2 Gliding Racks, Heavy Duty Rack, Steam Tray, Broiler Pan, Grid, Meat Probe, Air-Fry Rack
----------------------	--

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
---------------------------------	---------

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

Cutout Dimensions

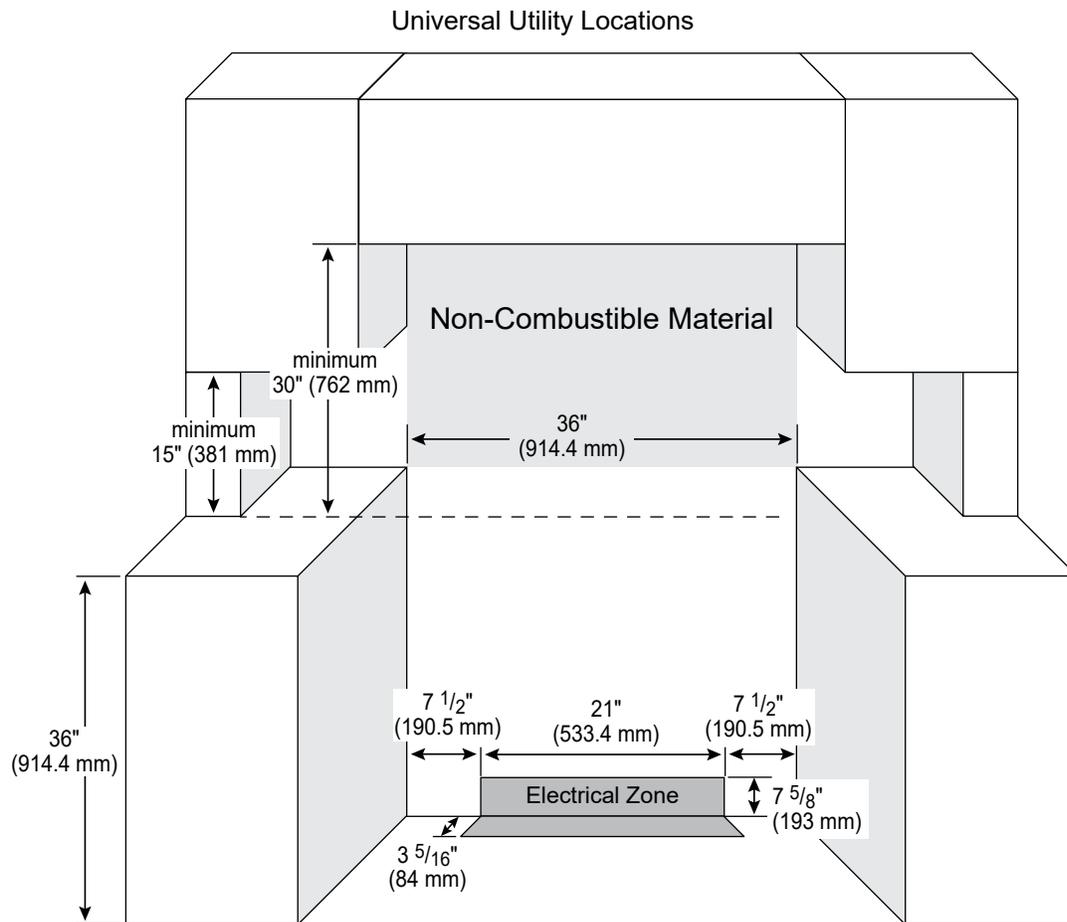

Electrical Specifications

Electric Ranges are designed to be connected to a 240 / 208V, 60Hz., 4-wire, single-phase power supply. An individual properly grounded 50 Amp circuit breaker is required. Electrical hookups must be located on the rear wall/floor as shown.

SKSIR360IS
36-inch Induction Pro Range

SKS

Overall Product Dimensions

