

Pre-finished 24" MasterCool

K 2601 SF

F 2671 SF

KWT 2601 SF / KWT 2611 SF

KWT 2661 SFS



Pre-finished 24" MasterCool

SPECIFICATIONS			
Overall Unit Dimensions	23 ³ / ₄ " (603 mm) W x 83 ³ / ₄ "- 85 ³ / ₁₆ " (2127 - 2164 mm) H x 24" (610 mm) D [Excludes Fascia Dimension]		
Overall Fascia Dimensions	24 ¹ / ₂ " (622 mm) W x 84"- 85 ¹¹ / ₁₆ " (2134 - 2175 mm) H x 1 ¹ / ₂ " (32 mm) D		
Niche			
Minimum Cabinet Niche Opening	24" (610 mm) W* x 84" - 85 ³ / ₁₆ " (2134 - 2164 mm) H x 24" (610 mm) D		
Electrical	K 2601 SF	KWT 26x1 SF(S)	F 2671 SF
Electrical Requirements	110V / 120V, 60Hz, 15 Amps In the case of side-by-side installations, a separate outlet must be used for each appliance.		
Power Cord	NEMA 5-15 plug, 5 ft (1.52 m)		
Plumbing	K 2601 SF	KWT 26x1 SF(S)	F 2671 SF
Water Supply Requirements	-	Connect to a cold water supply only. Do not connect to a low-mineral or a reverse osmosis system. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 29 psi (2 bar) and 116 psi (8 bar). If the pressure is higher than 120 psi (8.3 bar), a pressure reducing valve must be installed.	
Water Connection Line	-	Standard 1/4" O.D flexible water line. The maximum outer diameter of the water pipe (without fittings): 3/8" (10 mm). Water line is not included.	
Shipping	K 2601 SF	KWT 26x1 SF(S)	F 2671 SF
Shipping Weight	398 lbs (180.5 kg)	416 lbs (189 kg)	435 lbs (197 kg)
Shipping Dimensions	26 ⁷ / ₈ " (682 mm) W x 84 ¹ / ₄ " (1,240 mm) H x 29 ⁷ / ₈ " (759 mm) D		
Support			
Call Miele	(800) 999-1360		
Miele Website	~ www.mieleusa.com		
20/20 Link	~ 2020technologies.com		

Please note the following:

- This specification sheet is for a single built-in unit.
- When combining multiple MasterCool units side-by-side, please refer to the Merging Kit specification sheet.

*If design calls for a partition less than 6 ⁵/₁₆" (160 mm) the left unit's cutout will require an additional ¹/₈" (3 mm) to the width to allow installation of the Heating Mat/Merge Kit.



K 2601 SF (Right Hinged)
Item 36260111USA



F 2671 SF (Left Hinged)
Item 37267111USA



KWT 2601 SF (Right Hinged)
Item 36260115USA

KWT 2611 SF (Left Hinged)
Item 36261115USA



KWT 2661 SFS (Right Hinged)
Item 36266115USA



Pre-finished 24" MasterCool

CUTOUT DIMENSIONS

Please note unit's outer SF frame.

Top view:

Niche/Cabinetry

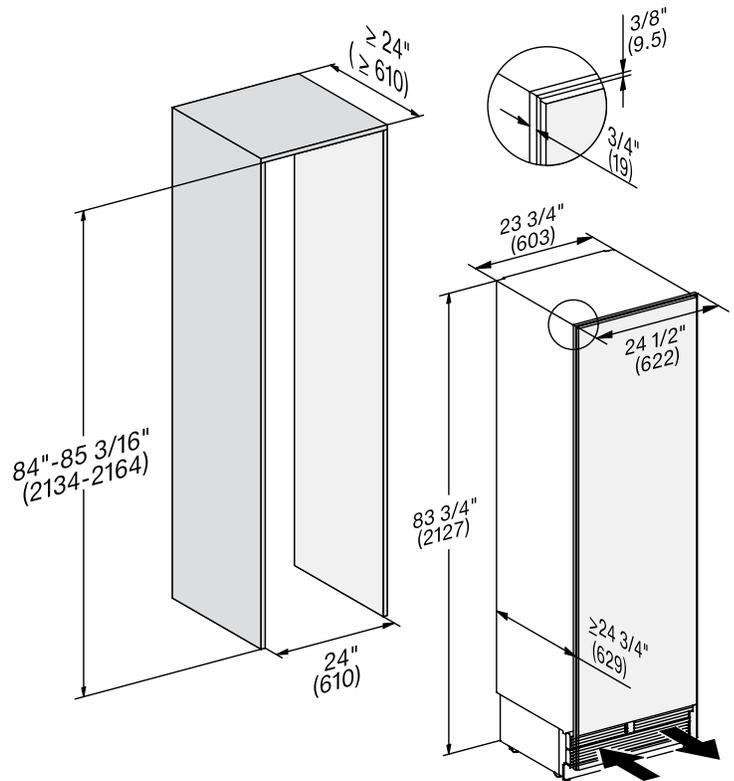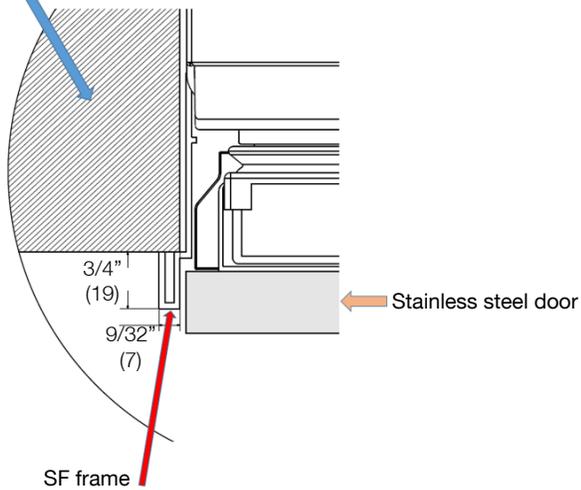


CUTOUT DETAILS

- The electrical connection must not be positioned higher than 9" (228.6 mm) above the floor.
- The 1/4" (6.4 mm) plumbed water connection should not be positioned higher than 2" (50.8 mm) above the floor.

Notes:


In case of an emergency the electrical outlet must be easily accessible and must not be concealed behind the appliance.

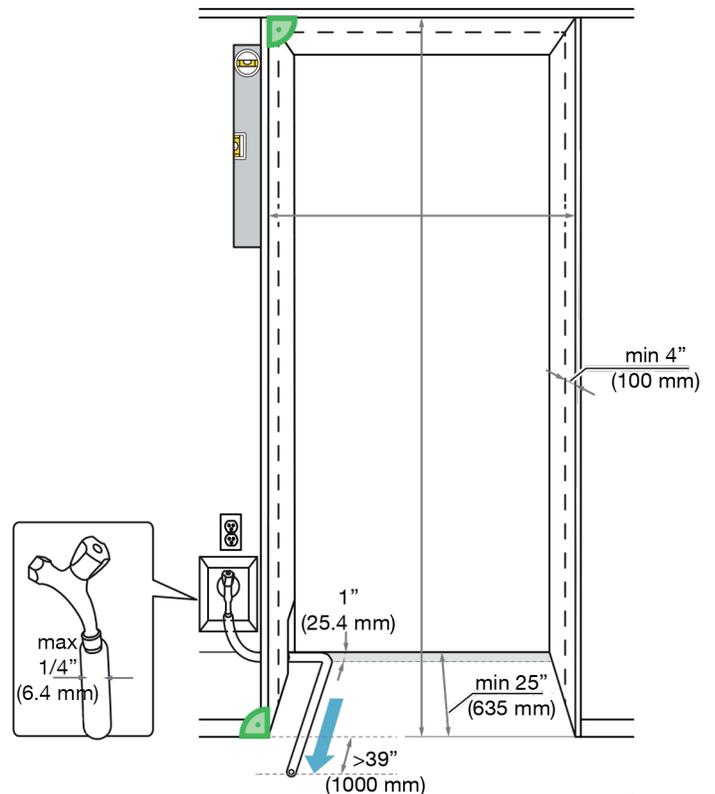

Pre-finished 24" MasterCool


POWER SUPPLY AND WATER CONNECTION (Water Connection For F 2671 SF Only)

Rear View

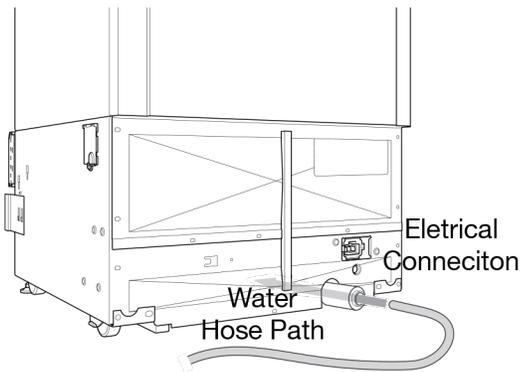


Electrical - 5 foot (1.52 m) - 120 Volt - 15 Amp
- NEMA 5-15 molded plug
Water line - 1/4" flexible water line - not included

Front View

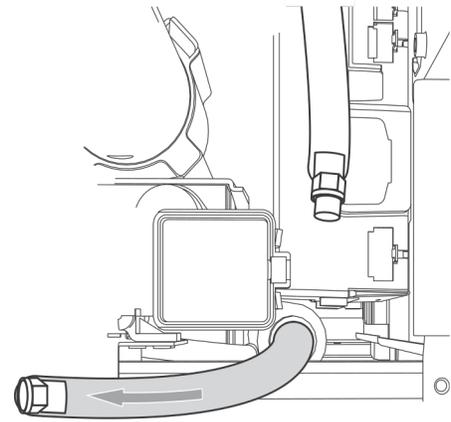

Water connection is located in front of unit.
1/4" compression fitting is needed.

Side View

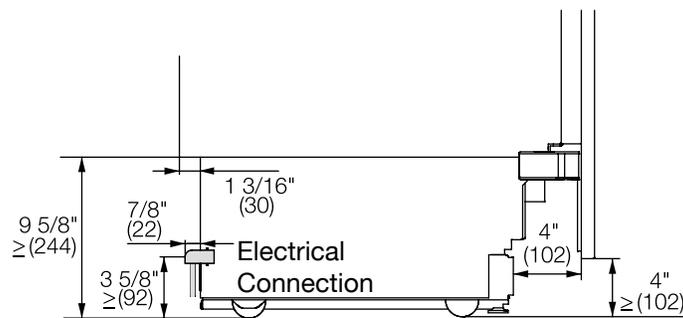


Pre-finished 24" MasterCool


HINGING DETAILS 115° OPENING

Available for the following models:

- K 2601 SF
- F 2671 SF
- KWT 26x1 SF(S)

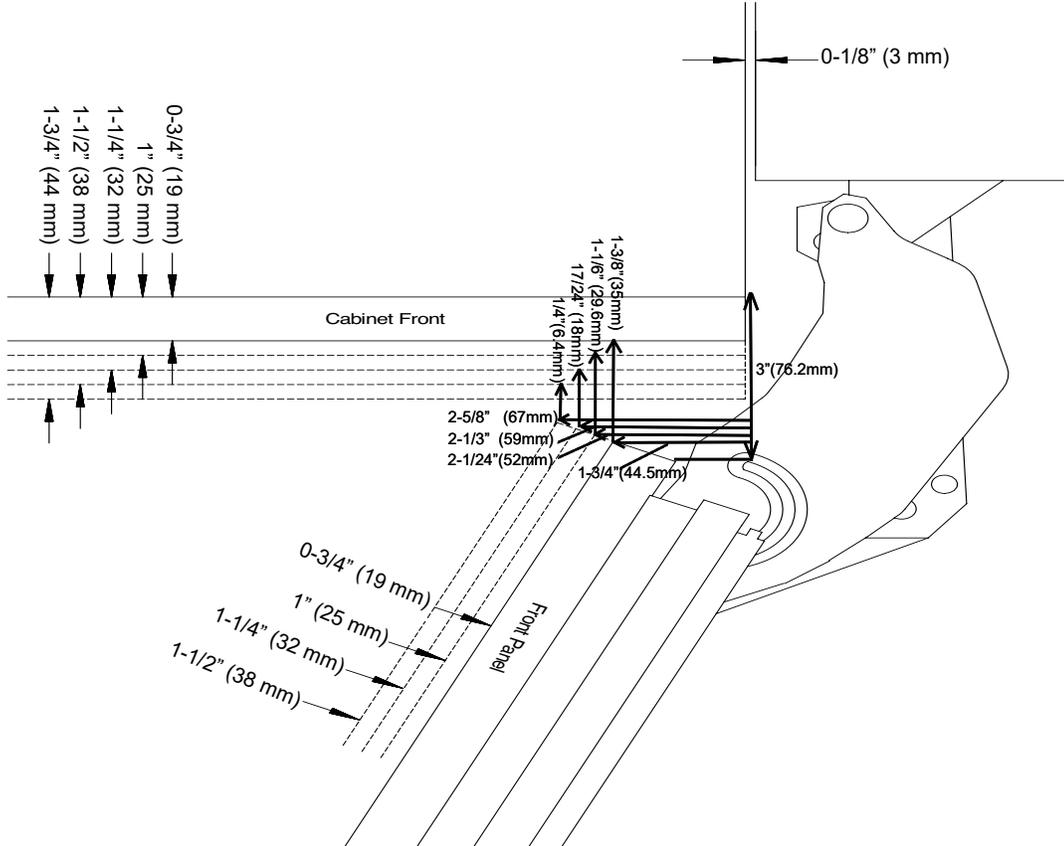

DOOR SWING AT 115° OPENING

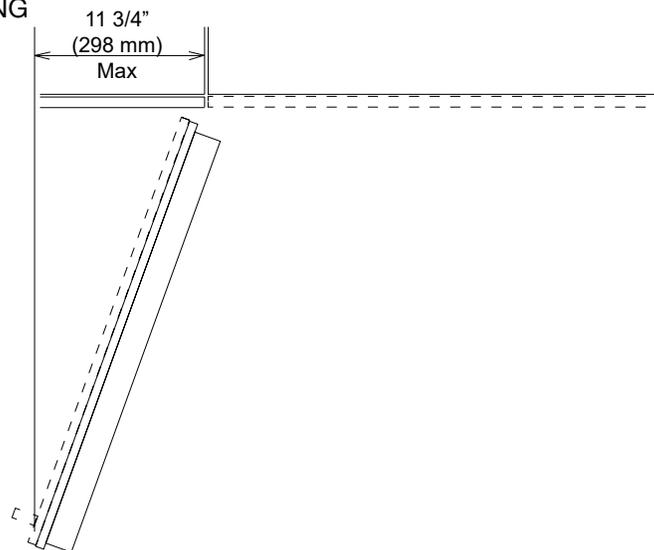


NOTE: Additional space needed depending on thickness of front panels and handle used

Pre-finished 24" MasterCool


HINGING DETAILS 90° OPENING

Available for the following models:

- K 2601 SF
- KWT 26x1 SF(S)

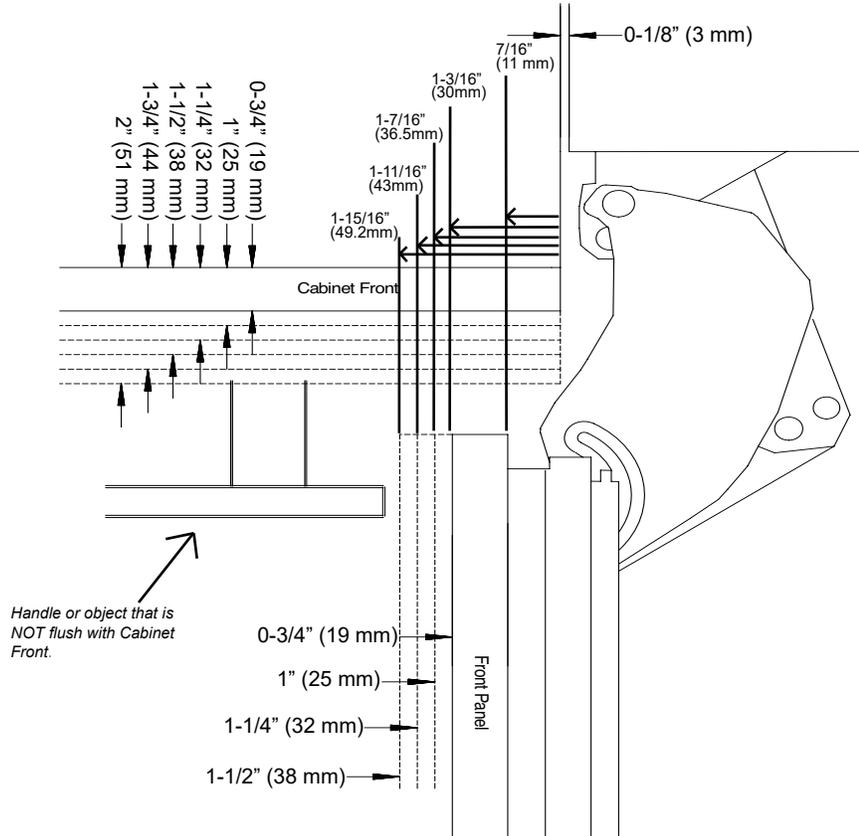

DOOR SWING AT 90° OPENING

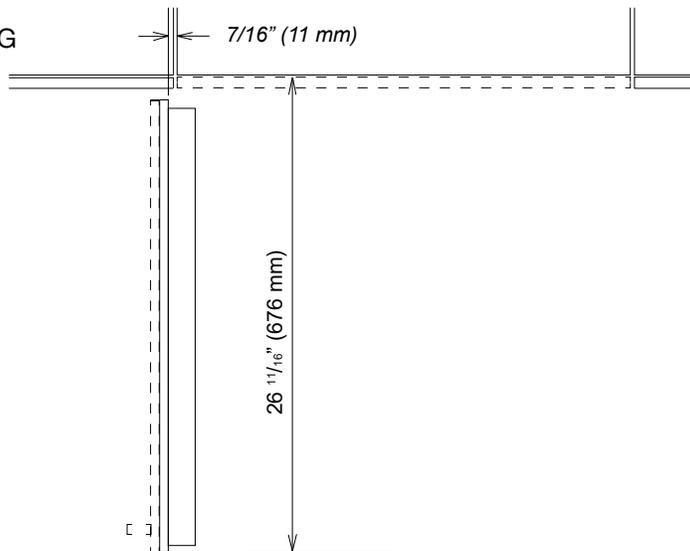

NOTE: Additional space needed depending on thickness of front panels and handle used
When installing hinge side next to an appliance or object that is within range of the door panel, limit the door opening angle to 90°. This is done by installing the banking pin as illustrated. Insert the banking pin through the holes and drive in with a hammer.

Freezer units cannot be stop pinned at 90°