FRIGIDAIRE



7 Cu. Ft. Gas Dryer

Dryer

Available Products: FLVG7000AW

Available Colors: White

Version: 11/26

Product Specifications

Dryer

Air Flow	130 CFM
Drum Material	Aluminized Alloy Steel
Dryness Level Selections	Yes
Heating Element	16000 BTU
Lint Filter	Yes
Moisture Sensor	Yes

Dryer Options

Child Lock	Yes
Wrinkle Care	Yes

Dryness Level

Normal	Yes
More Dry	Yes
Less	Yes

Exterior

Reversible Door	Yes

Electrical Specifications

Minimum Circuit Required	15 Amps
Voltage Rating	120 V

Installation

Power Cord Included	Yes

Safety Certifications and Approvals

CSA Listed	Yes

Dryer Cycles

Cycle Count	8
Air Fluff	Yes
Bulky	Yes
Delicates	Yes
Fast Dry	Yes
Heavy Duty	Yes
Normal	Yes
Permanent Press	Yes
Timed Dry Time	Yes

Drying Temperatures

Low	Yes
Medium	Yes
High	Yes
No Heat	Yes

Controls

Child Lock	Yes
Cycle Status Lights	Yes
Pause Function	Yes
Power On/Off	Yes
Start	Yes

Dimensions and Volume

Height	43 1/10"
Width	27"
Depth	30 1/10"
Depth With Door 90° Open	50"
Dryer Drum Capacity	7 Cu. Ft.
Dry Linen Capacity Tested Amount	10 kg

Energy Data

Combined Energy Factor (CEF)	3.30
kWh/year	641 kWh

General Specifications

Warranty - Labor	1 Year
Warranty - Parts	1 Year

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

7 Cu. Ft. Gas Dryer	5476
Available Products: FLVG7000AW	Available Colors: White
Version: 11/26	

Installation Diagram


Installation in a Recess or Closet

1. A dryer installed in a bedroom, bathroom, recess or closet, MUST be exhausted outdoors.
2. No other fuel burning appliance shall be installed in the same closet as the gas dryer.
3. Your dryer needs the space around it for proper ventilation.


DO NOT install your dryer in a closet with a solid door.


4. Closet door ventilation required: A minimum of 120 square inches (774.2 cm²) of opening, equally divided at the top and bottom of the door, is required. Openings should be located 3 inches (7.6 cm) from bottom and top of door. Openings are required to be unobstructed when a door is installed. A louvered door with equivalent air openings for the full length of the door is acceptable.


MINIMUM INSTALLATION CLEARANCES - Inches (cm)				
	SIDES	REAR	TOP	FRONT
Alcove	1″ (2.5 cm)	6″ (15.2 cm)	24″ (61 cm)	n/a
Closet	1″ (2.5 cm)	6″ (15.2 cm)	24″ (61 cm)	2″ (5.1 cm)

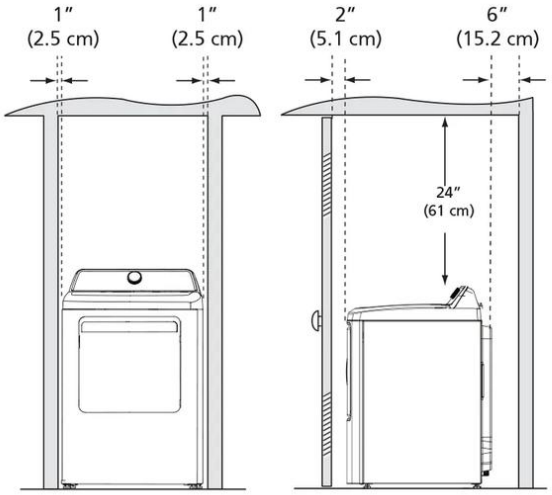

Dryer Dimensions

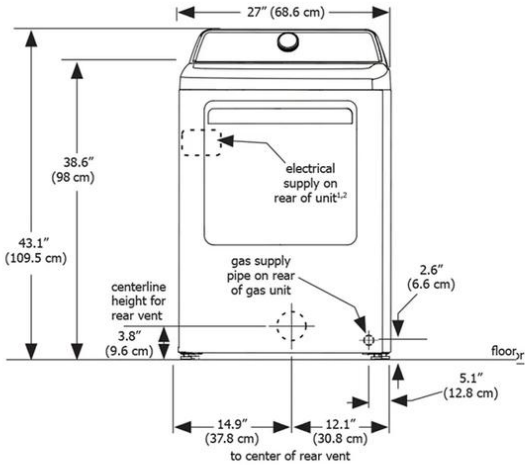

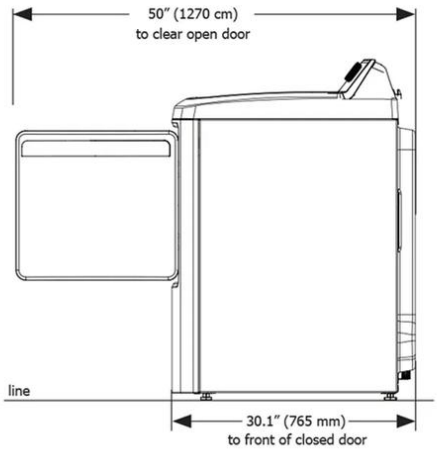

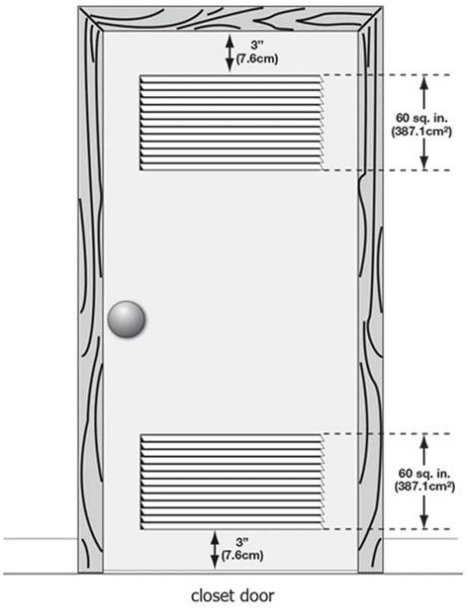

-