



#### Color Variants

VG295114CA

Stainless steel with stainless steel control panel  
Width 36"

#### Optional accessories

WP400001

Wok pan made of multiple-layer material

VG295114CA

200 Series gas cooktop

Stainless steel with stainless steel control panel

Width 36"

Propane gas

Wok burner with 5 KW

- Top appliance in the market, 17 kW on 5 burners
- Solid smooth-surface cast pan supports.
- Electronic flame monitoring (ionization principle) with automatic reignition.

#### Cooking zones

1 three-ring wok burner (300 W – 5000 W), suitable for pots up to max. ø 12 3/5".

2 two-ring high output burners (150 W – 4000 W), suitable for pots up to max. ø 11".

2 two-ring standard burners (150 W – 2000 W), suitable for pots up to max. ø 11".

#### Operation

Integrated control panel with cooking zone and power marking.

One-handed operation.

Gas valve with fine control.

#### Features

Three-part pan support with flat, continuous pot surface.  
Brass burner rings.

#### Safety

Electronic flame monitoring with automatic re-ignition.

Automatic quick ignition.

#### Planning notes

Special nozzles can be ordered as spare parts.

The appliance is not operable without electrical connection.

Panel thickness 5/8" - 1".

Air intake from above.

No intermediate shelf required.

The rear panel must consist of a non-flammable material. Wall trims must be resistant to heat.

Installation in a 36" wide lower cabinet is required.

A Gaggenau oven can be installed below the cooktop.

Appliance must be fixed from underneath.

A minimum lateral clearance of at least 12" from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

Clamping range 1 13/16" - 2" cooktop fixings.

A ventilation hood must be switched on during operation of the gas cooktop.

Distance between ventilation hood and gas cooktop at least 30".

Appliance weight: approx. 29 kg.

#### Rating

Total rating gas : 32,000 BTU

Connecting cable 55" with plug.

#### Product Features

Knob Material

Full metal

Sealed Burners

No

Burners with booster

Type of grate

Natural Gas Connection Rating (BTU)  
58000

LP Gas Connection Rating (BTU)

Dimension of 1st heating element (in)  
11 "

Power of 1st heating element (W)

0.15-4

Power of 1st burner (BTU)

13600

Dimension of 2nd heating element (in)

11 "

Power of 2nd heating element (W)

0.15-2

Power of 2nd burner (BTU)

6800

Dimension of 3rd heating element (in)

Power of 3rd heating element (W)

0.3-5

Power of 3rd burner (BTU)

17000

Dimension of 4th heating element (in)

Power of 4th heating element (W)

0.15-4

Power of 4th burner (BTU)

13600

#### Consumption and connection features

UPC code

825225883586

Variant color

Stainless steel

Energy source

Gas

Gas type

Liquid gas 27,5 mbar (USA)

Alternative gas type

Watts (W)

25

Current (A)

10

Volts (V)

110-240

Frequency (Hz)

50-60

Approval certificates

AGA, CGA, CSA

Power cord length (in)

55 "

Power cord length (cm)

140.0

Plug type

120V-3 prong

Required cutout size (HxWxD) (in)

5 1/8 " x 34 13/16 " x 19 5/16 "

Required cutout size (HxWxD) (mm)

130 x 885 x 490

Minimum distance from counter front (in)

Minimum distance from rear wall (in)

Overall appliance dimensions (HxWxD) (in)

+5 1/8 " x 36 " x 20 1/16 "

Overall appliance dimensions (HxWxD) (mm)

138.5 x 914 x 510

Product packaging dimensions

(HxWxD) (in)

11.33 x 14.76 x 39.21

Net weight (lbs)

64

Net weight (kg)

29.000

Gross weight (lbs)

71

Gross weight (kg)

32.000


Total number of cooktop burners

5

2013-07-03

Page 1

2013-07-03  
Page 2

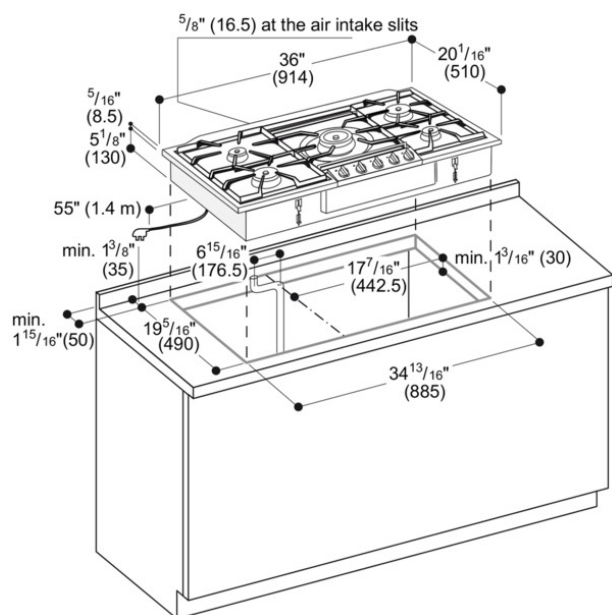

## Gas connection

