

SIGNATURE SERIES SOTTILE 18" DEPTH BEVERAGE CENTER

HH24BS-3 INDOOR MODEL

HH24BO-3 OUTDOOR MODEL



Glass Door Model



Solid Door Model

GENERAL SIGNATURE SERIES SOTTILE FEATURES



- 32" height including leveling legs
- **Industry Exclusive** 18" depth for design flexibility
- Plug recessed for true 18" depth
- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- **Industry Exclusive** full extension refrigerator and wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Adjustable Crisp White and Cool Blue LED lighting
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- State-of-the-art digital control module
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HH24BS/BO FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes two (2) full-extension wine shelves and one (1) full-extension refrigerator shelf
- Wine shelves feature stainless steel fronts
- Shelves are soft-coat vinyl dipped to gently cradle bottles and protect them from vibration transfer
- Product capacity is 10 wine bottles (750 ml.) and 41 cans (12 oz.)
- Beverage Center temperature 33°- 48°F

ACCESSORIES

(L)	Factory Installed Lock
67992-L/R	Stacking Kit for HH24 models
67115-24	Wood Faces for Wine Shelves (7/pk)
67360	6" Toe Kick and Riser

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com/residential

PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	32" (813 mm.)
Product Depth	18" (457 mm.)
Opening Width	24" (610 mm.)
Opening Height	32-1/4" (819 mm.)
Opening Depth	18" (457 mm.)
Refrigerated Volume	3.1 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	283 kWh/yr
Shipping Weight	185 lbs (83.91 kg.)

INDOOR MODELS


HH24BS-3-1L*	Stainless steel solid door, hinge left
HH24BS-3-2L*†	Panel ready solid door, hinge left
HH24BS-3-3L*	Stainless steel glass door, hinge left
HH24BS-3-4L*†	Panel ready glass door, hinge left

OUTDOOR MODELS

HH24BO-3-1L*	Stainless steel solid door, hinge left
HH24BO-3-2L*†	Panel ready solid door, hinge left
HH24BO-3-3L*	Stainless steel glass door, hinge left
HH24BO-3-4L*†	Panel ready glass door, hinge left

* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

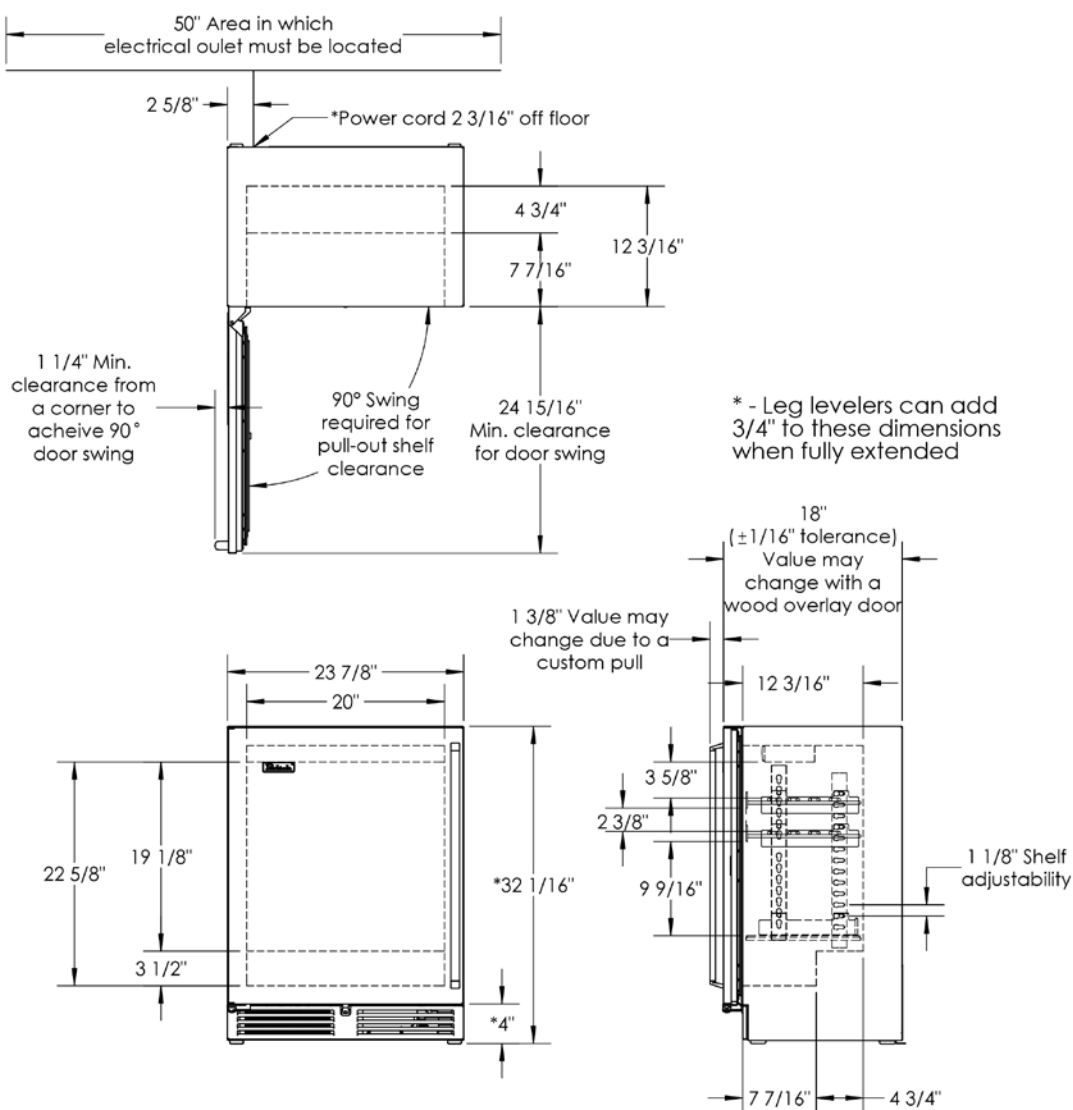

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

FORM NO. Z2521
REV. A-09/07/2018