

30" PROFESSIONAL OVENS AND COMPANIONS

PLANNING GUIDE

SERIES 9 & 11

SELF-CLEANING OVEN | OB30SPPUX3

SELF-CLEANING STEAM ASSIST OVEN | OB30SPPSUX3

COMBI-STEAM | OS30SPUX3

COMPACT COMBI-STEAM | OS30NPUX3

COMPACT CONVECTION-SPEED | OM30NPUX3

BUILT-IN COFFEE MAKER | EB30PSX1

WARMING DRAWER | WB30SPEX3, WB30SDEI3

VACUUM DRAWER | VB30SPEX3, VB30SDEI3

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONCEPT DESIGN	PAGE
DESIGN CHOICE	
Styles	4
Professional Family	5
Overview	6
Configuration Options	7
Cabinetry Alignment	8
SPECIFICATION GUIDE	
Self-Cleaning Oven	10
Self-Cleaning Steam Assist Oven	11
Combi-Steam Oven	12
Built-In Coffee Maker	13
Compact Combi-Steam Oven	14
Compact Convection-Speed Oven	15
Warming Drawer	16
Integrated Warming Drawer	17
Vacuum Seal Drawer	18
Integrated Vacuum Seal Drawer	19
Dimensions - Ovens	20
Dimensions - Compact Ovens & Built-In Coffee Maker	21
Dimensions - Drawers	22
Services	23

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

DEVELOPED AND DETAILED DESIGN	PAGE
DATA SHEETS	
Self-Cleaning Oven	25
Self-Cleaning Steam Assist Oven	26
Combi-Steam Oven	27
Built-In Coffee Maker	28
Compact Combi-Steam Oven	29
Compact Convection-Speed Oven	30
Warming Drawer	31
Integrated Warming Drawer	32
Vacuum Seal Drawer	33
Integrated Vacuum Seal Drawer	34

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

DEVELOPED AND DETAILED DESIGN	PAGE
PLANNING CONSIDERATIONS	
Cabinetry Preparation	36
Clearances	37
Ventilation	38
Stack Height	39
Self-Cleaning Oven	40
Self-Cleaning Steam Assist Oven	41
Combi-Steam Oven	42
Built-in Coffee Maker	43
Built-in Coffee Maker & Compact Combi-Steam Oven	44
Compact Combi-Steam Oven	45
Compact Convection-Speed Oven	46
Warming Drawer	47
Integrated Warming Drawer	48
Vacuum Seal Drawer	49
Integrated Vacuum Seal Drawer	50
SERVICES	
Power Cord Length and Location - Ovens	52
Power Cord Length and Location - Compact Ovens	53
Power Cord Length and Location - Companions	54

DESIGN CHOICE



MINIMAL STYLE - HANDLELESS

MINIMAL STYLE

CONTEMPORARY STYLE

PROFESSIONAL STYLE

Celebrating a singular aesthetic to blend seamlessly into the kitchen, Minimal style ovens feature subtle textural and tonal contrasts for a sense of refinement and purity.

Defined by clean lines and timeless design cues, Contemporary style ovens bring a sense of balance and refinement. A versatile aesthetic that complements a range of kitchen styles.

Distinctive and bold, Professional style ovens are the perfect interpretation of the commercial kitchen for the home chef. Experience refined performance with stainless steel construction that is built to last.

This Planning Guide is for the Professional Style featuring 30" Ovens and Companions. For information on other styles, please visit the Fisher and Paykel website. To see what models are available, head to the 'Overview' section in this Planning Guide.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

FINISH

Stainless Steel

OVENS

SELF-CLEANING

SELF-CLEANING STEAM ASSIST

STEAM

SPEED

+

**

*

*

COMPANIONS

COFFEE MAKER

WARMING DRAWERS VACUUM SEAL DRAWERS

INSTALLATION OPTIONS

Installation in wall

Installation under-bench

*Integrated model, panel ready for a custom front panel.

**Built-In Coffee Maker measurements are different to other products. Configurations are possible, but consider installation requirements.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)





















FISHER & PAYKEL

90004607B

PLANNING GUIDE 30" OVENS AND COMPANIONS VERSION B - OCTOBER 2025

© FISHER & PAYKEL APPLIANCES LIMITED 2025

PAGE 5

FRONT ELEVATION								
								
*Integrated models available.								
	SELF-CLEANING OVEN	SELF-CLEANING STEAM ASSIST OVEN	COMBI-STEAM OVEN	BUILT-IN COFFEE MAKER	COMPACT COMBI- STEAM OVEN	COMPACT CONVECTION- SPEED OVEN	WARMING DRAWER	VACUUM SEAL DRAWER
Series	Series 9	Series 11	Series 11	Series 9	Series 9	Series 9	Series 9	Series 9
Models	OB30SPPUX3	OB30SPPSUX3	OS30SPUX3	EB30PSX1**	OS30NPUX3	OM30NPUX3	WB30SPEX3	VB30SPEX3
Integrated Models	-	-	-	-	-	-	WB30SDEI3	VB30SDEI3
Interface	6.8" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	4.3" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	-	-
Overall Height	28 11/16" (729mm)	28 11/16" (729mm)	23 9/16" (598mm)	18 1/2" (470mm)	18" (458mm)	18" (458mm)	10 11/16" (271mm)	10 11/16" (271mm)
Overall Width	29 7/8" (758mm)	29 7/8" (758mm)	29 7/8" (758mm)	29 13/16" (757mm)	29 7/8" (758mm)	29 7/8" (758mm)	29 7/8" (758mm)	29 7/8" (758mm)
Front Panel Thickness*	15/16" (24mm)	15/16" (24mm)	15/16" (24mm)	1 9/16" (40mm)	15/16" (24mm)	15/16" (24mm)	15/16" (24mm)	15/16" (24mm)

*Flush, Semi-Flush, and Proud alignment is achievable. Head to the 'Cabinetry Alignment' section of this Planning Guide.

**Built-In Coffee Maker measurements are different to other products. Configurations are possible, but consider installation requirements.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

CONSIDERATIONS

Different configurations possible, consider heights for grid and row installations.

STACK HEIGHT


Stack Height is overall product height with minimum clearance above appliance front panel to upper cabinetry front panel or appliance.

BUILT-IN COFFEE MAKER


Built-In Coffee Maker measurements are different to other products. Configurations are possible, but consider installation options.

STACKED INSTALLATION

Stack Height
52 3/8" (1331mm)




Stack Height
57 9/16" (1462mm)




GRID INSTALLATION


Stack Height
46 7/8" (1191mm)



Stack Height
28 3/4" (731mm)




Stack Height
28 3/4" (731mm)



ROW INSTALLATION

Stack Height
28 3/4" (731mm)

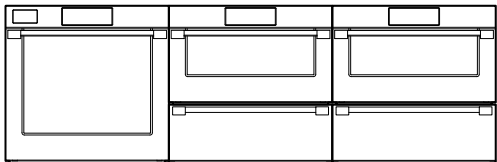


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PROFESSIONAL STYLE - CABINETRY ALIGNMENT


Professional Ovens and Companions have a control panel thickness of 15/16" (24mm), allowing for Flush, Semi-Flush, and Proud alignment. The drawing below illustrates 3/4" (19mm) cabinetry front panels. Built-In Coffee Maker has a control panel thickness of 1 9/16" (40mm).

CONTROL PANEL

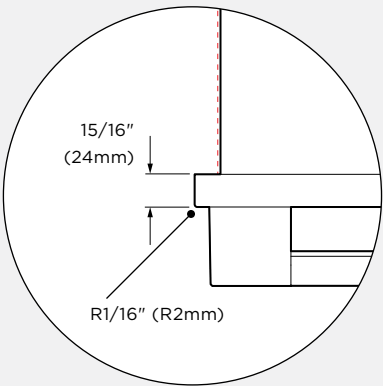


PLAN VIEW

FLUSH CABINETRY ALIGNMENT

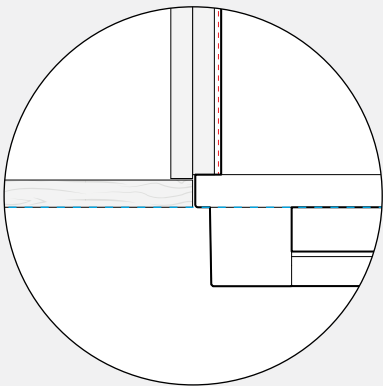


PLAN VIEW

SEMI-FLUSH ALIGNMENT

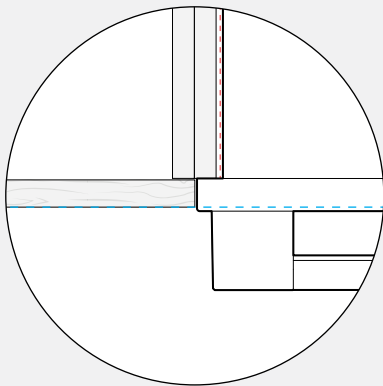

PLAN VIEW

PROUD ALIGNMENT

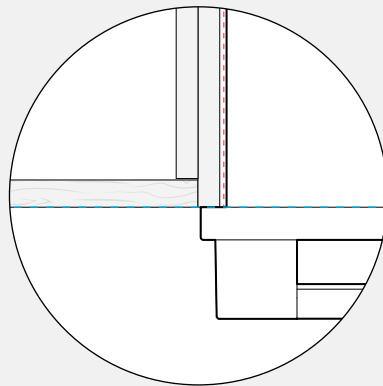

PLAN VIEW

----- INDICATES CABINETRY DATUM

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATION GUIDE

SERIES 11 & 9



OVERVIEW

Designed to make a bold statement in the kitchen space with a striking handle and brushed stainless steel finish, this oven matches seamlessly with our Professional style family of appliances. Pyrolytic self-cleaning simplifies maintenance, while precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OB30SPPUX3
30" Series 9 Professional Self-Cleaning Oven

SERIES & STYLE

Series 9
Professional

FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space. Matches with Professional style family of appliances
- ② Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ③ Premium soft-close door with advanced thermal performance
- ④ Generous 4.6 cu ft useable capacity
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Twin vertical fans, perfect for multi-shelf cooking
- ⑧ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑨ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray
- ④ Roasting Dish
- ⑤ Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to make a bold statement in the kitchen space with a striking handle and brushed stainless steel finish, this oven matches seamlessly with our Professional style family of appliances. Steam Assist enhances convection cooking, while pyrolytic cleaning simplifies maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OB30SPPSUX3
30" Series 11 Professional Self-Cleaning Steam Assist Oven

SERIES & STYLE

Series 11
Professional

ACCESSORIES

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray
- ④ Roasting Dish
- ⑤ Wired Temperature Sensor
- ⑥ Descale Solution - 2 sachets (Part 580925)

FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space. Matches with Professional style family of appliances
- ② Steam Assist combines convection heat with steam to enhance the cooking process
- ③ Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ④ Premium soft-close door with advanced thermal performance
- ⑤ Generous 4.6 cu ft useable capacity
- ⑥ Large 6.8" touchscreen is intuitive and easy to use
- ⑦ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑧ Twin vertical fans, perfect for multi-shelf cooking
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)



OVERVIEW

Designed to make a bold statement in the kitchen space with a striking handle and brushed stainless steel finish, this Combi-Steam oven matches seamlessly with our Professional style family of appliances. Featuring a larger cavity ideal for cooking larger dishes and multiple trays simultaneously. With versatile cooking options including steam or convection, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OS30SPUX3
30" Series 11 Professional Combi-Steam Oven

SERIES & STYLE

Series 11
Professional

ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf (x2)
- ③ Step Down Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack
- ⑥ Smokeless Broil Tray

FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Premium soft open and close door
- ④ Generous 2.5 cu ft useable capacity with six shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ⑦ Large Perforated Steam Dish
- ⑧ Small Perforated Steam Dish
- ⑨ Large Steam Dish
- ⑩ Wired Temperature Sensor
- ⑪ Descale Solution - 2 sachets (Part 580925)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to complement our Professional style oven and warming drawer, this Built-in Coffee Maker seamlessly integrates into any kitchen design with a stylish stainless steel finish. Beautiful to use, it has an intuitive touch display with 13 different beverage options to suit individual taste and selection – from Espresso to Latte. Pair with other companion products to create a kitchen suite for every need.

PRODUCTS

EB30PSX1
30" Series 9 Professional Built-in Coffee Maker

SERIES & STYLE

Series 9
Professional

FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space. Matches with Professional style family of appliances
- ② Intuitive touch display brews a perfect cup of coffee at the touch of a button
- ③ Programmable timer turns on the Coffee Maker at the ideal time each day
- ④ Personalised coffee and smart self-learning menu preferences with 13 functions to suit any taste
- ⑤ Allows you to prepare hot milk or creamy froth in seconds
- ⑥ Stainless steel conical burr grinder with 13 coarseness positions
- ⑦ 15 bar pump pressure
- ⑧ Self-cleaning function and easy to empty coffee grounds container and drip tray
- ⑨ 81 fl oz (2.4L) water tank capacity

ACCESSORIES

- ① Milk Container (Auto-Froth)
- ② Steam Wand
- ③ Coffee Spoon
- ④ Cleaning Brush
- ⑤ Descaler Solution - 1 bottle
- ⑥ Water Hardness Indicator Paper
- ⑦ Water Filter

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to make a bold statement in the kitchen space with a striking handle and brushed stainless steel finish, this Combi-Steam oven matches seamlessly with our Professional style family of appliances. With versatile cooking options including steam or convection, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OS30NPUX3
30" Series 9 Professional Compact Combi-Steam Oven

SERIES & STYLE

Series 9
Professional

ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf
- ③ Flat Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack

FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Premium soft open and close door
- ④ 1.6 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ⑥ Large Perforated Steam Dish
- ⑦ Small Perforated Steam Dish
- ⑧ Large Steam Dish
- ⑩ Wired Temperature Sensor
- ⑪ Descale Solution - 2 sachets (Part 580925)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to make a bold statement in the kitchen space with a striking handle and brushed stainless steel finish, this Convection-Speed oven matches seamlessly with our Professional style family of appliances. Versatile cooking options including microwave or convection offer efficient heating across a variety of dishes. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OM30NPUX3
30" Series 9 Professional Compact Convection-Speed Oven

SERIES & STYLE

Series 9
Professional

FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space. Matches with Professional style family of appliances
- ② Combines fast microwave cooking with even convection heat for versatile, efficient heating across a variety of dishes
- ③ With soft open and close, the CoolTouch door is safe to touch from the outside - protecting hands and surrounding cabinetry
- ④ Generous 1.3 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑧ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ① Chrome Side Ladders
- ② Flat Wire Shelf
- ③ Step Down Wire Shelf
- ④ Broil Rack
- ⑤ Glass Tray
- ⑥ Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to make a bold statement in the kitchen space with a striking handle and brushed stainless steel finish, this Warming Drawer matches seamlessly with our Professional style family of appliances. Featuring a soft-close mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

PRODUCTS

WB30SPEX3
30" Series 9 Professional Warming Drawer

SERIES & STYLE

Series 9
Professional

FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space. Matches with Professional style family of appliances
- ② Soft-close drawer for a smooth closure
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean stainless steel finish for a bold and durable look
- ⑤ Automatic switch-off and delayed start functionality to help keep dishes warm until it is time to serve
- ⑥ Room for 16 standard-sized place settings
- ⑦ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility


ACCESSORIES

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



Integrated Warming Drawer WB30SDEI3 with Compact Combi-Steam Oven OS30NPUX3

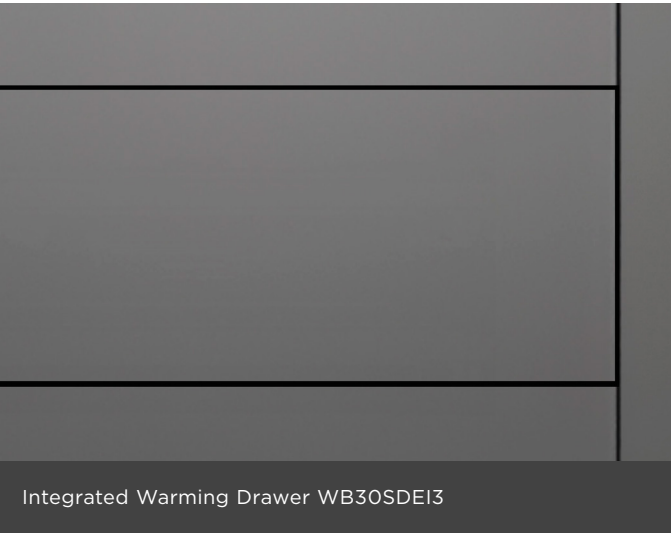

Integrated Warming Drawer WB30SDEI3

OVERVIEW

Panel ready design allows for seamless integration and customisation of this Warming Drawer with kitchen cabinetry for a cohesive kitchen look. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

PRODUCTS

WB30SDEI3*
30" Series 9 Integrated Warming Drawer

*Panel ready.

SERIES & STYLE

Series 9
Integrated

FEATURES

- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Automatic switch-off and delayed start functionality, to help keep dishes warm until it is time to serve
- ⑤ Room for 16 standard-sized place settings
- ⑥ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility

ACCESSORIES

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to make a bold statement in the kitchen space with a striking handle and brushed stainless steel finish, this Vacuum Seal Drawer matches seamlessly with our Professional style family of appliances. A soft-close mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

PRODUCTS

VB30SPEX3
30" Series 9 Professional Vacuum Seal Drawer

SERIES & STYLE

Series 9
Professional


FEATURES

- ① Professional style is designed to make a bold statement in the kitchen space. Matches with Professional style family of appliances
- ② Soft-close drawer for a smooth closure
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean stainless steel finish for a bold and durable look
- ⑤ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑥ Allows effortless preparation for sous vide cooking
- ⑦ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately

ACCESSORIES

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

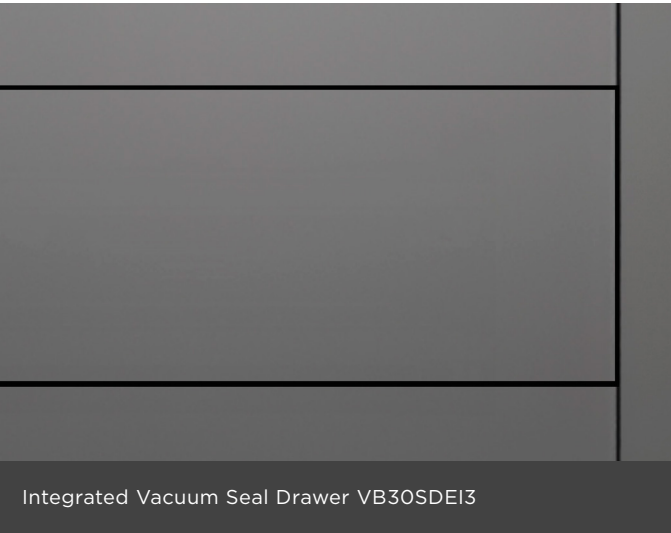

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

OVERVIEW

Panel ready design allows for seamless integration and customisation of this Vacuum Seal Drawer with kitchen cabinetry for a cohesive kitchen look. A push-to-open mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

PRODUCTS

VB30SDEI3*
30" Series 9 Integrated Vacuum Seal Drawer

*Panel ready.

SERIES & STYLE

Series 9
Integrated

FEATURES







- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑤ Allows effortless preparation for sous vide cooking
- ⑥ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately

ACCESSORIES

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

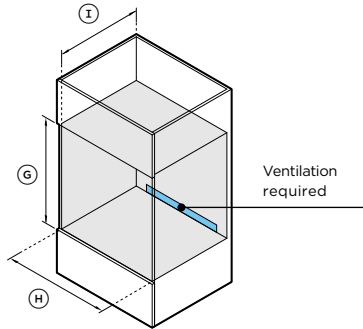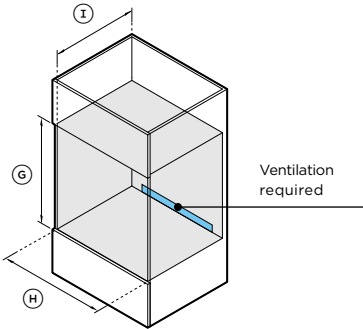

PRODUCT DIMENSIONS		
A	Overall height	
B	Overall width	
C	Chassis height	
D	Chassis width	
E	Chassis depth	
F	Control panel thickness	
	Depth with door fully open*	

*Measured from front of control panel.

CAVITY DIMENSIONS		
G	Minimum inside height of cavity	
H	Minimum inside width of cavity	
I	Minimum inside depth of cavity*	
	Recommended cabinet height	
	Recommended cabinet width	

*Measured from front of chassis.**Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide.

SELF-CLEANING OVEN OB30SPPUX3		
	inch	mm
A	28 11/16	729
B	29 7/8	758
C	27 7/8	708
D	28 3/8	720
E	22 5/8	575
F	15/16	24
	23 1/4	590

	inch	mm
G	28 1/32	712
H	28 1/2	724
I	23 1/2**	597**
	28 3/4	731
	30	762

SELF-CLEANING STEAM ASSIST OVEN OB30SPPSUX3		
	inch	mm
A	28 11/16	729
B	29 7/8	758
C	27 7/8	708
D	28 3/8	720
E	22 5/8	575
F	15/16	24
	23 1/4	590

	inch	mm
G	28 1/32	712
H	28 1/2	724
I	23 1/2**	597**
	28 3/4	731
	30	762







COMBI-STEAM OVEN OS30SPUX3		
	inch	mm
A	23 9/16	598
B	29 7/8	758
C	22 5/8	575
D	28 3/8	720
E	22 7/16	545
F	15/16	24
	18 1/8	460

	inch	mm
G	22 13/16	580
H	28 1/2	724
I	21 5/8	550
	23 5/8	600
	30	762

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

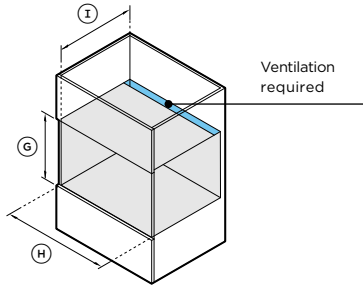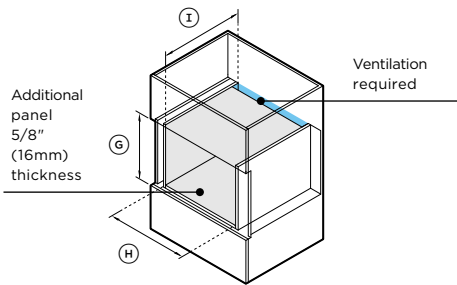

PRODUCT DIMENSIONS	
A Overall height	
B Overall width	
C Chassis height	
D Chassis width	
E Chassis depth	
F Control panel thickness	
Depth with door fully open**	

*Measurements with trim kit. **Measured from front of control panel.

CAVITY DIMENSIONS	
G Minimum inside height of cavity	
H Minimum inside width of cavity	
I Minimum inside depth of cavity*	
Recommended cabinet height	
Recommended cabinet width	

*Measured from front of chassis. **Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide. ***Cabinetry requires additional vertical sidewalls to secure the product. ****Includes spacer thickness, Spacer required only for standalone installation.

Note: Built-In Coffee Maker measurements are different to other products. Configurations are possible, but consider installation requirements.

BUILT-IN COFFEE MAKER EB30PSX1		
	inch	mm
A Overall height	18 1/2*	470*
B Overall width	29 13/16*	757*
C Chassis height	17 7/16	442
D Chassis width	22 1/16	560
E Chassis depth	17 6/16	445
F Control panel thickness	1 9/16*	40*
Depth with door fully open**	-	-

	inch	mm
G Minimum inside height of cavity	18 3/8****	466****
H Minimum inside width of cavity	22 1/16***	560***
I Minimum inside depth of cavity*	21 1/2**	545**
Recommended cabinet height	18 9/16	472
Recommended cabinet width	30	762

COMPACT COMBI-STEAM OVEN OS30NPUX3		
	inch	mm
A Overall height	18	458
B Overall width	29 7/8	758
C Chassis height	17 1/8	435
D Chassis width	28 3/8	720
E Chassis depth	21 7/16	545
F Control panel thickness	15/16	24
Depth with door fully open**	12 5/8	320





	inch	mm
G Minimum inside height of cavity	17 5/16	440
H Minimum inside width of cavity	28 1/2	724
I Minimum inside depth of cavity*	21 5/8	550
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

COMPACT CONVECTION-SPEED OVEN OM30NPUX3		
	inch	mm
A Overall height	18	458
B Overall width	29 7/8	758
C Chassis height	17 1/8	435
D Chassis width	28 3/8	720
E Chassis depth	21 7/16	545
F Control panel thickness	15/16	24
Depth with door fully open**	12 5/8	320





	inch	mm
G Minimum inside height of cavity	17 5/16	440
H Minimum inside width of cavity	28 1/2	724
I Minimum inside depth of cavity*	21 5/8**	550**
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS



CAVITY DIMENSIONS



PRODUCT DIMENSIONS	
(A) Overall height	
(B) Overall width	
(C) Chassis height	
(D) Chassis width	
(E) Chassis depth*	
(F) Front panel thickness	
Front panel height	
Front panel width	

WARMING DRAWER WB30SPEX3	
inch	mm
10 11/16	271
29 7/8	758
10 11/16	271
27 3/4	704
21 9/16	547
15/16	24
10 1/2	267
29 7/8	758

INTEGRATED WARMING DRAWER WB30SDEI3	
inch	mm
10 11/16	271
29 7/8	758
10 11/16	271
28 15/32	723
22 9/32	566
min 5/8***	min 16***
min 10 1/2	min 267
min 29 7/8	min 758

VACUUM SEAL DRAWER VB30SPEX3	
inch	mm
10 11/16	271
29 7/8	758
10 11/16	271
28 1/2**	724**
21 11/16	551
15/16*	24
10 1/2	267
29 7/8	758

INTEGRATED VACUUM SEAL DRAWER VB30SDEI3	
inch	mm
10 11/16	271
29 7/8	758
10 11/16	271
28 15/32**	723**
22 1/2	572
min 5/8***	min 16***
min 10 1/2	min 267
min 29 7/8	min 758

*Including power plug. **Including side brackets. ***A clearance of 1/16" (2mm) between the cabinet and the custom panel is required for the push-to-open mechanism (spacer included). Maximum custom panel weight 11 lb (5kg).

CAVITY DIMENSIONS	
(G) Minimum inside height of cavity	
(H) Minimum inside width of cavity	
(I) Minimum inside depth of cavity*	
Recommended cabinet height	
Recommended cabinet width	

inch	mm
10 3/4	273
28 1/2	724
22 13/16	580
10 3/4	273
30	762

inch	mm
10 3/4	273
28 1/2	724
22 13/16	580
10 3/4	273
30	762


inch	mm
10 3/4	273
28 1/2	724
22 13/16	580
10 3/4	273
30	762

inch	mm
10 3/4	273
28 1/2	724
22 13/16	580
10 3/4	273
30	762

*Measured from front of chassis.
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

ISOMETRIC
VIEW

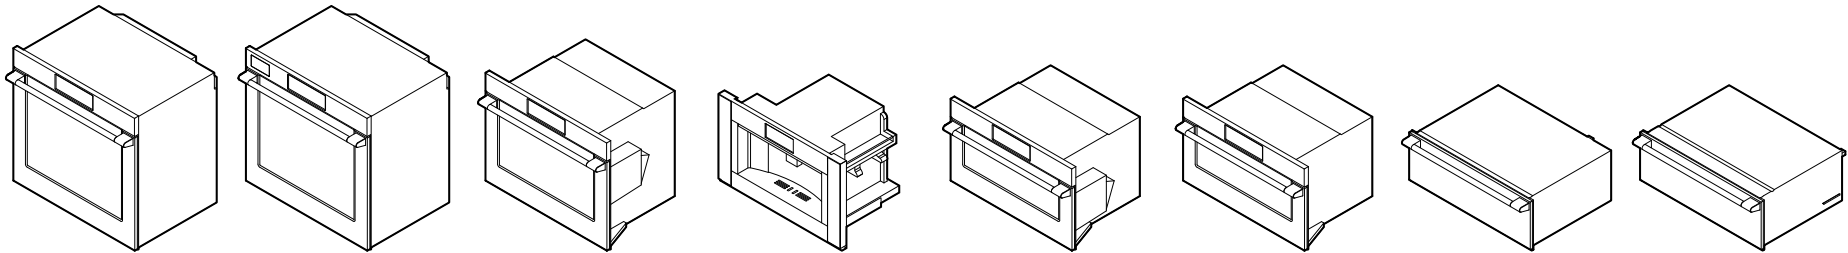


	SELF-CLEANING OVEN OB30SPPUX3	SELF-CLEANING STEAM ASSIST OVEN OB30SPPSUX3	COMBI-STEAM OVEN OS30SPUX3	BUILT-IN COFFEE MAKER EB30PSX1	COMPACT COMBI-STEAM OVEN OS30NPUX3	COMPACT CONVECTION- SPEED OVEN OM30NPUX3	WARMING DRAWER WB30SPEX3, WB30SDEI3	VACUUM SEAL DRAWER VB30SPEX3, VB30SDEI3
PRODUCT REQUIREMENTS								
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	120 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz
Service	20 A	20 A	20 A	15 A	20 A	20 A	15 A	15 A
Connection	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Plug with flex cord 66 15/16" (1700mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Plug with flex cord 70 7/8" (1800mm)	Plug with flex cord 70 7/8" (1800mm)
WEIGHT								
Packaged	211lb (96kg)	216lb (98kg)	152lb (69kg)	68lb (31kg)	121lb (55kg)	121lb (55kg)	82lb(37kg) Integrated 60lb (27kg)	120lb(kg) Integrated 106lb (48kg)
Unpackaged	178lb (81kg)	183lb (83kg)	119lb (54kg)	60lb (27kg)	101lb (46kg)	101lb (46kg)	73lb(33kg) Integrated 51lb (23kg)	110lb(kg) Integrated 99lb (45kg)
CAPACITY								
Total Oven capacity	4.9cu ft (137L)	4.9cu ft (137L)	3cu ft (85L)	-	1.9cu ft (55L)	1.7cu ft (49L)	-	-
Total water tank capacity	-	22.65fl oz (0.67L)	47.3fl oz (1.4L)	81 fl oz (2.4L)	47.3fl oz (1.4L)	-	-	-

Note: All Coffee Makers and Steam Ovens have internal water tanks which need to be filled manually. No external water supply is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DATA SHEETS

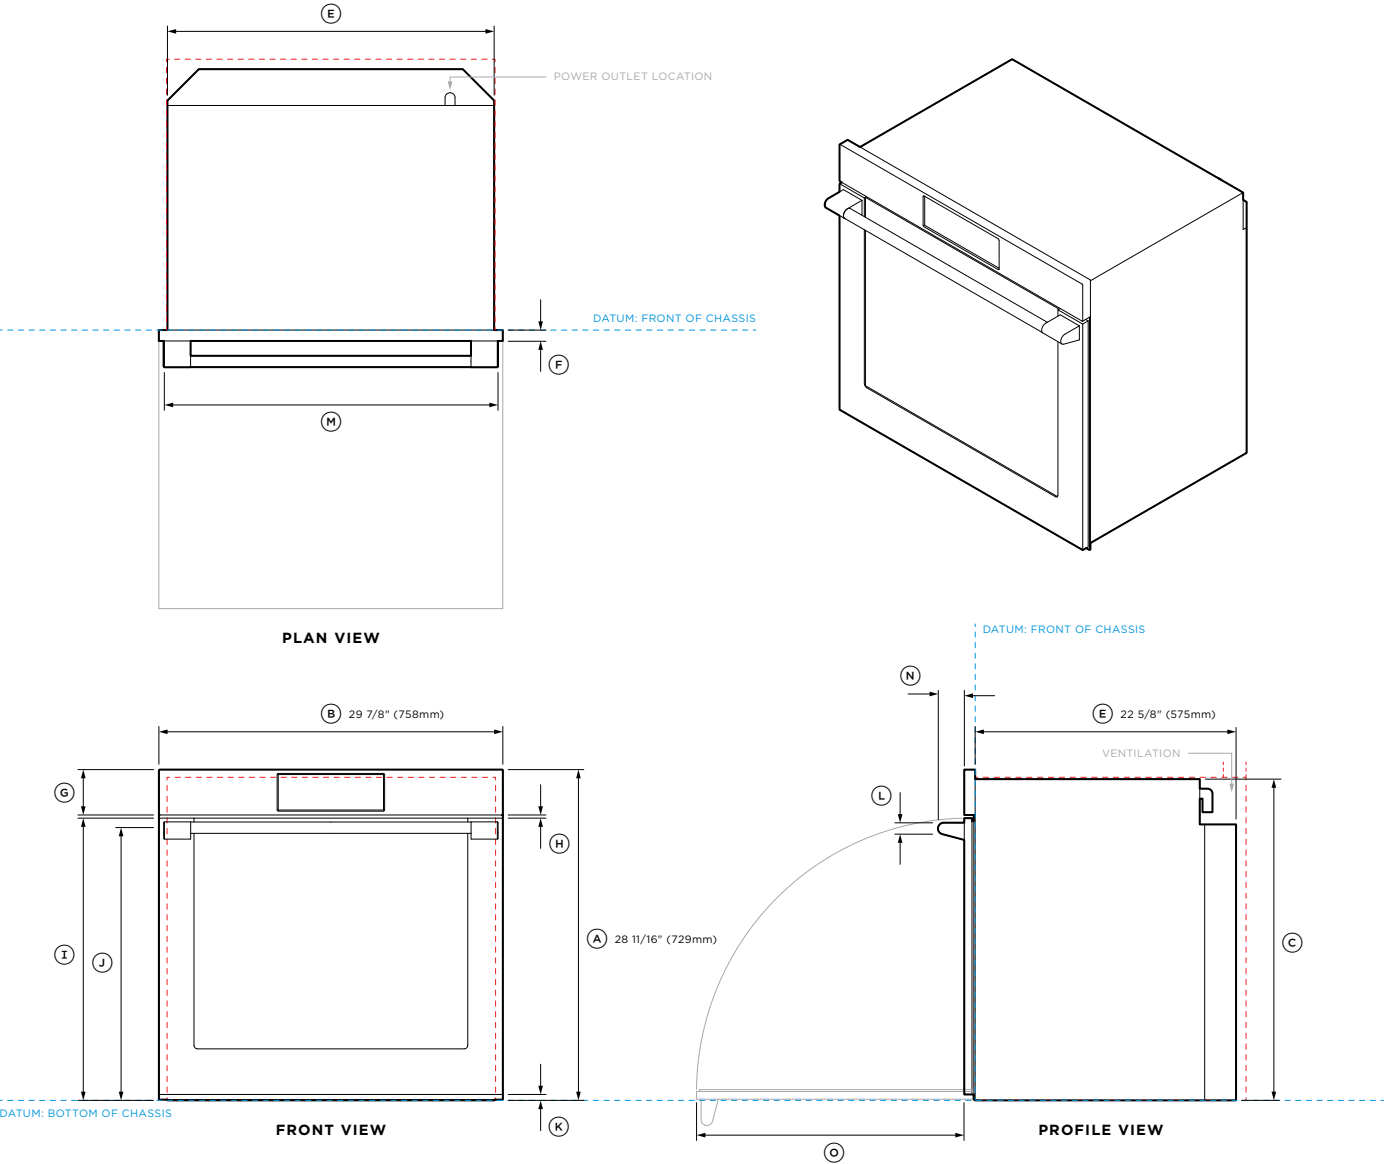

Model no:		
OB30SPPUX3	30" Series 9 Professional Self-Cleaning Oven	

Product Dimensions		inch	mm
A	Overall height of product	28 11/16	729
B	Overall width of product	29 7/8	758
C	Height of chassis	27 7/8	708
D	Width of chassis	28 3/8	720
E	Depth of chassis	22 5/8	575
F	Thickness of control panel (excludes handle)	15/16	24
G	Height of control panel	3 15/16	100
H	Gap between door and control panel	9/32	7
I	Height from bottom datum to top of door	24 1/2	622
J	Height from bottom datum to centerline of handle rail	23 21/32	601
K	Visual gap height	1/2	13
L	Thickness of handle rail	1	25
M	Width of handle	29	737
N	Depth of handle	2 9/32	58
O	Depth with door fully open*	23 3/8	594


*Measured from front of control panel.

Minimum Clearances		inch	mm
Minimum inside height of cavity		28 1/32	712
Minimum inside width of cavity		28 1/2	724
Minimum inside depth of cavity*		23 1/2	597
Rear ventilation height**		2 5/32	55
Rear ventilation width**		24	600
Minimum clearance above products control panel to upper cabinetry front panel or appliance		1/16	2
Minimum clearance between bottom of chassis to lower cabinetry front panel or appliance		1/16	2
Minimum clearance between adjacent front panel or appliance		1/16	2
Recommended cabinet height		28 3/4	731
Recommended cabinet width		30	762

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

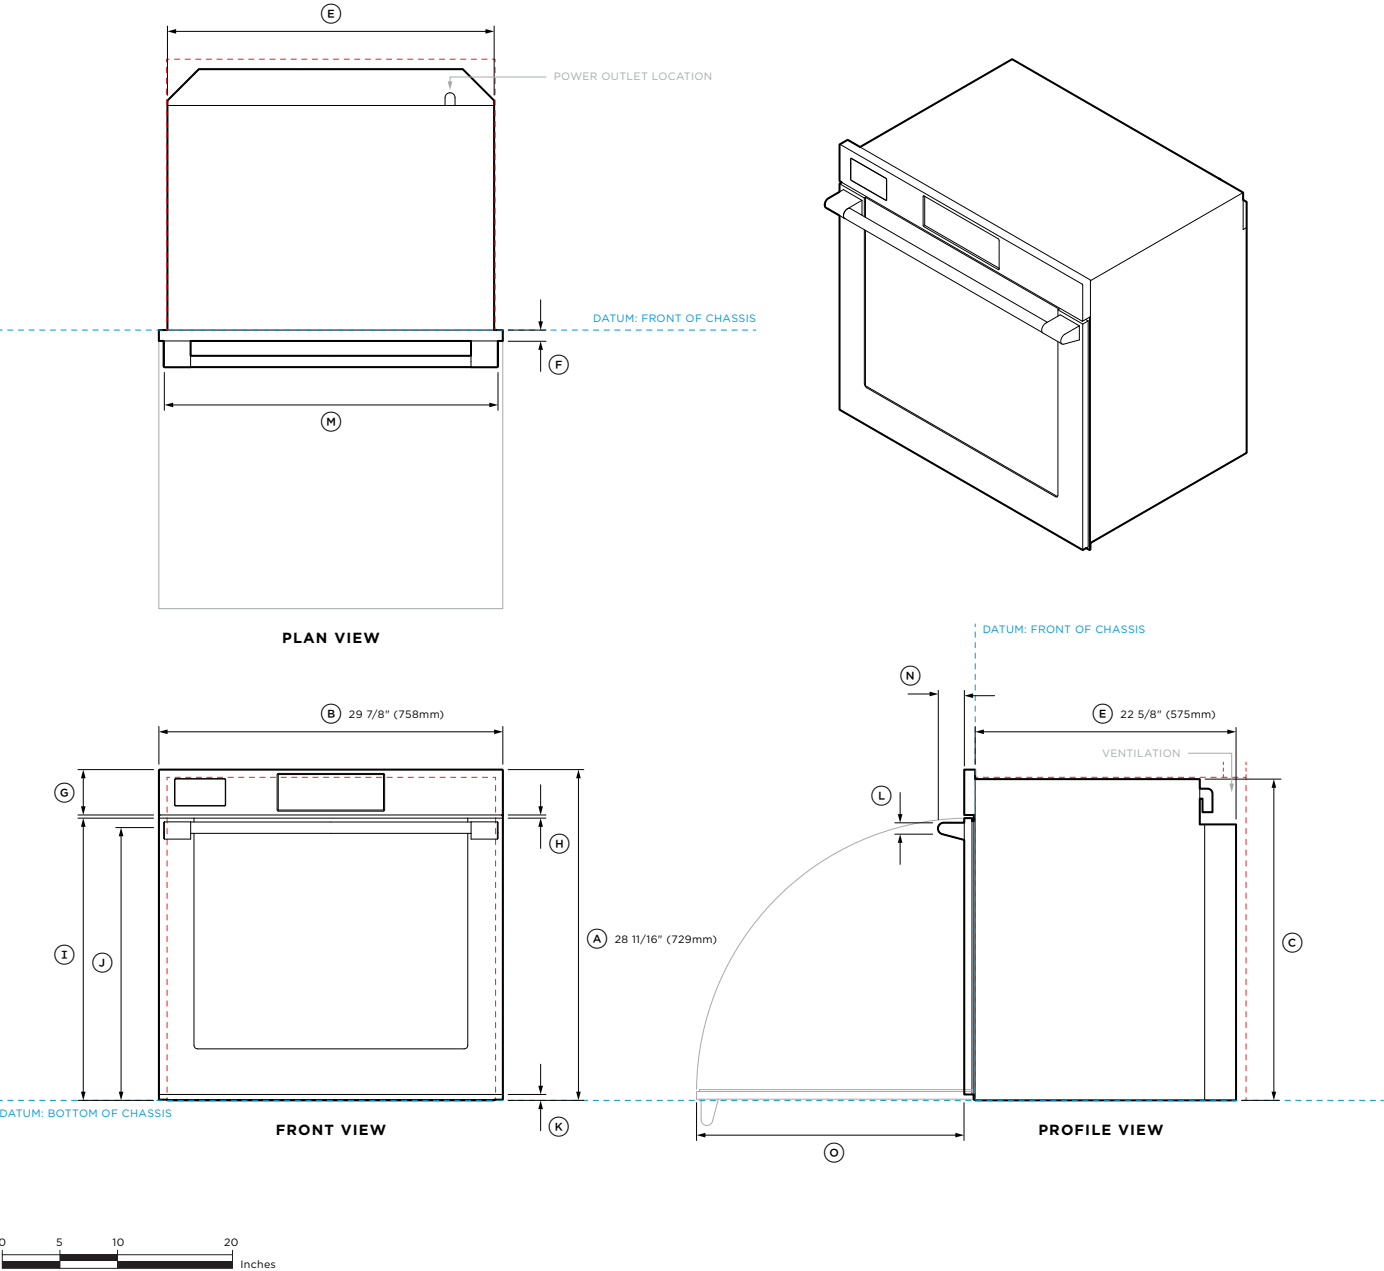

Model no:
OB30SPPSUX3 30" Series 11 Professional Self-Cleaning Steam Assist Oven

Product Dimensions	inch	mm
(A) Overall height of product	28 11/16	729
(B) Overall width of product	29 7/8	758
(C) Height of chassis	27 7/8	708
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	22 5/8	575
(F) Thickness of control panel (excludes handle)	15/16	24
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	24 1/2	622
(J) Height from bottom datum to centerline of handle rail	23 21/32	601
(K) Visual gap height	1/2	13
(L) Thickness of handle rail	1	25
(M) Width of handle	29	737
(N) Depth of handle	2 9/32	58
(O) Depth with door fully open*	23 3/8	594


*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	28 1/32	712
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	23 1/2	597
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of chassis to lower cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	28 3/4	731
Recommended cabinet width	30	762



*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

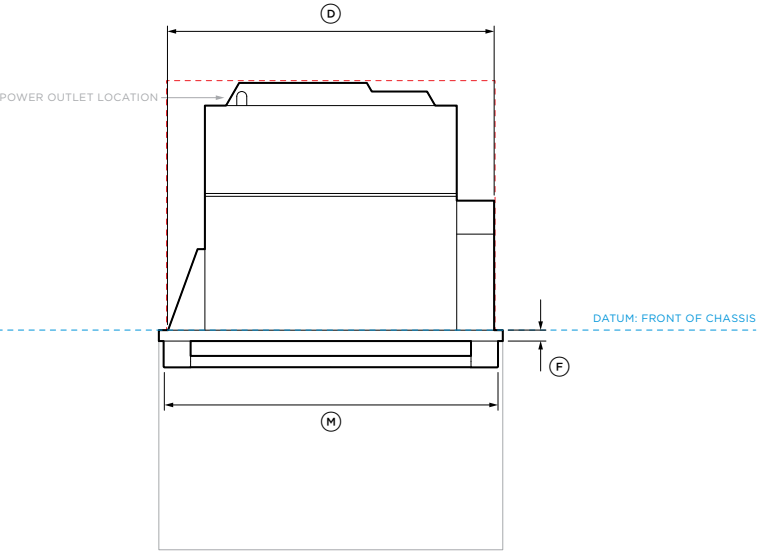


PLAN VIEW

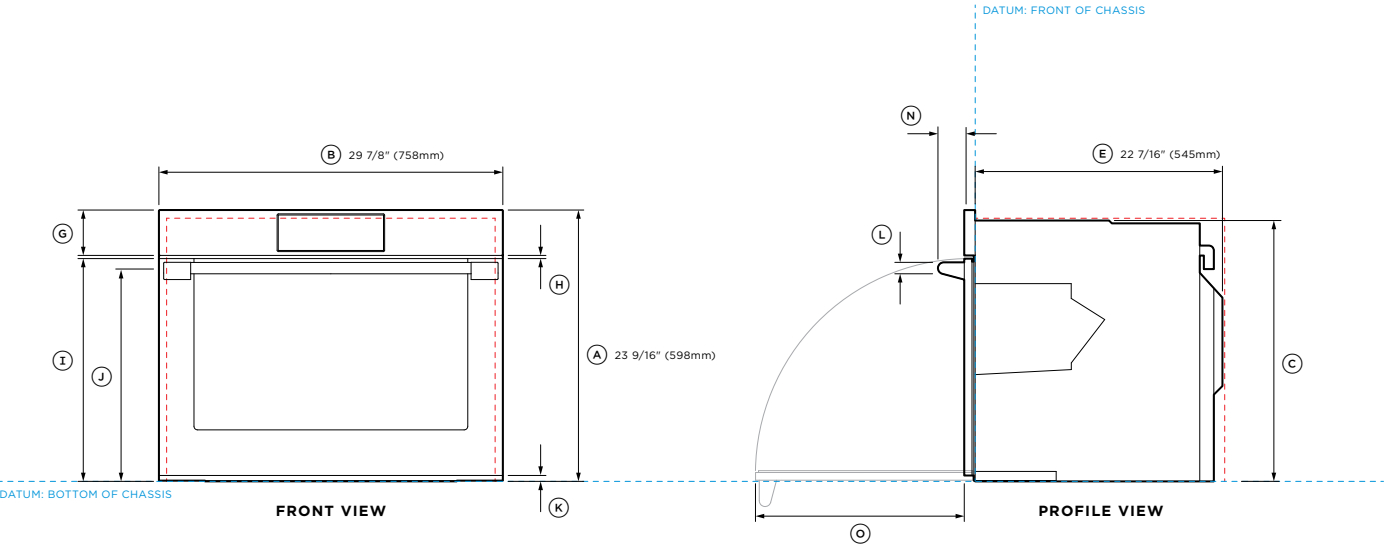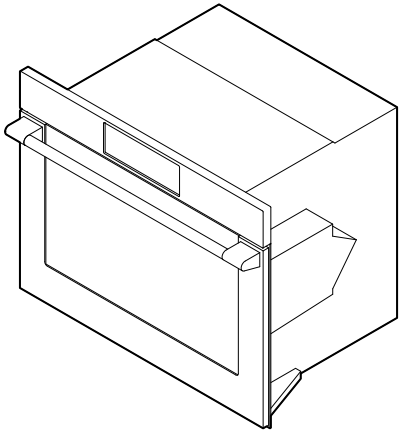

FRONT VIEW

PROFILE VIEW



Model no:		
OS30SPUX3	30" Series 11 Professional Combi-Steam Oven	

Product Dimensions	inch	mm
(A) Overall height of product	23 9/16	598
(B) Overall width of product	29 7/8	758
(C) Height of chassis	22 5/8	575
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	22 7/16	545
(F) Thickness of control panel (excludes handle)	15/16	24
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	19 5/16	491
(J) Height from bottom datum to centerline of handle rail	18 1/2	470
(K) Visual gap height	1/2	13
(L) Thickness of handle	1	25
(M) Width of handle	29	737
(N) Depth of handle	2 9/32	58
(O) Depth with door fully open*	18 1/8	460



*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	22 13/16	580
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	23 5/8	600
Recommended cabinet width	30	762

*Measured from front of chassis.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

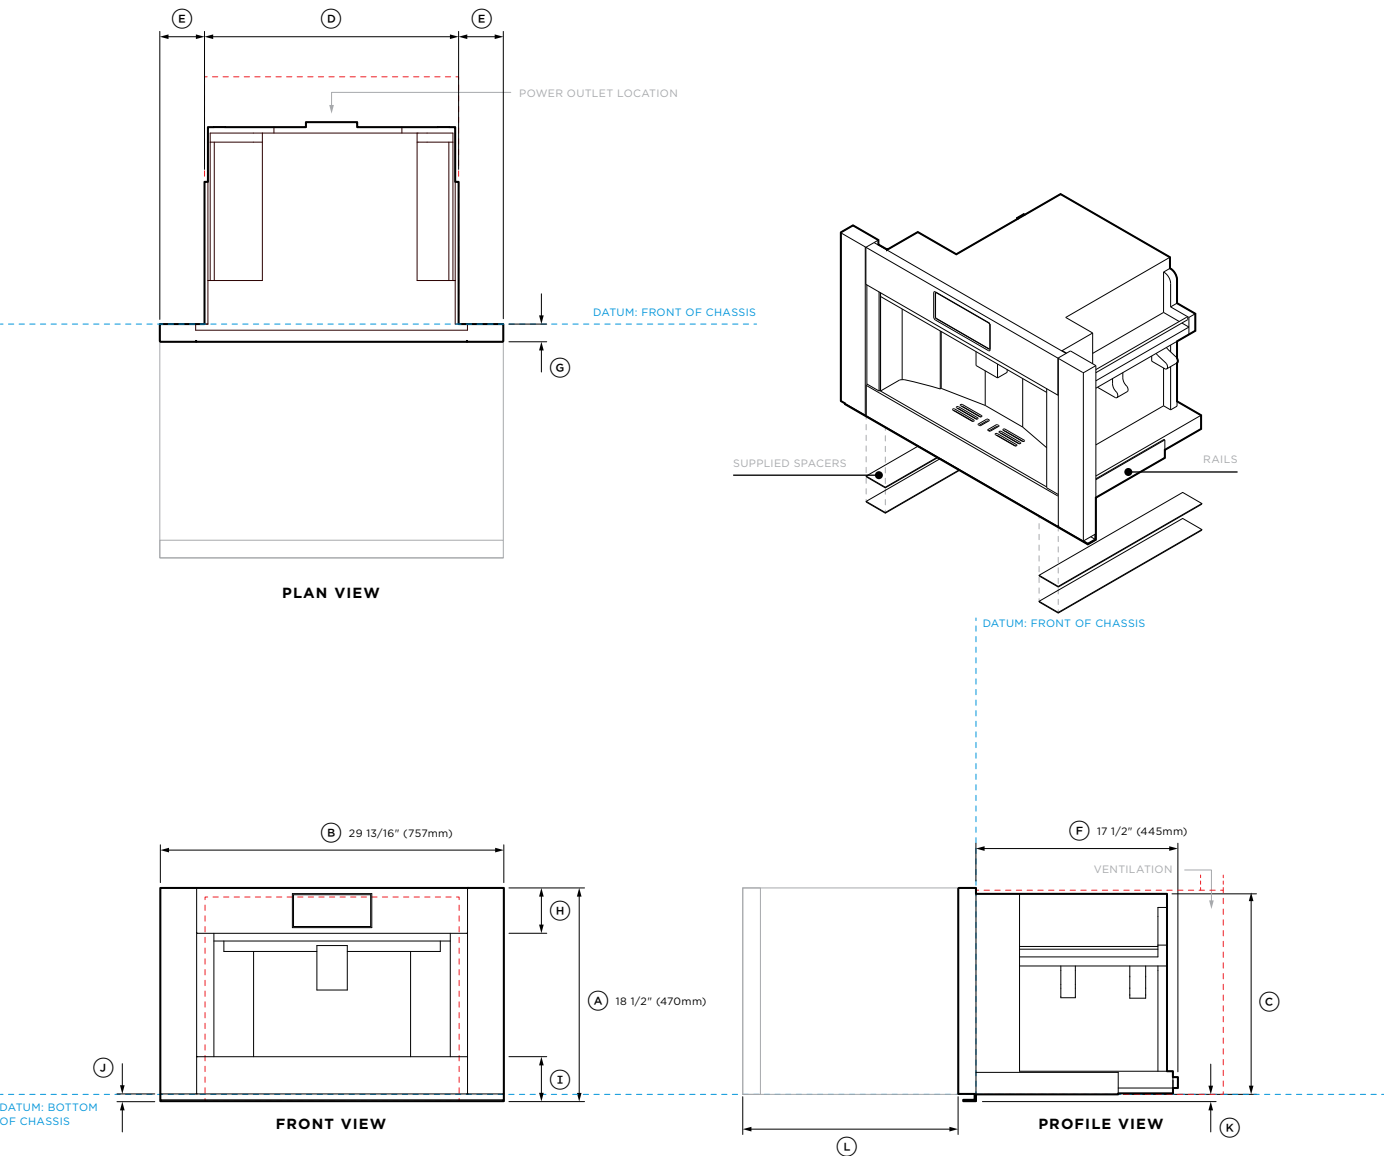

Model no:		
EB30PSX1	30" Series 9 Professional Built-in Coffee Maker	

Product Dimensions		inch	mm
A	Overall height of product	18 1/2	470
B	Overall width of product	29 13/16	757
C	Height of chassis	17 7/16	442
D	Width of chassis	22 1/16	560
E	Distance from side of chassis to front panel	3 7/8	98.5
F	Depth of chassis	17 1/2	445
G	Thickness of control panel	1 9/16	40
H	Height of control panel	3 15/16	100
I	Height of horizontal lower section from bottom datum	3 7/8	98
J	Visual gap height	5/8	16
K	Height from bottom of chassis to bottom of lower trim	5/8	15
L	Depth of built-in coffee maker fully pulled out*	18 11/16	475





*Measured from front of control panel.

Minimum Clearances		inch	mm
Minimum inside height of cavity*		17 3/4	450
Minimum inside width of cavity**		22 1/16	560
Minimum inside depth of cavity***		21 1/2	545
Rear ventilation height****		2	50
Rear ventilation width****		22 1/16	560
Minimum clearance above products control panel to upper cabinetry front panel or appliance		1/16	2
Minimum clearance between bottom of chassis to lower cabinetry front panel or appliance		1/16	2
Minimum clearance between adjacent front panel or appliance		3/32	2.5
Recommended cabinet height		18 9/16	472
Recommended cabinet width		30	762

*Additional panel of 5/8" (16mm) required at the base of the cavity for under bottom of chassis for standalone installation only.
**Cabinetry requires additional vertical sidewalls to secure the product.
***Measured from front of chassis.
****A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

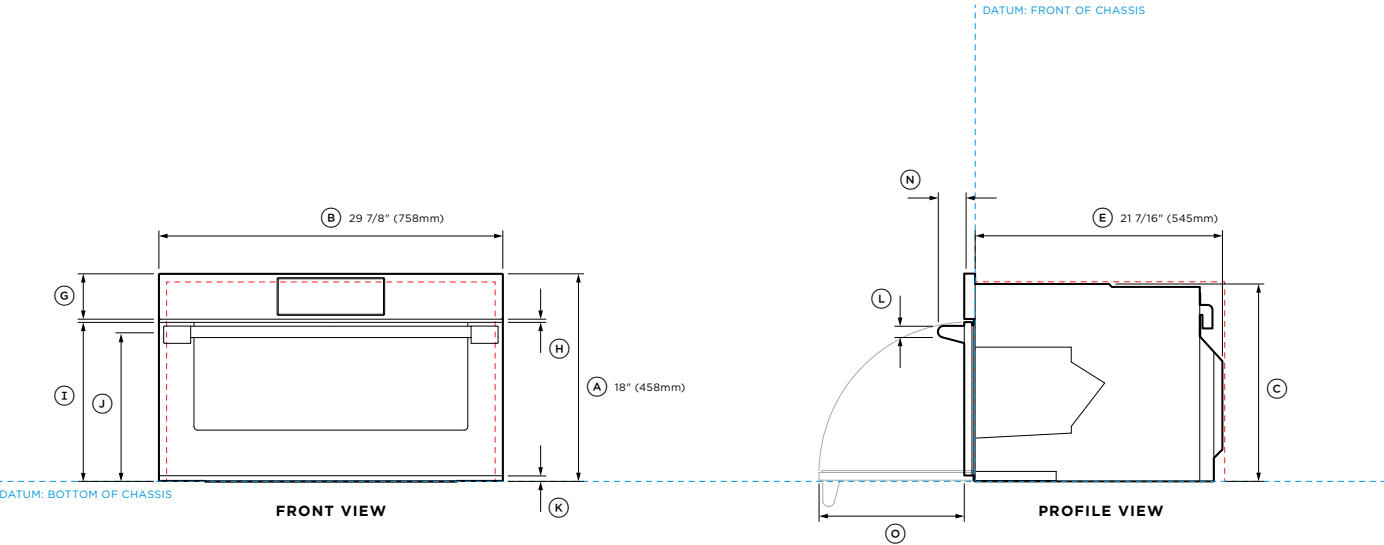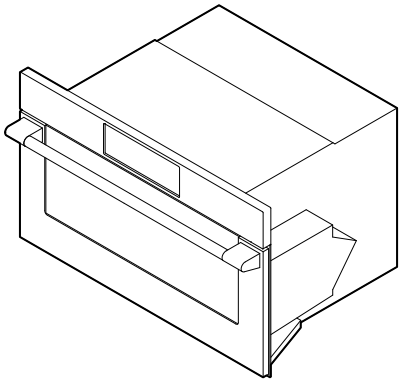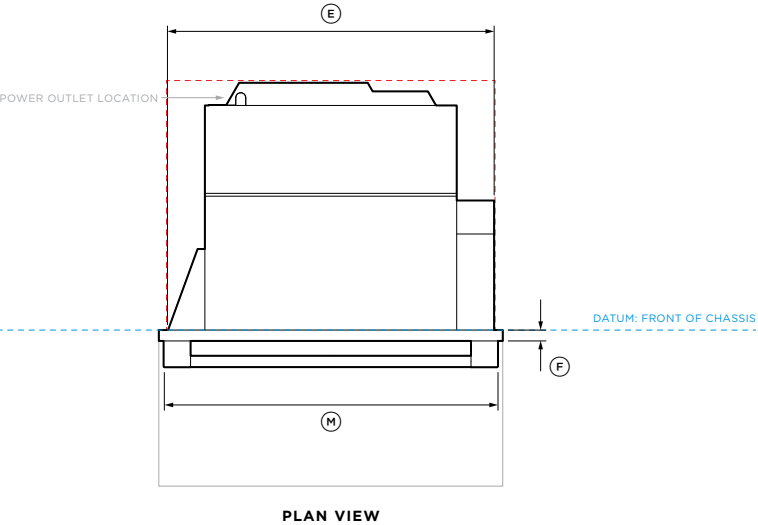

Model no:		
OS30NPUX3	30" Series 9 Professional Compact Combi-Steam Oven	

Product Dimensions	inch	mm
(A) Overall height of product	18	458
(B) Overall width of product	29 7/8	758
(C) Height of chassis	17 1/8	435
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	21 7/16	545
(F) Thickness of control panel (excludes handle)	15/16	24
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	13 13/16	351
(J) Height from bottom datum to centerline of handle rail	13	330
(K) Visual gap height	1/2	13
(L) Thickness of handle rail	1	25
(M) Width of handle	29	737
(N) Depth of handle	2 9/32	58
(O) Depth with door fully open*	12 5/8	320


*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

*Measured from front of chassis.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

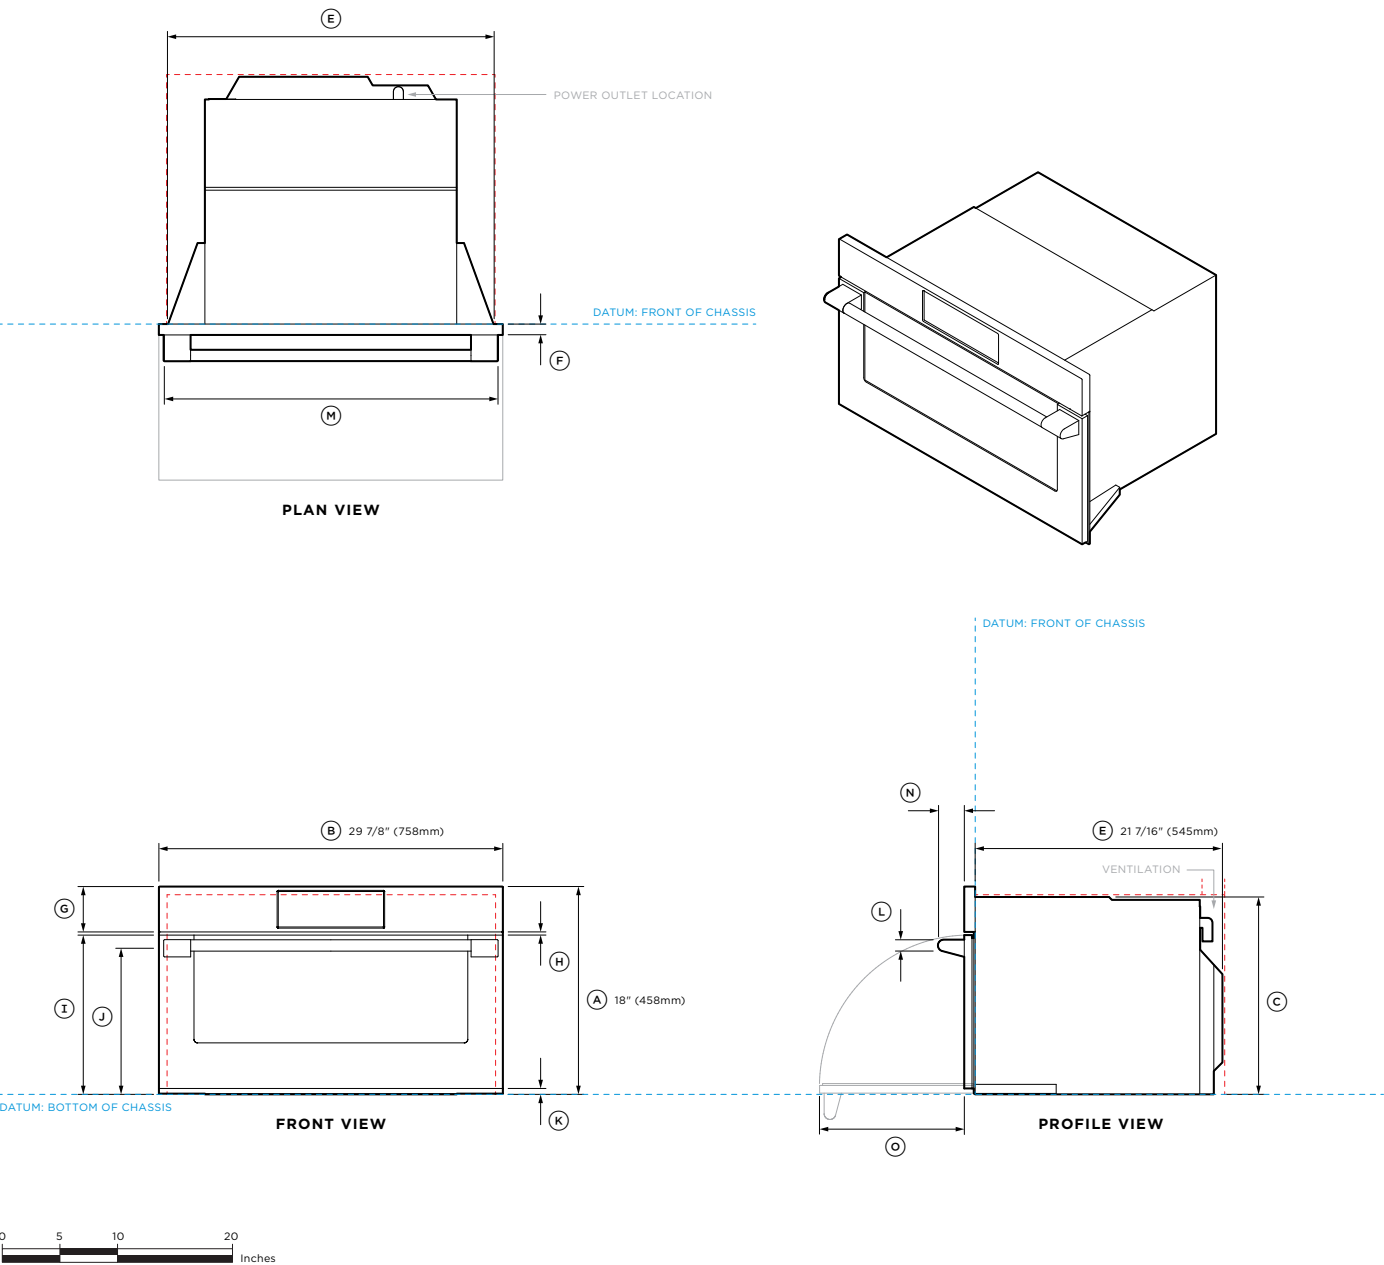

Model no:
OM30NPUX3 30" Series 9 Professional Compact Convection-Speed Oven

Product Dimensions	inch	mm
(A) Overall height of product	18	458
(B) Overall width of product	29 7/8	758
(C) Height of chassis	17 1/8	435
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	21 7/16	545
(F) Thickness of control panel (excludes handle)	15/16	24
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	13 13/16	351
(J) Height from bottom datum to centerline of handle rail	13	330
(K) Visual gap height	1/2	13
(L) Thickness of handle rail	1	25
(M) Width of handle	29	737
(N) Depth of handle	2 9/32	58
(O) Depth with door fully open*	12 5/8	320


*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

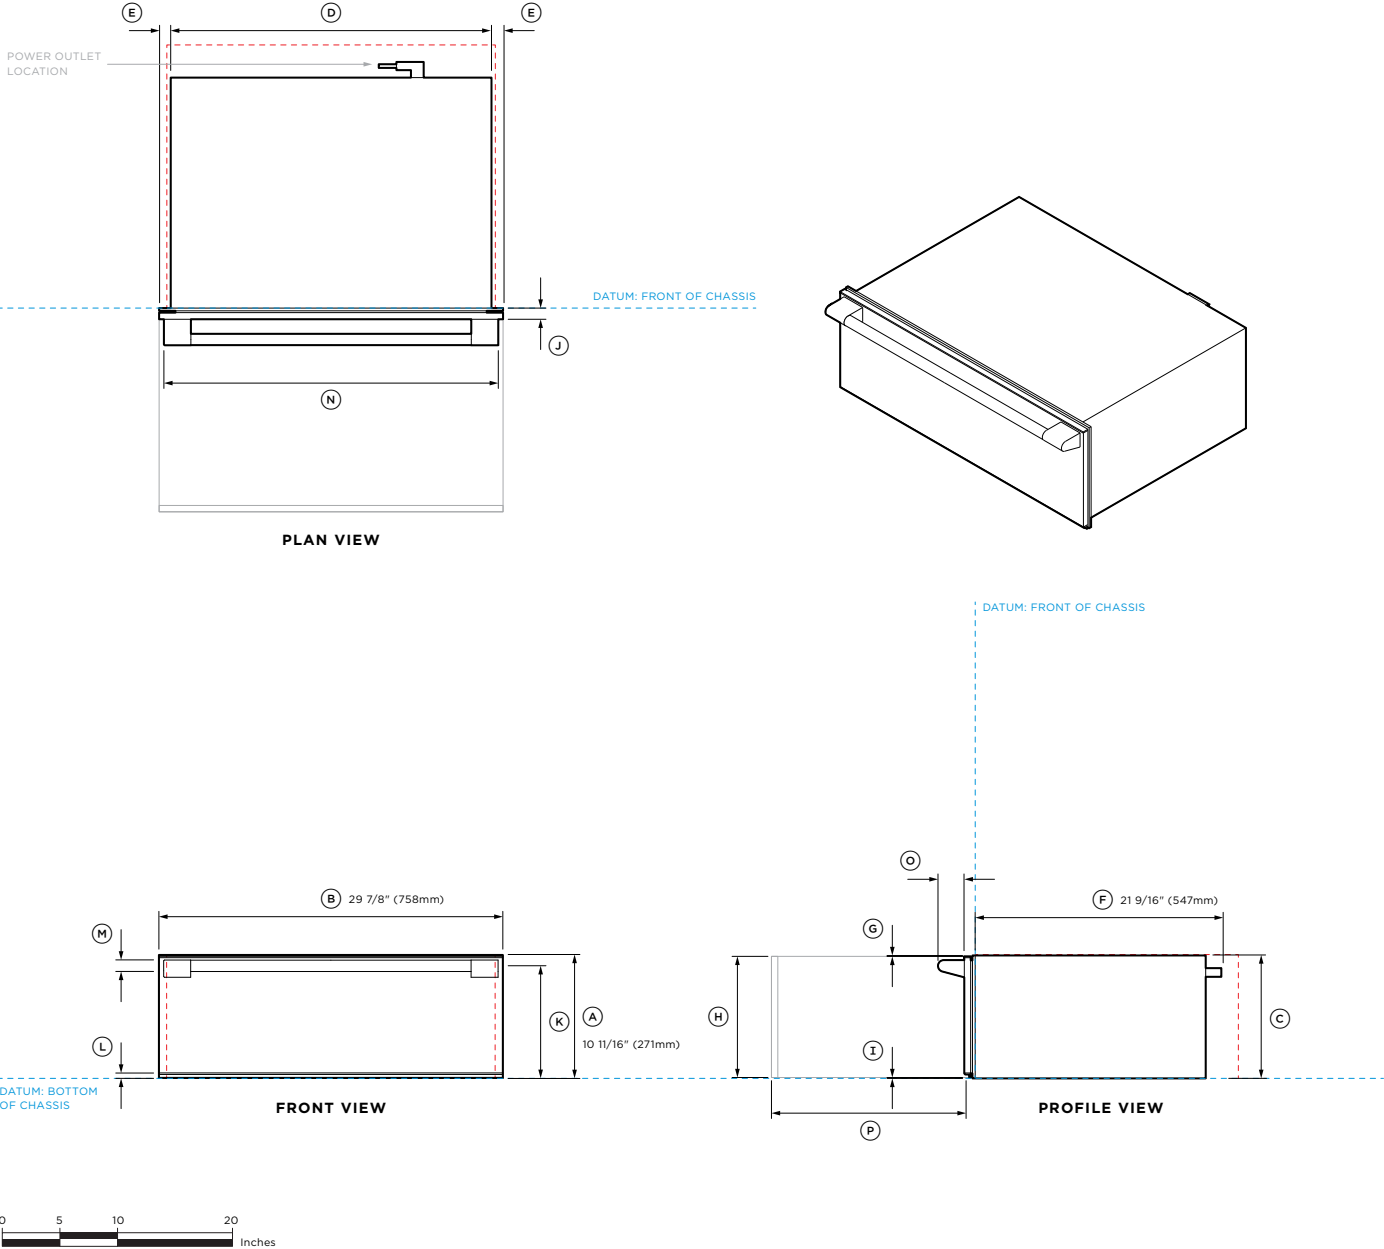

Model no:		
WB30SPEX3	30" Series 9 Professional Warming Drawer	

Product Dimensions		inch	mm
A	Overall height of product	10 11/16	271
B	Overall width of product	29 7/8	758
C	Height of chassis	10 11/16	271
D	Width of chassis	27 3/4	704
E	Distance from side of chassis to front panel	1	25.5
F	Depth of chassis (including power plug)	21 9/16	547
G	Height from top of front panel to top of chassis	1/16	2
H	Height of front panel	10 1/2	267
I	Height from bottom datum to bottom of front panel	1/16	2
J	Thickness of front panel	15/16	24
K	Height from bottom datum to centerline of handle rail	9 13/16	249
L	Visual gap height	1/2	13
M	Thickness of handle rail	1	25
N	Width of handle	29	737
O	Depth of handle	2 9/32	58
P	Depth of drawer open*	16 7/8	429

*Measured from front of front panel.

Minimum Clearances		inch	mm
Minimum inside height of cavity		10 3/4	273
Minimum inside width of cavity		28 1/2	724
Minimum inside depth of cavity*		22 13/16	580
Minimum clearance above products front panel to upper cabinetry front panel or appliance**		5/32	4
Minimum clearance between adjacent front panel or appliance		1/16	2
Recommended cabinet height		10 3/4	273
Recommended cabinet width		30	762


*Measured from front of chassis.

**Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

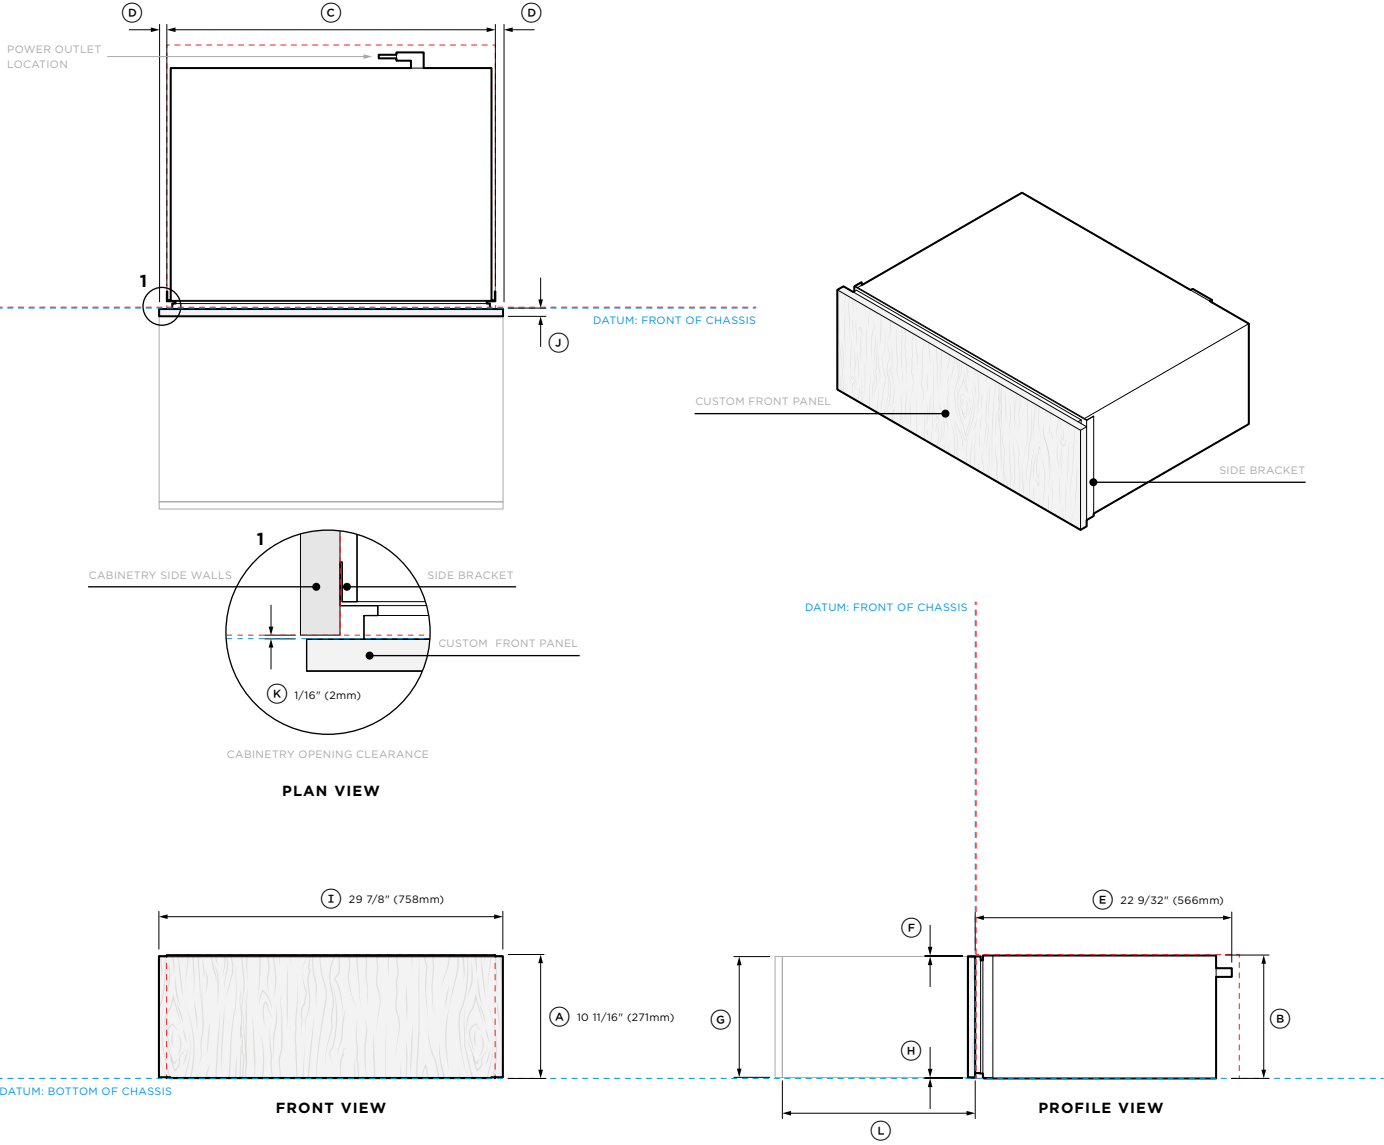

Model no:		
WB30SDEI3 30" Series 9 Integrated Warming Drawer		
Product Dimensions		
	inch	mm
(A) Overall height of product	10 11/16	271
(B) Height of chassis	10 11/16	271
(C) Width of chassis (including side bracket)	28 15/32	723
(D) Distance from side bracket to custom front panel	11/16	17
(E) Depth of chassis (including power plug)	22 9/32	566
(F) Height from top of custom front panel to top of chassis	1/16	2
(G) Height of custom front panel	min 10 1/2	min 267
(H) Height from bottom datum to bottom of custom front panel	1/16	2
(I) Width of custom front panel	min 29 7/8	min 758
(J) Thickness of custom front panel	min 5/8	min 16
(K) Clearance behind custom front panel for push-to-open mechanism*	1/16	2
(L) Depth of drawer open**	16 3/4	425


*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).
**Measured from front of chassis.
Note: Maximum custom front panel weight 11 lb (5kg).

Minimum Clearances		
	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 13/16	580
Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762


*Measured from front of chassis.
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

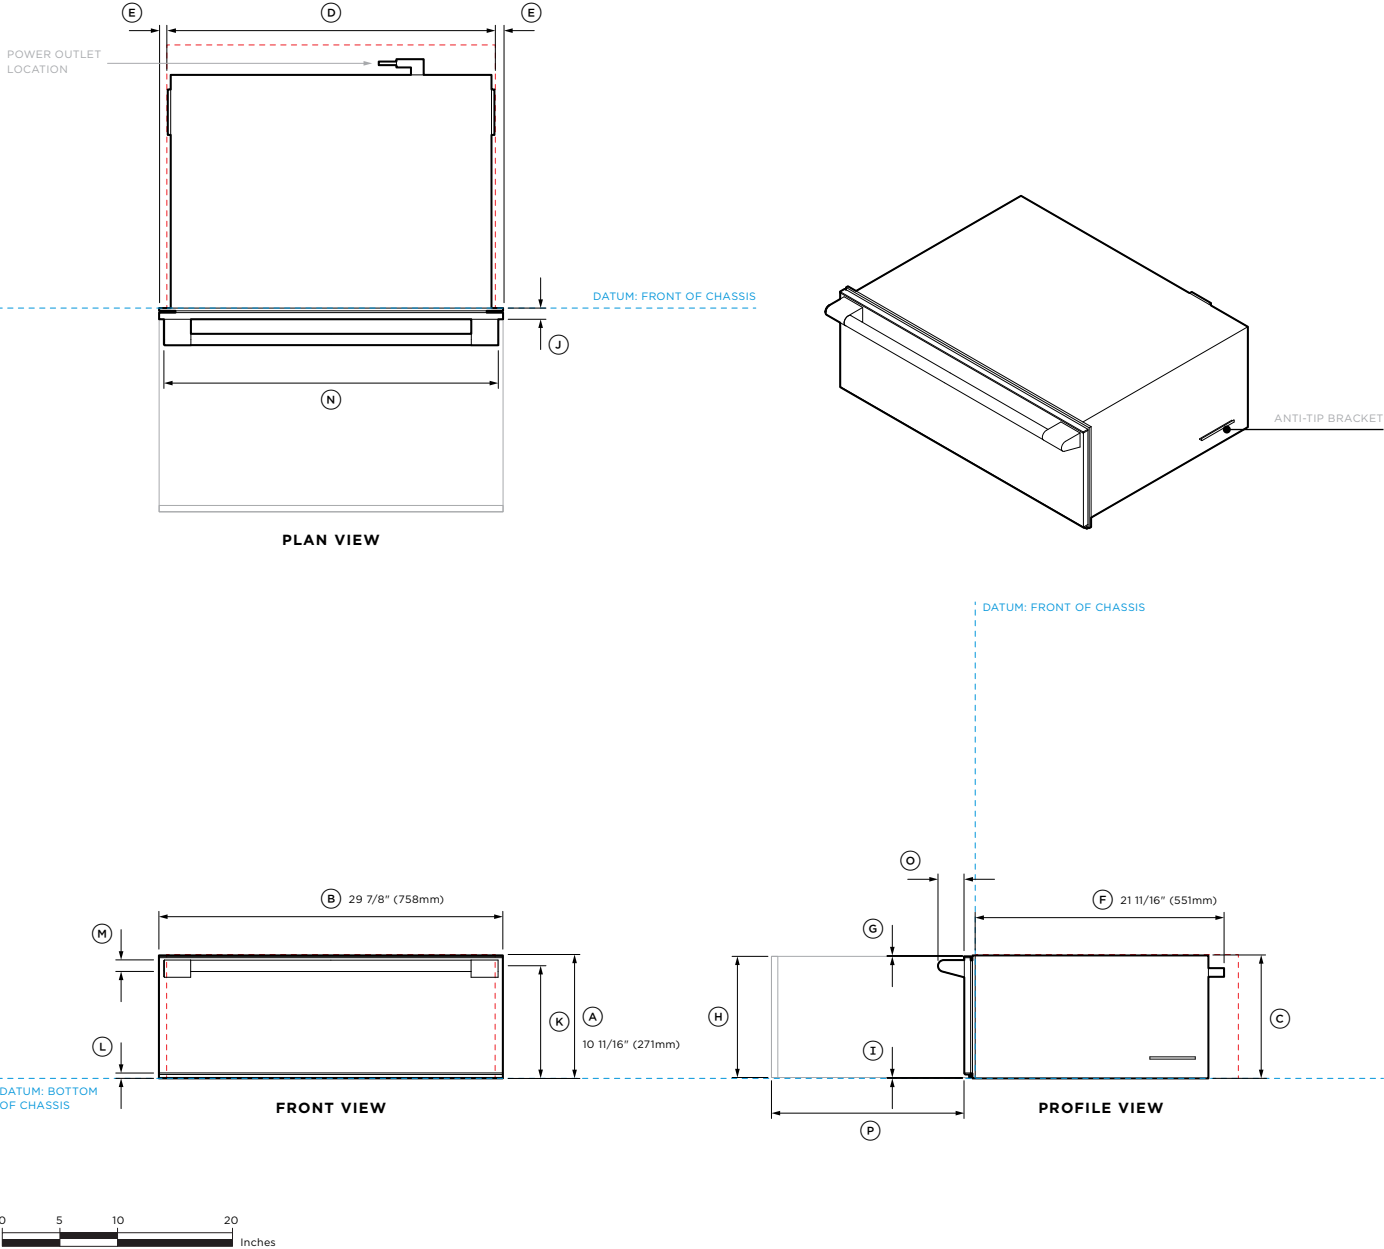

Model no:		
VB30SPEX3 30" Series 9 Professional Vacuum Seal Drawer		
Product Dimensions		
	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Height of chassis	10 11/16	271
(D) Width of chassis*	28 1/2	724
(E) Distance from side of chassis to front panel	11/16	17
(F) Depth of chassis (including power plug)	21 11/16	551
(G) Height from top of front panel to top of chassis	1/16	2
(H) Height of front panel	10 1/2	267
(I) Height from bottom datum to bottom of front panel	1/16	2
(J) Thickness of front panel	15/16	24
(K) Height from bottom datum to centerline of handle rail	9 13/16	249
(L) Visual gap height	1/2	13
(M) Thickness of handle rail	1	25
(N) Width of handle	29	737
(O) Depth of handle	2 9/32	58
(P) Depth of drawer open**	16 7/8	429
*Including anti-tip brackets. **Measured from front of front panel.		
Minimum Clearances		
	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity*	28 1/2	724
Minimum inside depth of cavity**	22 13/16	580
Minimum clearance above products front panel to upper cabinetry front panel or appliance***	5/32	4
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762
*Including anti-tip brackets. **Measured from front of chassis. ***Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		
----- INDICATES PRODUCT DATUM ----- INDICATES CABINETRY CLEARANCES		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com		

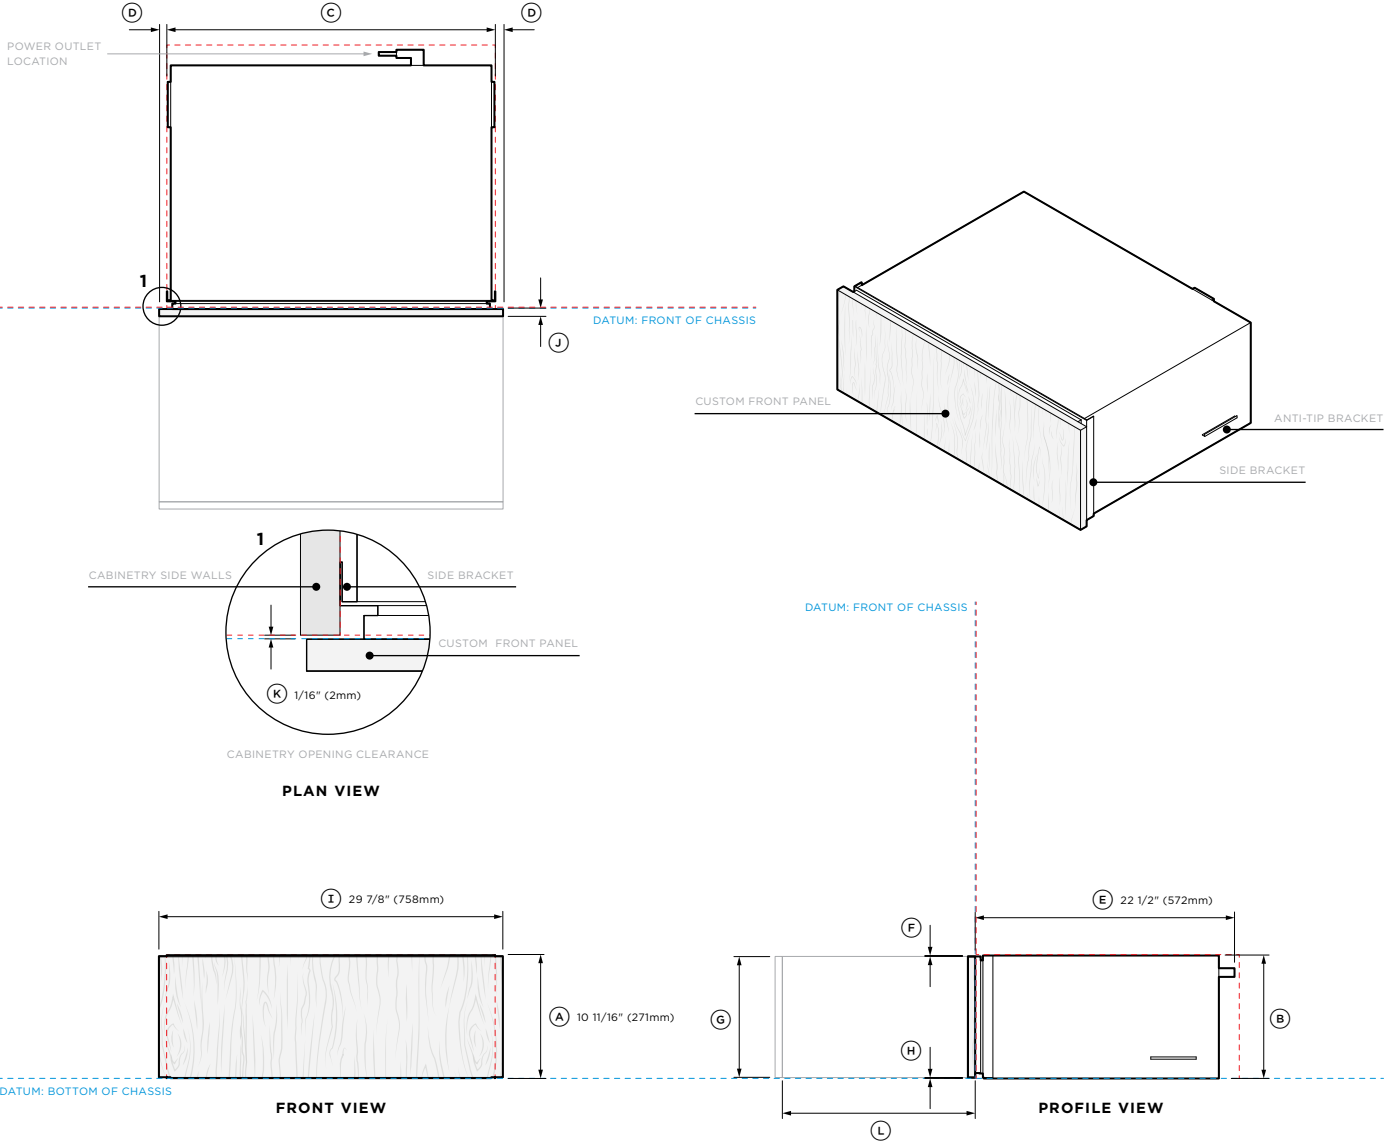

Model no:		
VB30SDEI3 30" Series 9 Integrated Vacuum Seal Drawer		
Product Dimensions		
	inch	mm
(A) Overall height of product	10 11/16	271
(B) Height of chassis	10 11/16	271
(C) Width of chassis (including side bracket)*	28 15/32	723
(D) Distance from side bracket to custom front panel	11/16	17
(E) Depth of chassis (including power plug)	22 1/2	572
(F) Height from top of custom front panel to top of chassis	1/16	2
(G) Height of custom front panel	min 10 1/2	min 267
(H) Height from bottom datum to bottom of custom front panel	1/16	2
(I) Width of custom front panel	min 29 7/8	min 758
(J) Thickness of custom front panel	min 5/8	min 16
(K) Clearance behind custom front panel for push-to-open mechanism**	1/16	2
(L) Depth of drawer open***	16 3/4	425
*Including anti-tip brackets.		
**A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
***Measured from front of chassis.		
Note: Maximum custom front panel weight 11 lb (5kg).		
Minimum Clearances		
	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity*	28 1/2	724
Minimum inside depth of cavity**	22 13/16	580
Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762
*Including anti-tip brackets.		
**Measured from front of chassis.		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		
----- INDICATES PRODUCT DATUM		
----- INDICATES CABINETRY CLEARANCES		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com		

PLANNING CONSIDERATIONS

DIVIDING SHELF

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

BLACK CLASHING



Black clashing is recommended on front facing edges and openings where products are located and on side cabinets if cabinet is rebated.

OVEN CABINETRY TRIM

If using light-colored cabinets, we recommend using black cabinetry trim to help hide the cabinetry beneath the front door panel of the appliance. Ensure the trim height does not interfere with any appliances or cabinetry below. Black cabinetry trim is included with ovens.

LEVEL CABINETRY


Check the shelves are level and the side panels are straight.

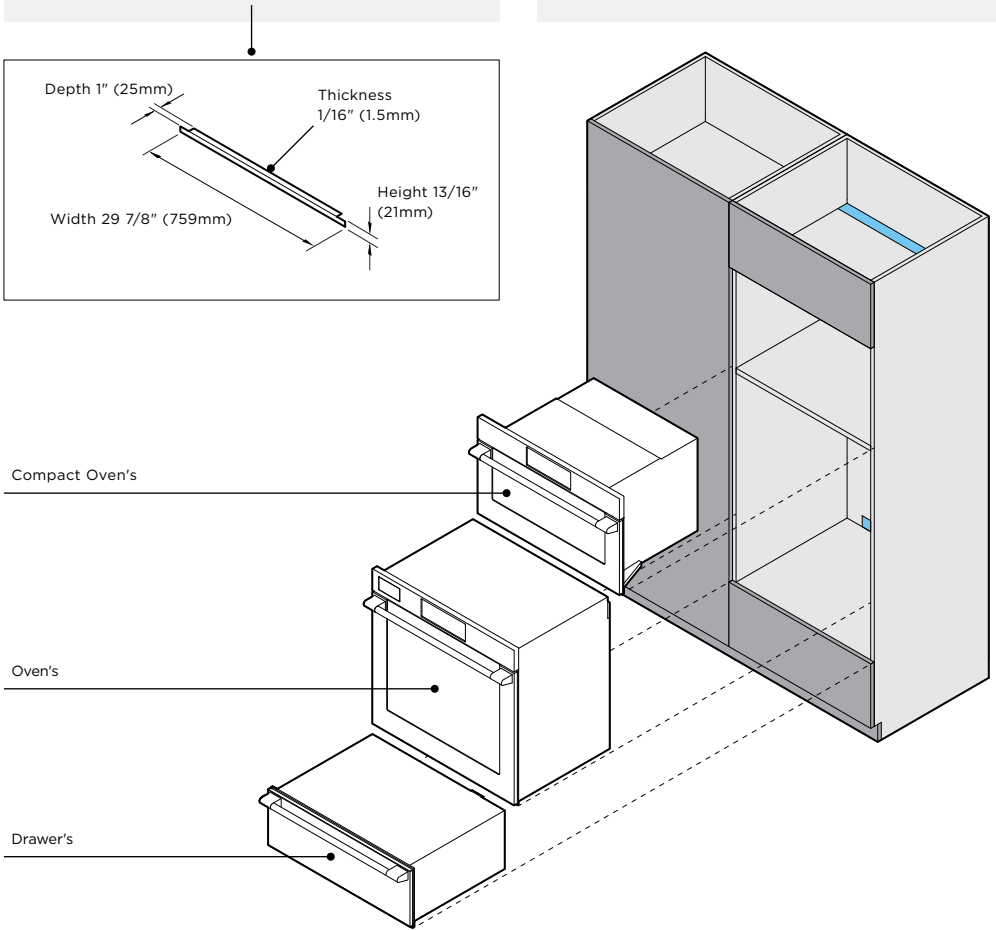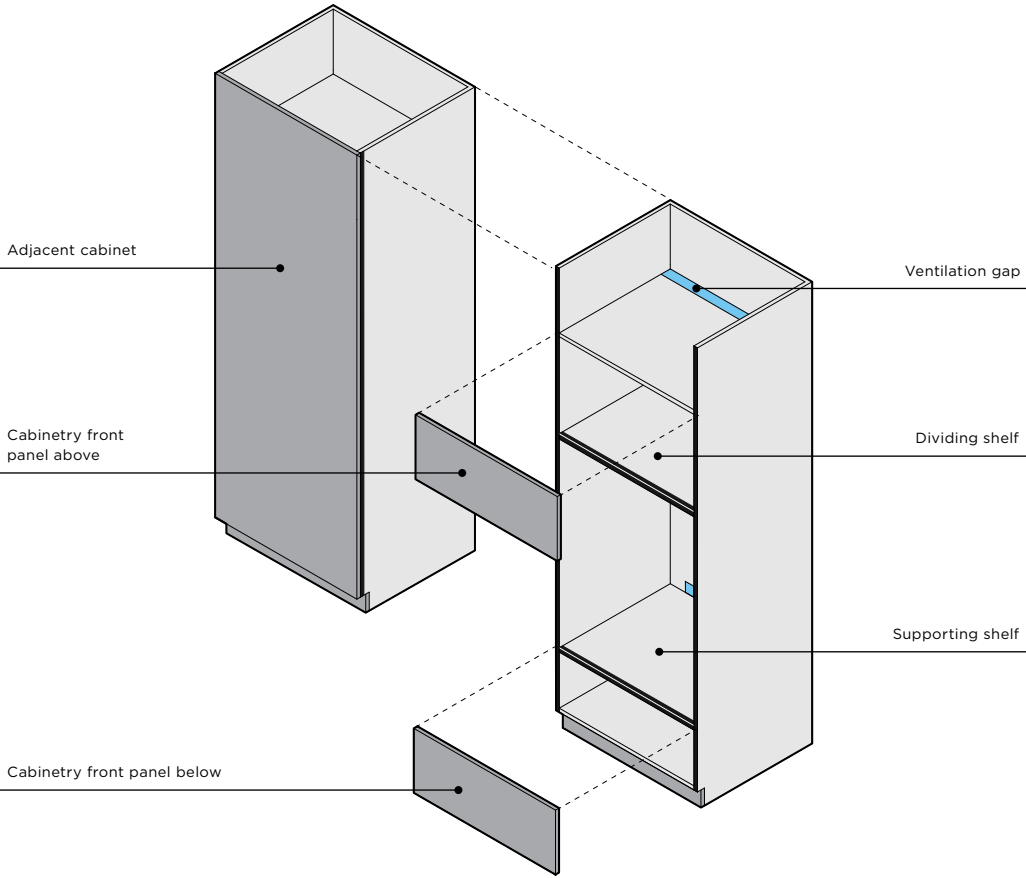

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)


UNDERBENCH

If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

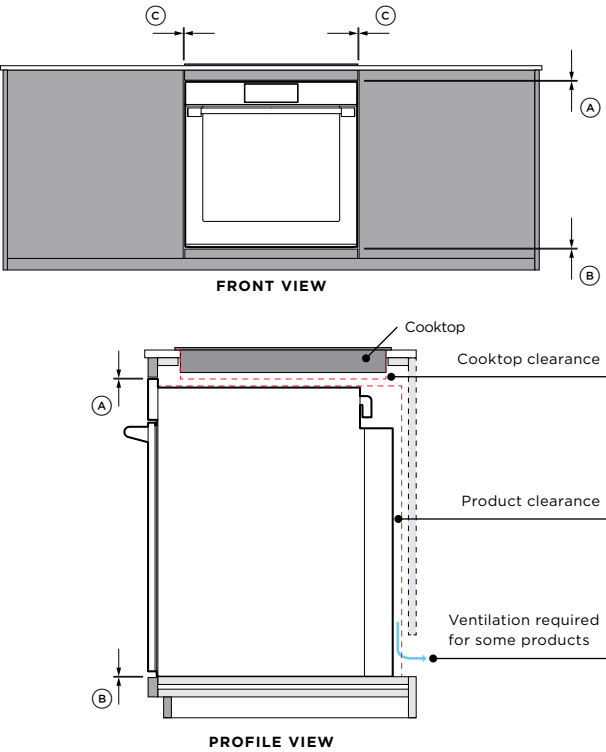


SINGLE INSTALLATION

Head to the individual product 'Cabinetry' section in this Planning Guide for details.

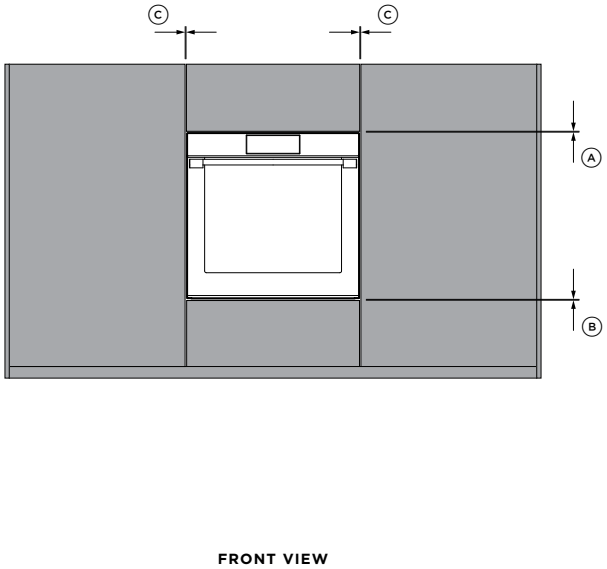

STACKED OR GRID


Head to the 'Stack Height' section in this Planning Guide for details.

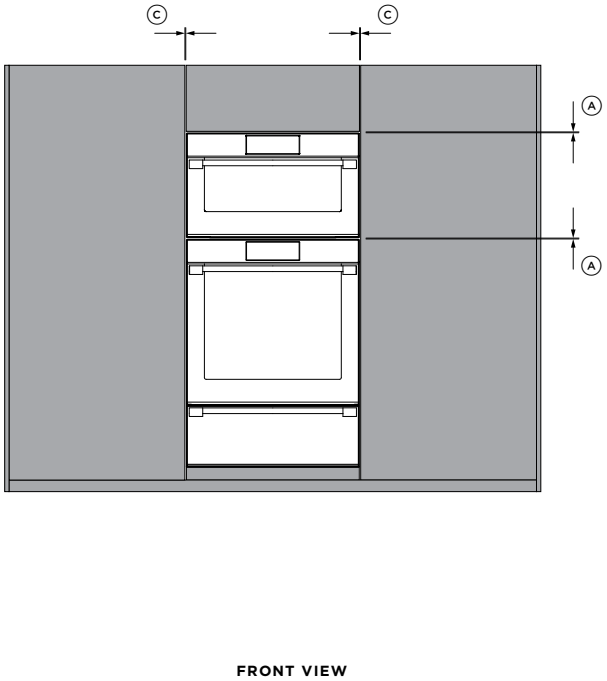

Clearances		inch	mm
(A)	Minimum clearance above product control panel/front panel to upper cabinetry front panel or appliance	1/16	2
(B)	Minimum clearance between bottom of chassis to lower cabinetry front panel or appliance*	1/16	2
(C)	Minimum clearance between adjacent front panel or appliance**	1/16	2

*Only applies to Self-Cleaning Oven, Self-Cleaning Steam Assist Oven and Built-in Coffee Maker.
**Built-in Coffee Maker requires 3/32"(2.5mm) clearance.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

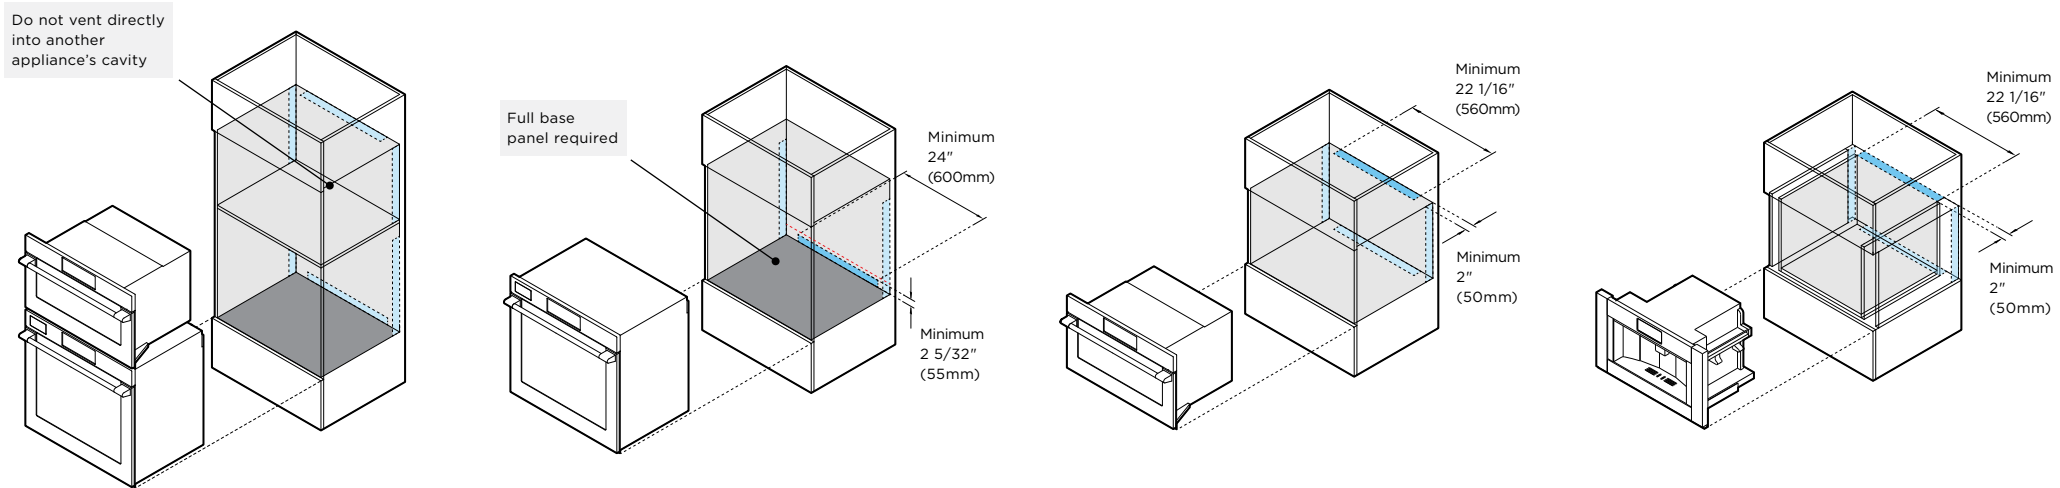

Options for total minimum ventilation area

VENTILATION

Ventilation is required to ensure proper performance of certain products.

Possible Venting Locations:

- Space behind the cabinet
- Upper cavity (not a product cavity)
- Toe kick cavity
- Adjacent cabinetry (not a product cavity)

Cabinet with back panel or installed against a wall:

Select one of the venting locations listed above, providing the required minimum ventilation area.

Cabinet without back panel:

If the cabinet is manufactured without a back panel and is not positioned directly against a wall, the open back will provide sufficient ventilation.

Do not vent directly into another appliance's cavity.

SELF-CLEANING OVEN AND
SELF-CLEANING STEAM ASSIST OVEN

OB30SPPUX3, OB30SPPSUX3

VENTILATION PLACEMENT

	51in ² (330cm ²)
	or
Total minimum ventilation area	2 5/32" x 24" (55mm x 600mm)

Cavity venting options*	sides or back
-------------------------	---------------

*If positioned at the back, it should be located no more than 3 5/32" (80mm) above the bottom of the chassis datum.

Note: Full base panel required for product to operate correctly. Venting can not be through the base panel.

COMPACT CONVECTION-SPEED OVEN

OM30NPUX3

VENTILATION PLACEMENT

	43.4in ² (280cm ²)
	or
Total minimum ventilation area	2" x 22 1/16" (50mm x 560mm)

Cavity venting options	base, sides or top
------------------------	--------------------

BUILT-IN COFFEE MAKER

EB30PSX1

VENTILATION PLACEMENT

	43.4in ² (280cm ²)
	or
Total minimum ventilation area	2" x 22 1/16" (50mm x 560mm)

Cavity venting options	base, sides or top
------------------------	--------------------

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

STACK HEIGHT

Stack height is overall product height with minimum clearance above appliance control panel or front panel.

(A) Overall product height


+

(B) Minimum clearance above appliance control panel or front panel to upper appliance

=


(C) Stacked Height

1



(B)

PROFILE VIEW

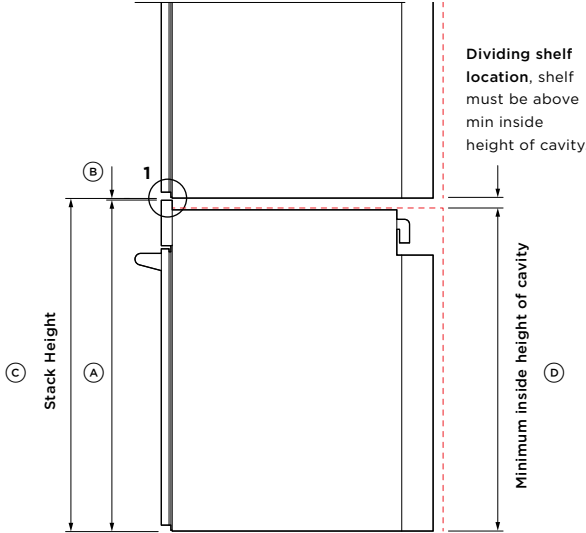

Stack Height

Dividing shelf location, shelf must be above min inside height of cavity.

Minimum inside height of cavity

PROFILE VIEW


Ventilation air vent is required at rear of cabinetry for some products.

Dividing shelves are required to support stacked appliances and to achieve correct clearance.

Dividing shelves must be constructed from material that will support the weight of the appliances. Ensure the oven is not bearing any weight from cabinetry or products installed above.

Drawers can fully support a 30inch Fisher & Paykel oven, without adding a shelf in between.


EXAMPLE

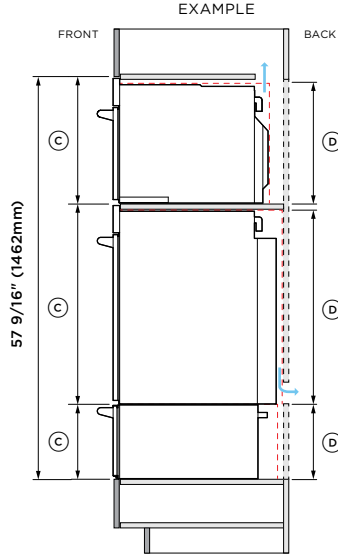

57 9/16" (1462mm)

PROFILE VIEW

MINIMUM INSIDE HEIGHT OF CAVITY

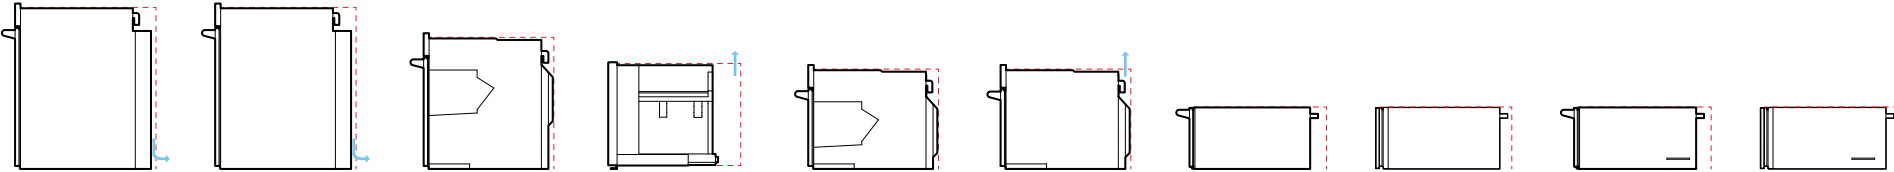

	SELF-CLEANING OVEN OB30SPPUX3		SELF-CLEANING STEAM ASSIST OVEN OB30SPPSUX3		COMBI-STEAM OVEN OS30SPUX3		BUILT-IN COFFEE MAKER EB30PSX1		COMPACT COMBI-STEAM OVEN OS30NPUX3		COMPACT CONVECTION-SPEED OVEN OM30NPUX3		WARMING DRAWER WB30SPEX3		INTEGRATED WARMING DRAWER WB30SDEI3		VACUUM SEAL DRAWER VB30SPEX3		INTEGRATED VACUUM SEAL DRAWER VB30SDEI3	
DIMENSIONS	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
(A) Overall product height	28 11/16	729	28 11/16	729	23 9/16	598	18 1/2	470	18	458	18	458	10 11/16	271	10 11/16	271	10 11/16	271	10 11/16	271
(B) Minimum clearance above	1/16	2	1/16	2	1/16	2	1/16	2	1/16	2	1/16	2	-	-	-	-	-	-	-	-
(C) Stack height	28 3/4	731	28 3/4	731	24	600	18 9/16	472	18 1/8	460	18 1/8	460	10 11/16*	271*	10 11/16*	271*	10 11/16*	271*	10 11/16*	271*
(D) Minimum inside height of cavity	28 1/32	712	28 1/32	712	22 13/16	580	17 3/4**	450**	17 5/16	440	17 5/16	440	-	-	-	-	-	-	-	-

*Drawers can fully support 30inch Fisher & Paykel wall oven, without adding shelf in between. **Not including additional panel of 5/8" (16mm).
Note: Single installation of Drawers require minimum clearance above, head to individual product 'Cabinetry' section's of this Planning Guide for more details.

FISHER & PAYKEL

90004607B

PLANNING GUIDE 30" OVENS AND COMPANIONS VERSION B - OCTOBER 2025

© FISHER & PAYKEL APPLIANCES LIMITED 2025

PAGE 39

Model no:
OB30SPPUX3 30" Series 9 Professional Self-Cleaning Oven

Product Dimensions	inch	mm
(A) Overall height of product	28 11/16	729
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel (excludes handle)	15/16	24


Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	28 3/4	731
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	28 1/32	712
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	23 1/2	597
(I) Thickness of cabinetry front panel	min 5/8	min 16
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Note: Cabinetry requires a full base panel.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2
(L) Minimum clearance between bottom of chassis to lower cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

PROFILE VIEW

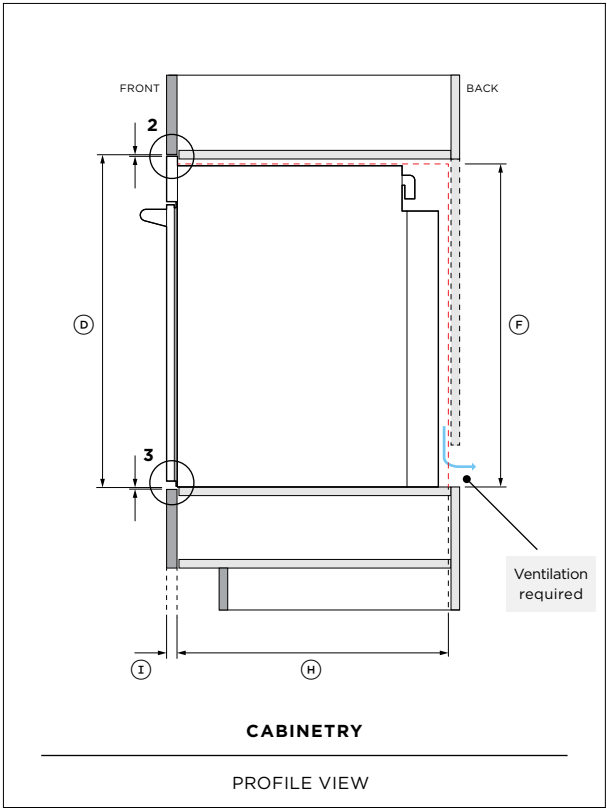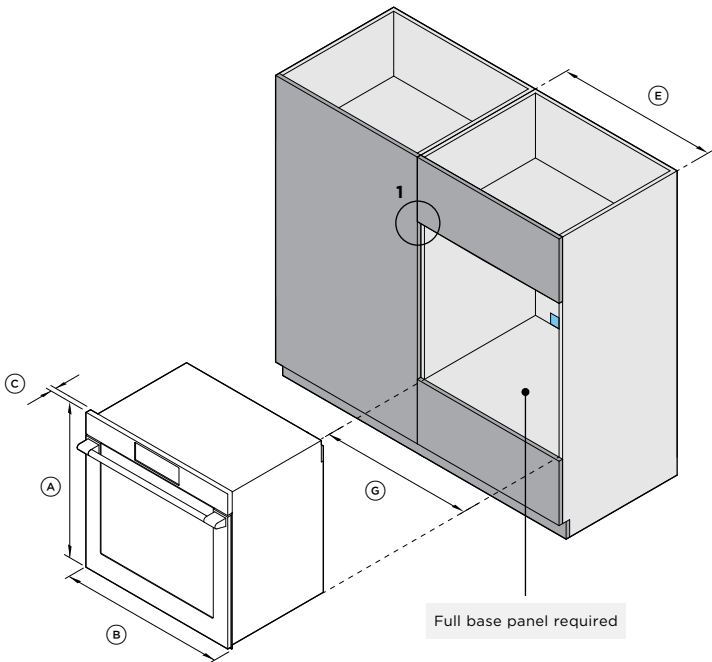

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:
OB30SPPSUX3 30" Series 11 Professional Self-Cleaning Steam Assist Oven

Product Dimensions	inch	mm
A Overall height of product	28 11/16	729
B Overall width of product	29 7/8	758
C Thickness of control panel (excludes handle)	15/16	24


Cabinetry Dimensions	inch	mm
D Recommended cabinet height/stack height	28 3/4	731
E Recommended cabinet width	30	762
F Minimum inside height of cavity	28 1/32	712
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	23 1/2	597
I Thickness of cabinetry front panel	min 5/8	min 16
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Note: Cabinetry requires a full base panel.

Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2
L Minimum clearance between bottom of chassis to lower cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

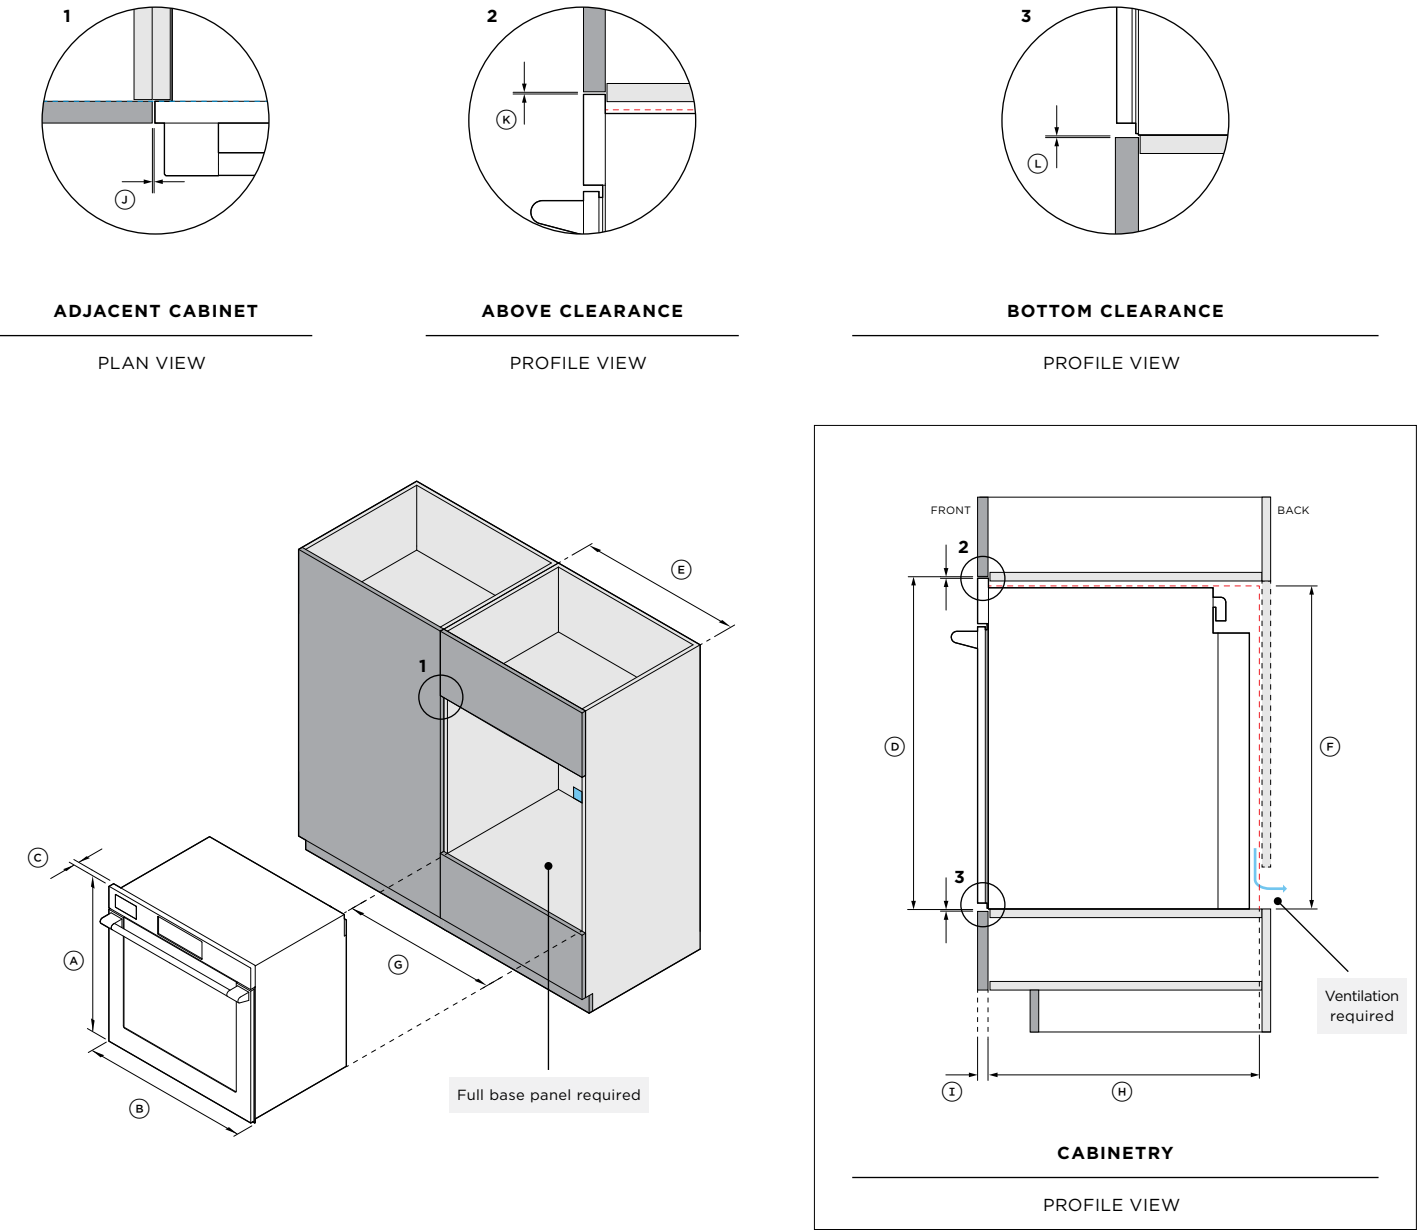

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:
OS30SPUX3 30" Series 11 Professional Combi-Steam Oven


Product Dimensions	inch	mm
(A) Overall height of product	23 9/16	598
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel (excludes handle)	15/16	24

Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	24	600
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	22 13/16	580
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	21 5/8	550
(I) Thickness of cabinetry front panel	min 5/8	min 16

*Measured from front of chassis.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

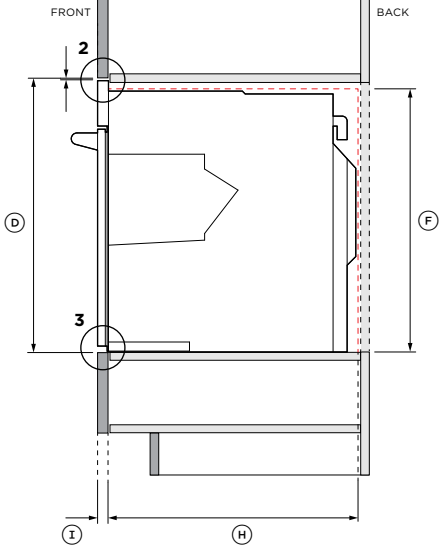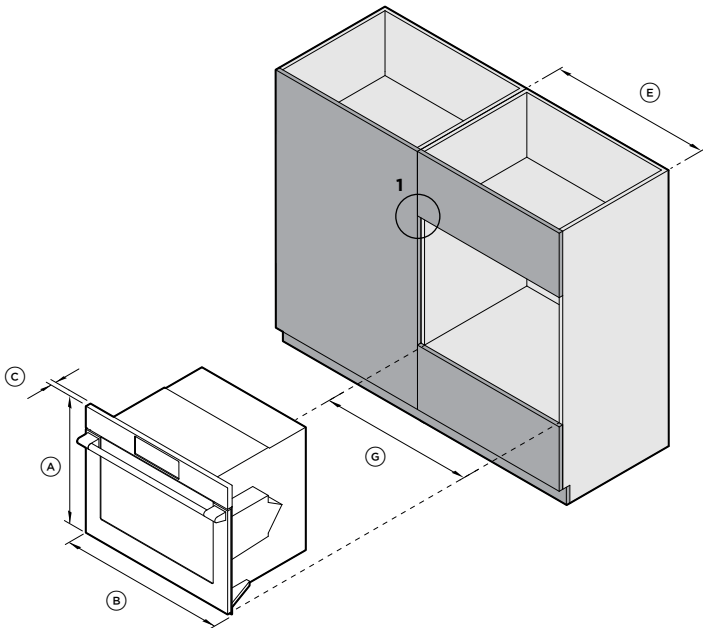

CABINETRY

PROFILE VIEW


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:
EB30PSX1 30" Series 9 Professional Built-in Coffee Maker

Product Dimensions	inch	mm
(A) Overall height of product	18 1/2	470
(B) Overall width of product	29 13/16	757
(C) Thickness of control panel	1 9/16	40
(D) Height from bottom of chassis to bottom of lower trim	9/16	15
Cabinetry Dimensions	inch	mm
(E) Recommended cabinet height		
- standalone installation*	18 5/8	473
- stack height	18 9/16	472
(F) Recommended cabinet width	30	762
(G) Minimum inside height of cavity*	17 3/4	450
(H) Minimum inside width of cavity	22 1/16	560
(I) Minimum inside depth of cavity**	22 13/16	545
(J) Thickness of cabinetry front panel	min 5/8	min 16
Rear ventilation height***	2	50
Rear ventilation width***	22 1/16	560

*Additional panel of 5/8" (16mm) required at the base of the cavity for under bottom of chassis for standalone installation only.
**Measured from front of chassis.
***A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Cabinetry clearances	inch	mm
(K) Minimum clearance between adjacent front panel or appliance	3/32	2.5
(L) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2
(M) Minimum clearance between bottom of lower trim to lower cabinetry front panel or appliance		
- standalone installation	1/8	3
- stack height	1/16	2

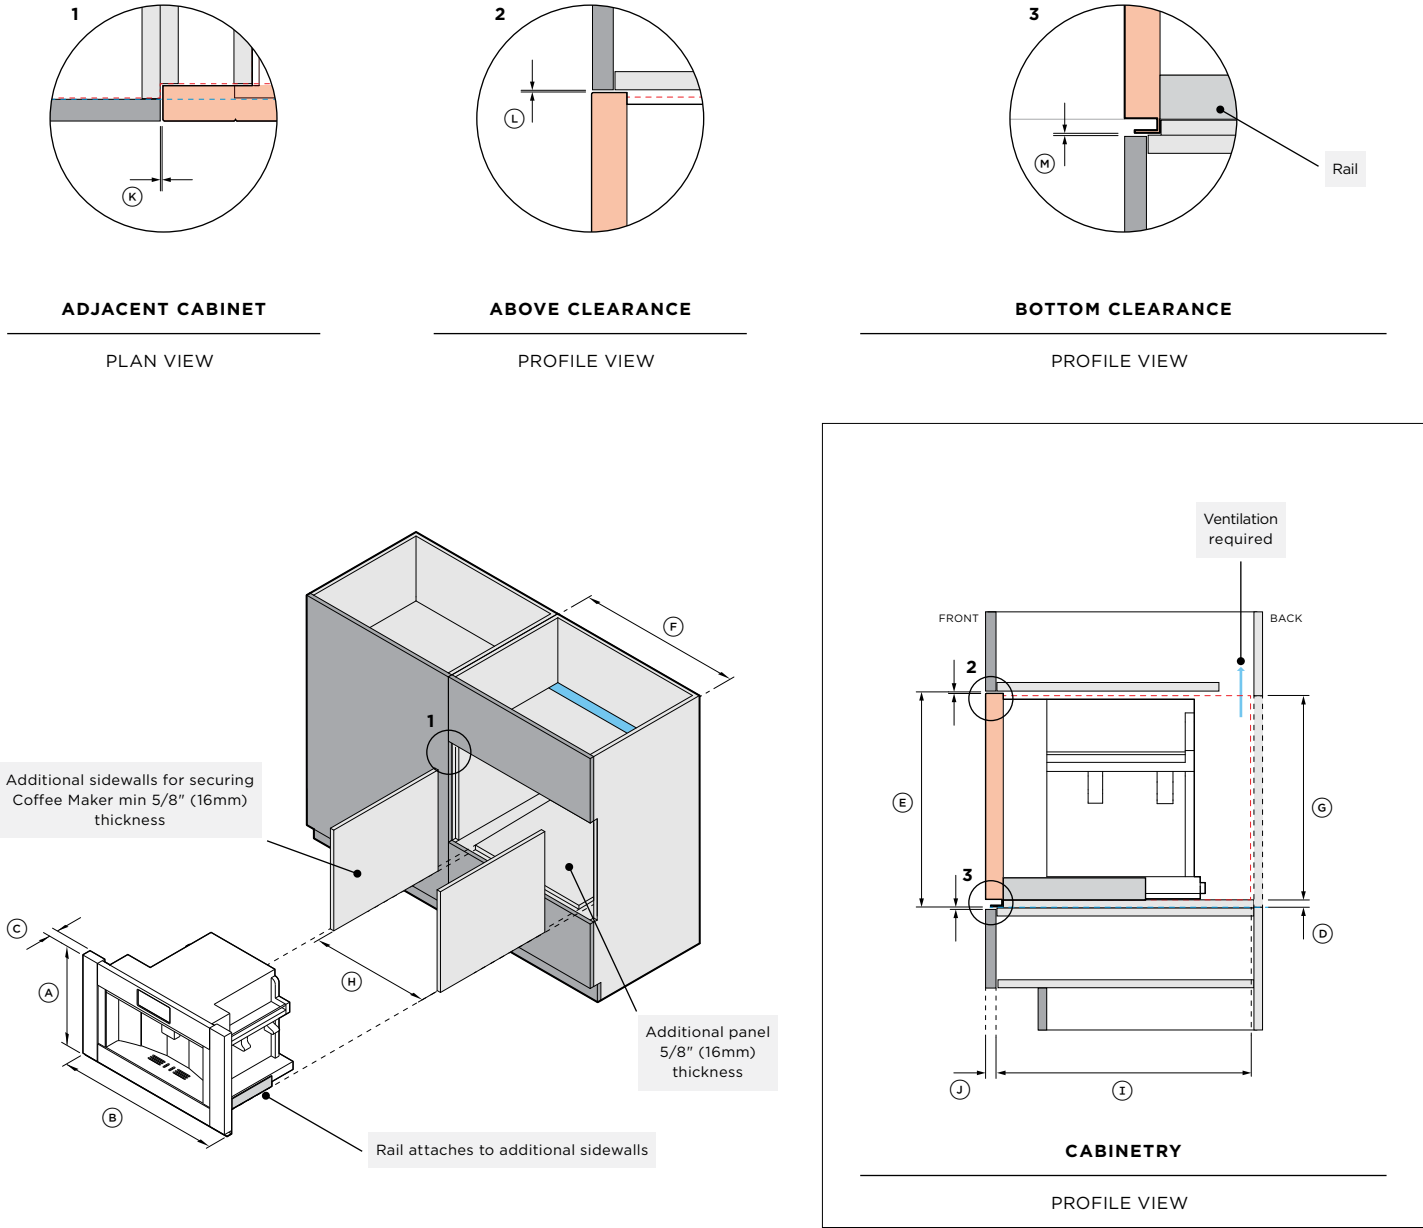

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:		
EB30PSX1	30" Series 9 Professional Built-in Coffee Maker	
OS30NPUX3	30" Series 9 Professional Compact Combi-Steam Oven	

Product Dimensions	inch	mm
A Overall height of products		
	- Built-in Coffee Maker	18 1/2 470
	- Compact Combi-Steam Oven	18 458
B Overall width of product		
	- Built-in Coffee Maker	29 13/16 757
	- Compact Combi-Steam Oven	29 7/8 758


C Thickness of control panel		
	- Built-in Coffee Maker	1 9/16 40
	- Compact Combi-Steam Oven	15/16 24
D Height from bottom of chassis to bottom of lower trim (Built-in Coffee Maker)		
		9/16 15

Cabinetry Dimensions		inch	mm
E	Recommended cabinet height/stack height	36 11/16	932
F	Recommended cabinet width	30	762
G	Minimum inside height of cavity		
	- Built-in Coffee Maker	17 3/4	450
	- Compact Combi-Steam Oven	17 5/16	440
H	Minimum inside width of cavity		
	- Built-in Coffee Maker	22 1/16	560
	- Compact Combi-Steam Oven	28 1/2	724


I Minimum inside depth of cavity*		
	- Built-in Coffee Maker	22 13/16 545
	- Compact Combi-Steam Oven	21 5/8 550
J Thickness of cabinetry front panel	min 5/8 min 16	
Rear ventilation height (Built-in Coffee Maker)**	2 50	
Rear ventilation width (Built-in Coffee Maker)**	22 1/16 560	

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.


Cabinetry clearances	inch	mm
K Minimum clearance above product control panel to upper cabinetry front panel or appliance		
		1/16 2
Minimum clearance between adjacent front panel or appliance		
	- Built-in Coffee Maker	3/32 2.5
	- Compact Combi-Steam Oven	1/16 2



ABOVE CLEARANCE





LOWER TRIM STEPDOWN



BOTTOM CLEARANCE

Compact Combi-Steam Oven requires no clearance as door swings into product height

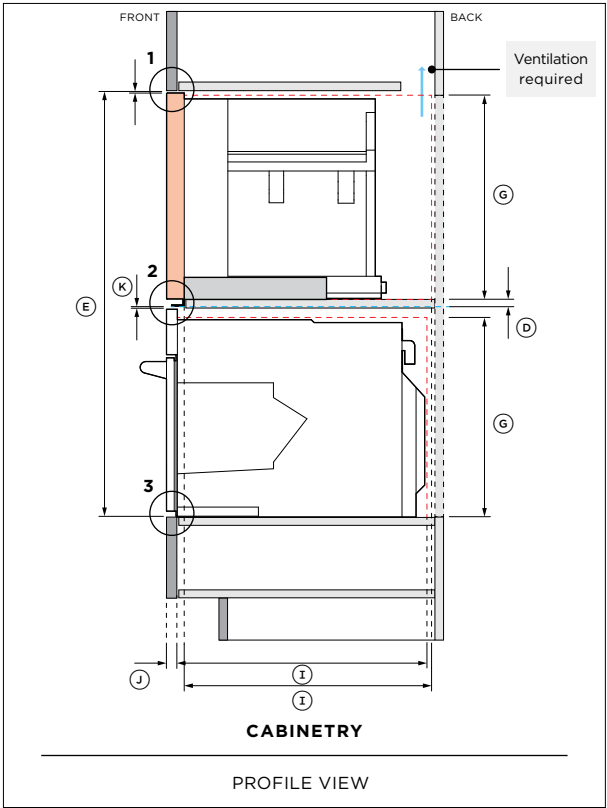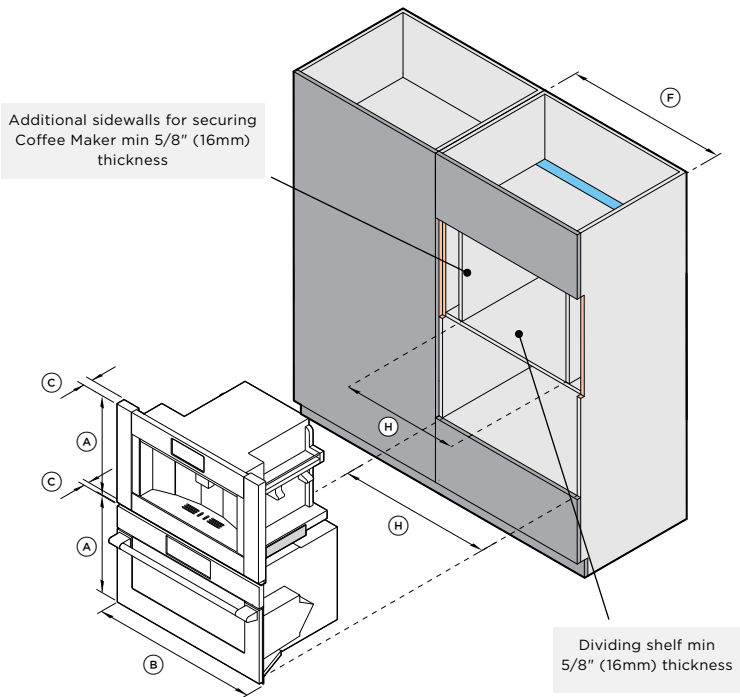

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
OS30NPUX3	30" Series 9 Professional Compact Combi-Steam Oven	


Product Dimensions	inch	mm
A Overall height of product	18	458
B Overall width of product	29 7/8	758
C Thickness of control panel (excludes handle)	15/16	24

Cabinetry Dimensions	inch	mm
D Recommended cabinet height/stack height	18 1/8	460
E Recommended cabinet width	30	762
F Minimum inside height of cavity	17 5/16	440
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	21 5/8	550
I Thickness of cabinetry front panel	min 5/8	min 16

*Measured from front of chassis.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

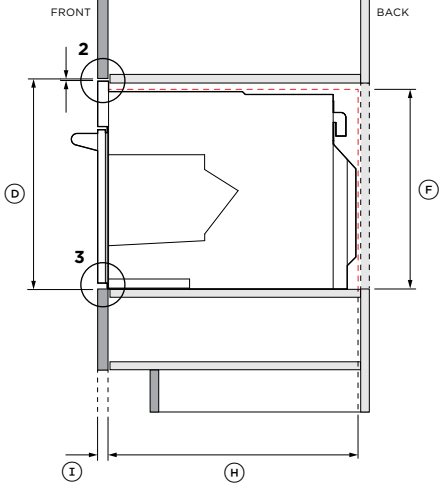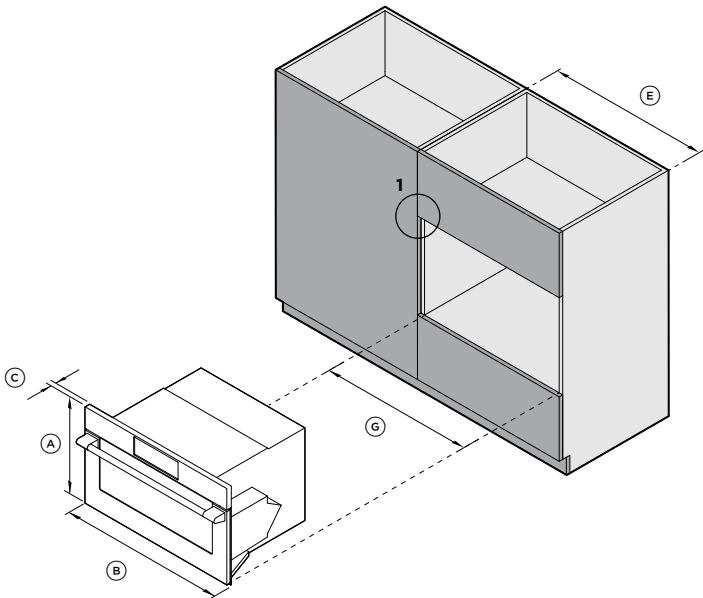

CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:		
OM30NPUX3 30" Series 9 Professional Compact Convection-Speed Oven		


Product Dimensions	inch	mm
A Overall height of product	18	458
B Overall width of product	29 7/8	758
C Thickness of control panel (excludes handle)	15/16	24

Cabinetry Dimensions	inch	mm
D Recommended cabinet height/stack height	18 1/8	460
E Recommended cabinet width	30	762
F Minimum inside height of cavity	17 5/16	440
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	21 5/8	550
I Thickness of cabinetry front panel	min 5/8	min 16
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

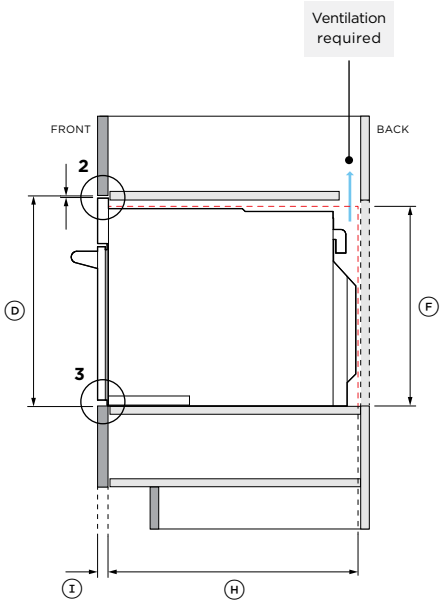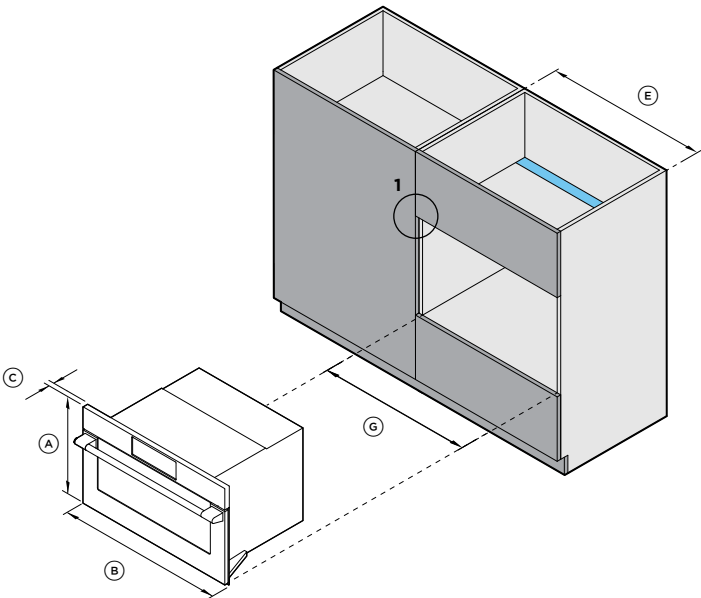

CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:
WB30SPEX3 30" Series 9 Professional Warming Drawer

Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of front panel	15/16	24

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.


Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	22 13/16	580
(I) Thickness of cabinetry front panel	min 5/8	min 16

*Measured from front of chassis.

Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above products front panel to upper cabinetry front panel or appliance*	5/32	4


*Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance

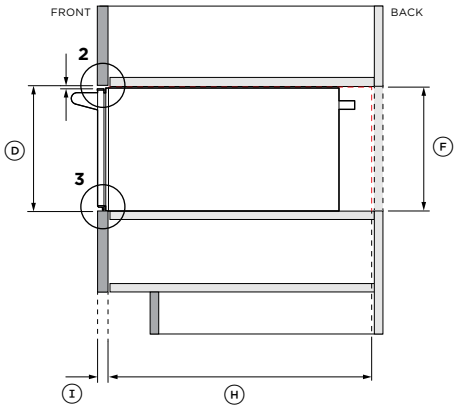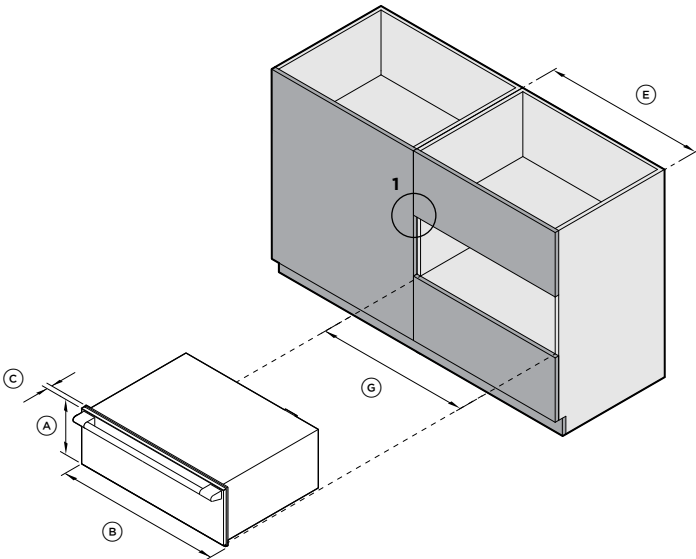

CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:
WB30SDEI3 30" Series 9 Integrated Warming Drawer

Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of custom front panel	min 5/8	min 16

Note: Maximum custom front panel weight 11 lb (5kg).


Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	22 13/16	580
(I) Thickness of cabinetry front panel	min 5/8	min 16

*Measured from front of chassis.

Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Clearance behind custom front panel for push-to-open mechanism*	1/16	2
(L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2

*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

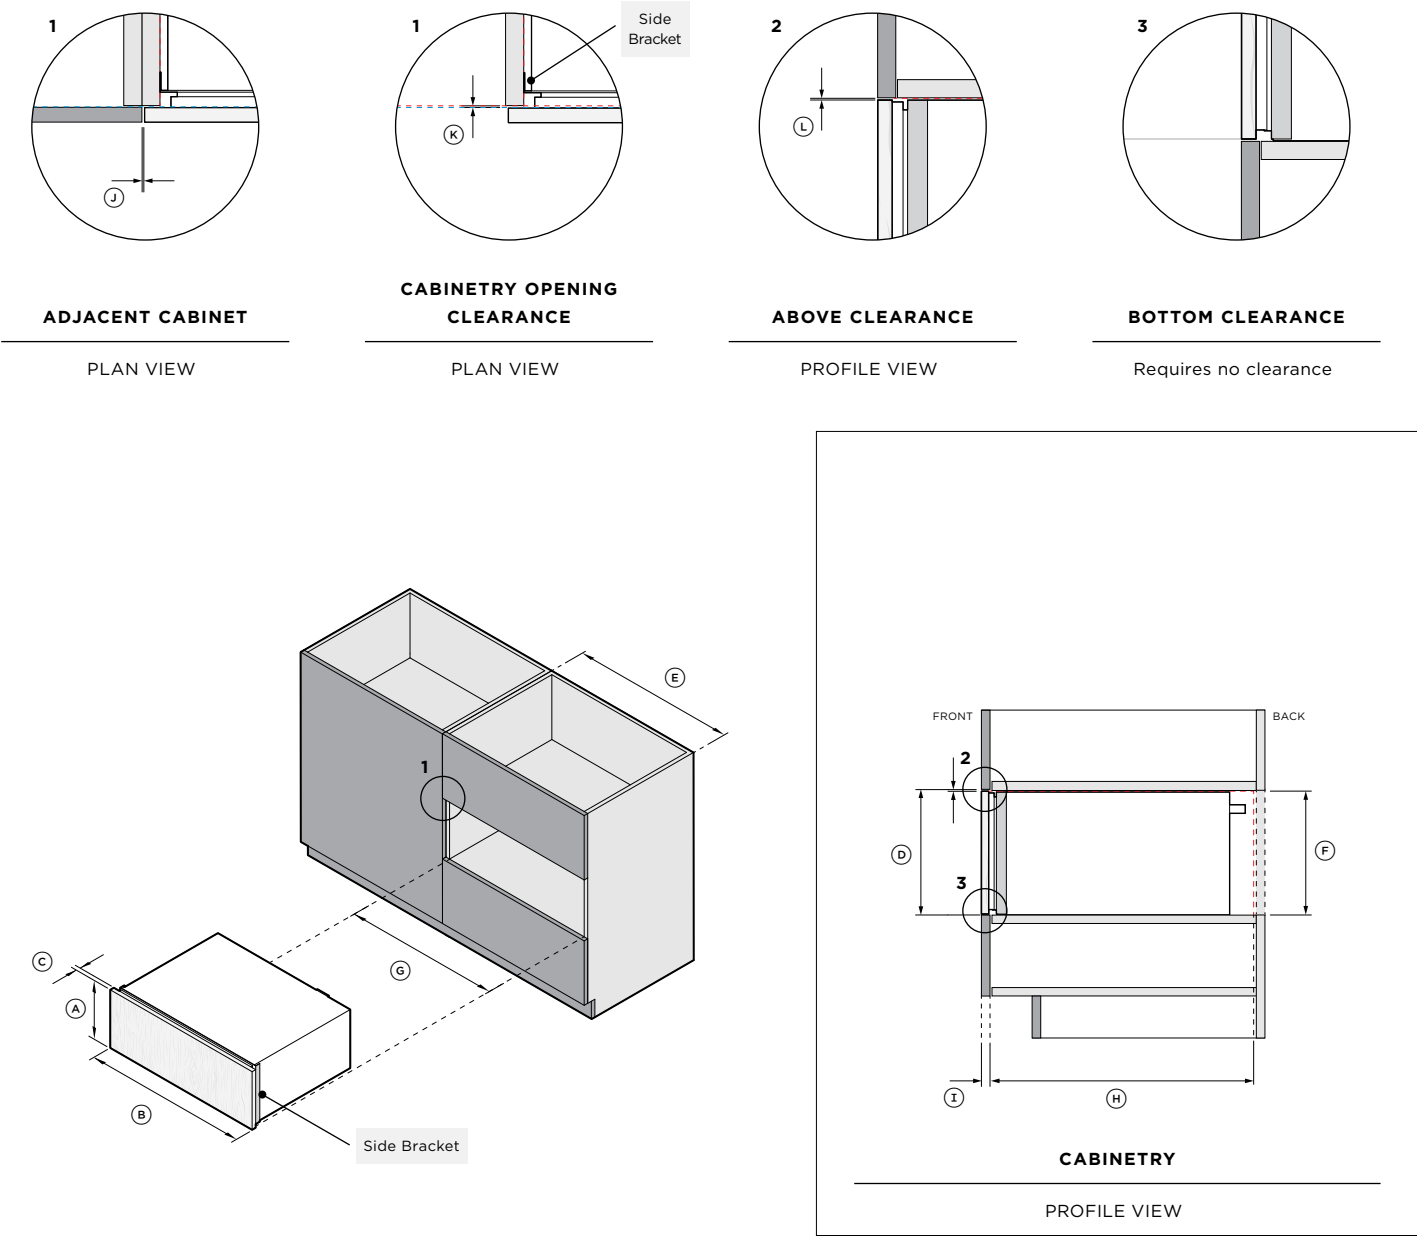

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:
VB30SPEX3 30" Series 9 Professional Vacuum Seal Drawer


Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of front panel	15/16	24

Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity*	28 1/2	724
(H) Minimum inside depth of cavity**	22 13/16	580
(I) Thickness of cabinetry front panel	min 5/8	min 16

*Including anti-tip brackets.
**Measured from front of chassis.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above products front panel to upper cabinetry front panel or appliance*	5/32	4

*Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance

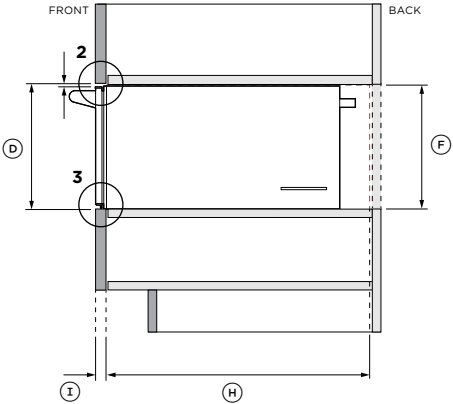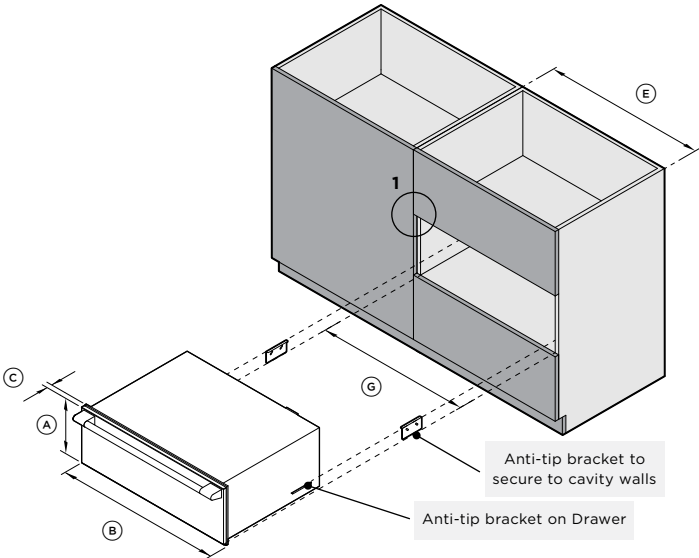


CABINETRY

PROFILE VIEW


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
VB30SDEI3 30" Series 9 Integrated Vacuum Seal Drawer		
Product Dimensions		
	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of custom front panel	min 5/8	min 16
Note: Maximum custom front panel weight 11 lb (5kg).		
Cabinetry Dimensions		
	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity*	28 1/2	724
(H) Minimum inside depth of cavity**	22 13/16	580
(I) Thickness of cabinetry front panel	min 5/8	min 16
*Including anti-tip brackets.		
**Measured from front of chassis.		
Cabinetry clearances		
	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Clearance behind custom front panel for push-to-open mechanism*	1/16	2
(L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		

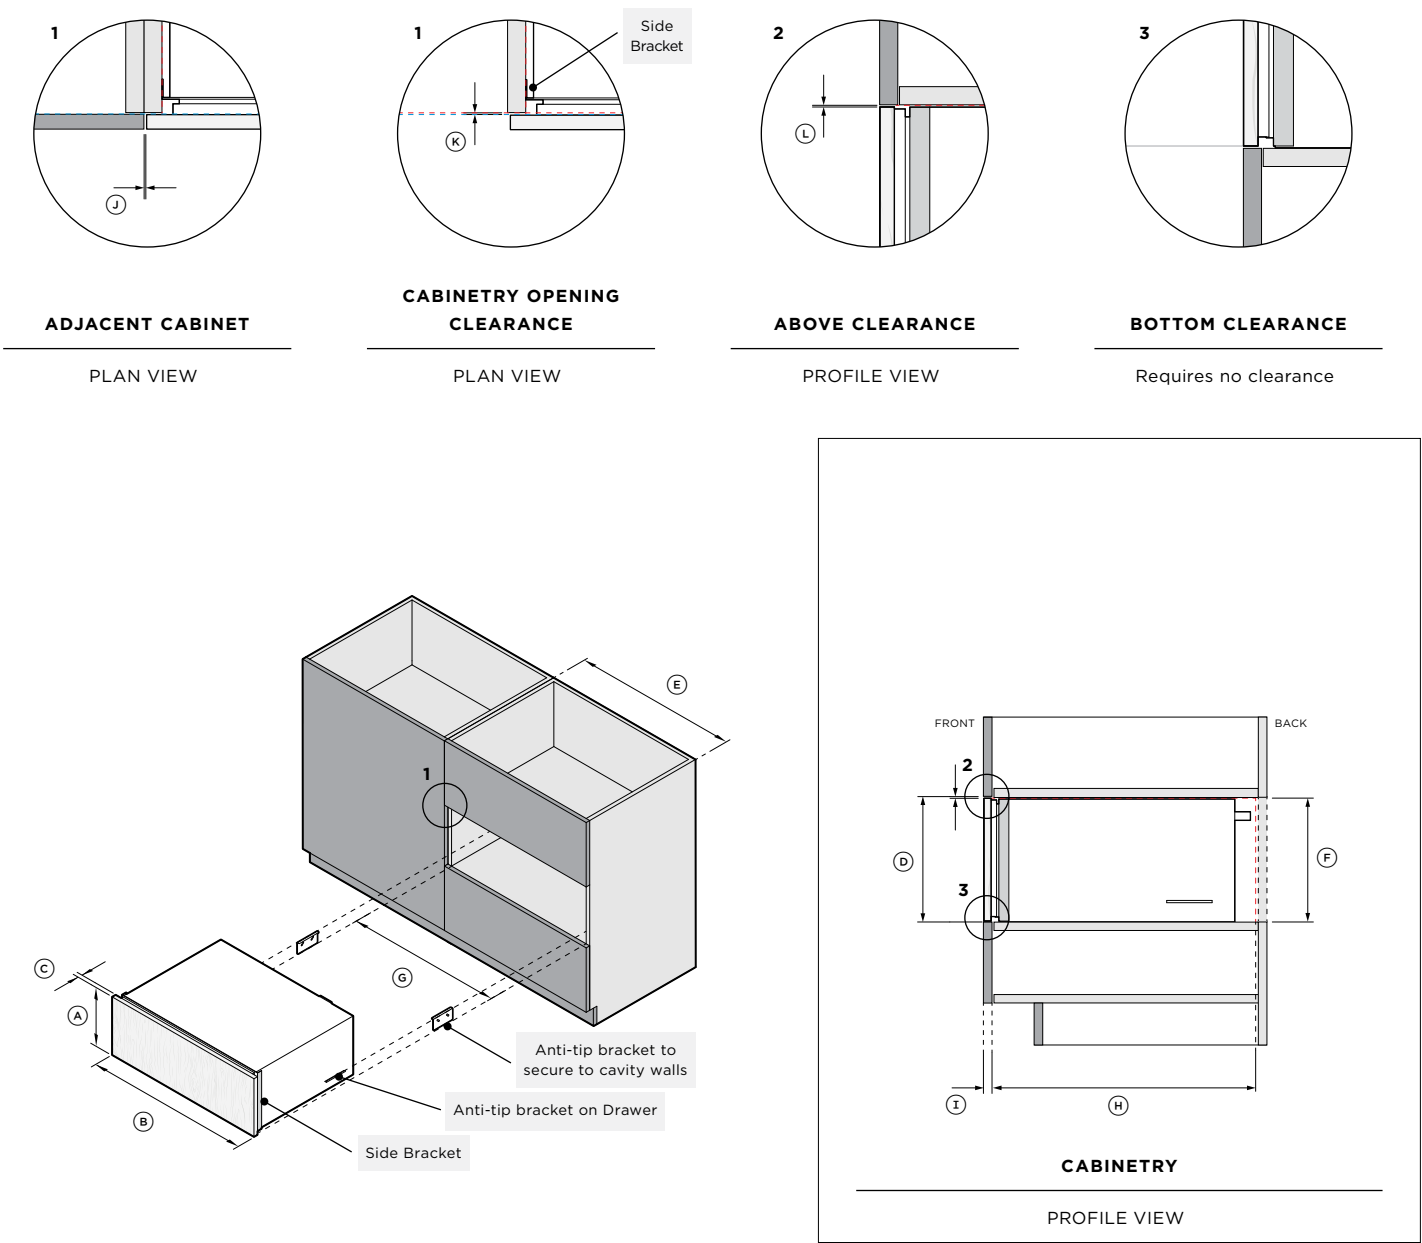

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SERVICES

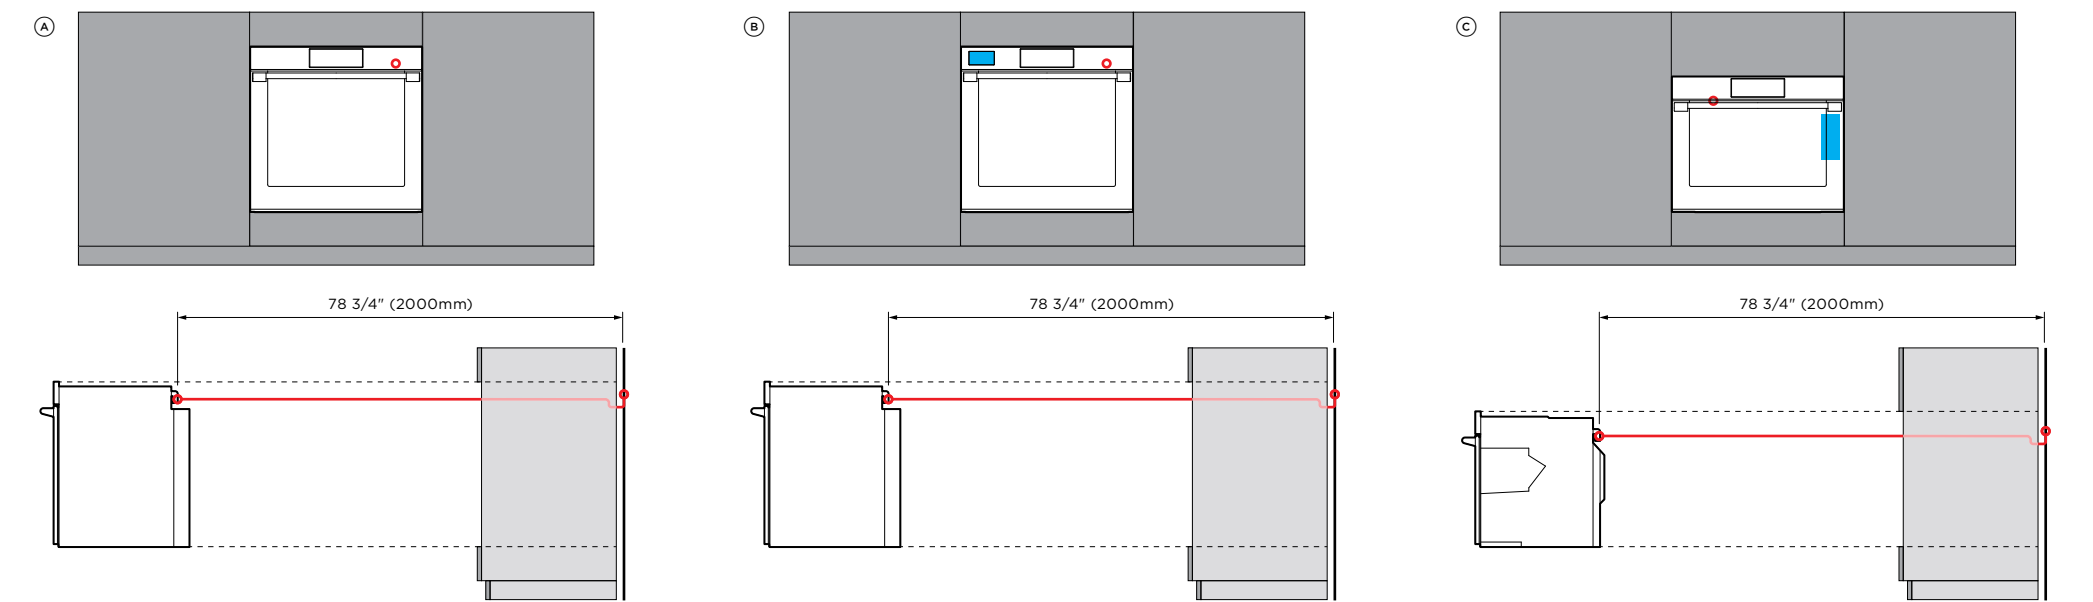

POWER CABLE 


WATER TANK 

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

	(A) SELF-CLEANING OVEN OB30SPPUX3	(B) SELF-CLEANING STEAM ASSIST OVEN OB30SPPSUX3	(C) COMBI-STEAM OVEN OS30SPUX3
POWER CORD			
Maximum power cord length*	78 3/4" (2000mm)	78 3/4" (2000mm)	78 3/4" (2000mm)
Location	Upper right	Upper right	Upper Left
Connection**	Hard wired	Hard wired	Hard wired
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide.			
ELECTRICAL			
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz
Service	20 A	20 A	20 A
Note: Multiple product installation requires the design of power outlets according to local regulations.			
CAPACITY			
Total oven capacity	4.9cu ft (137L)	4.9cu ft (137L)	3cu ft (85L)
Total water tank capacity	-	22.65fl oz (0.67L)	47.3fl oz (1.4L)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

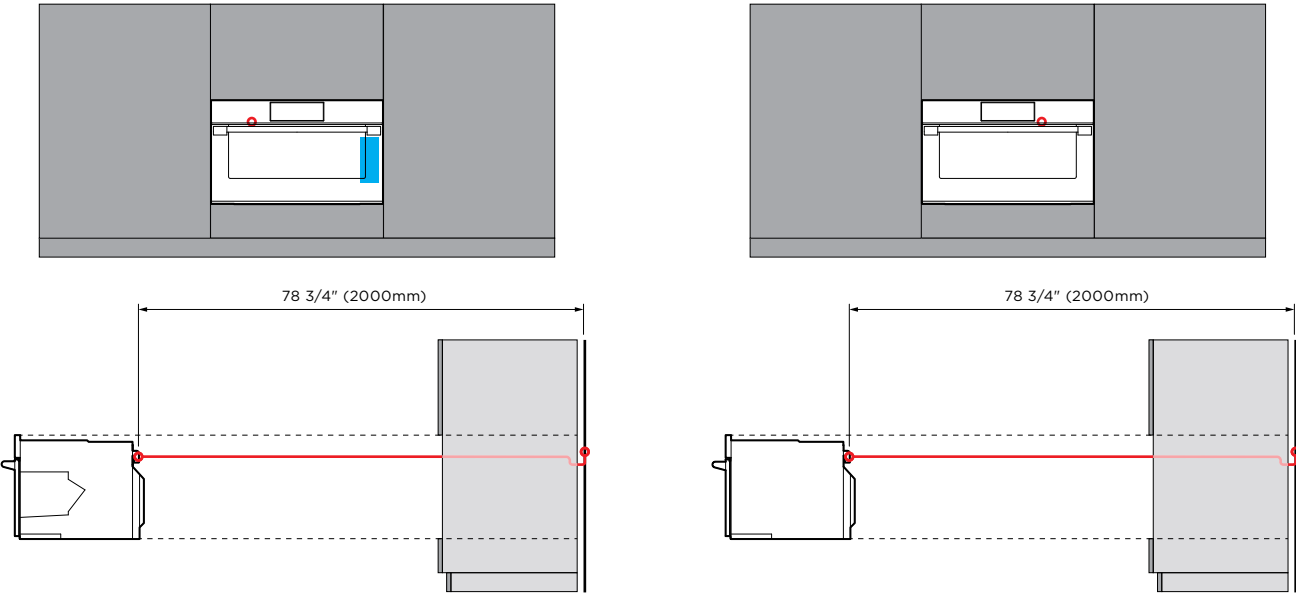




POWER CABLE

WATER TANK

POWER CORD
Maximum power cord length*
Location
Connection**
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide.
ELECTRICAL
Supply
Service
Note: Multiple product installation requires the design of power outlets according to local regulations.
CAPACITY
Total oven capacity
Total water tank capacity

COMPACT COMBI-STEAM OVEN OS30NPUX3	COMPACT CONVECTION-SPEED OVEN OM30NPUX3
78 3/4" (2000mm)	78 3/4" (2000mm)
Upper Left	Upper right
Hard wired	Hard wired
208 or 240 V, 60 Hz	208 or 240 V, 60 Hz
20 A	20 A
1.9cu ft (55L)	1.7cu ft (49L)
47.3fl oz (1.4L)	-

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)

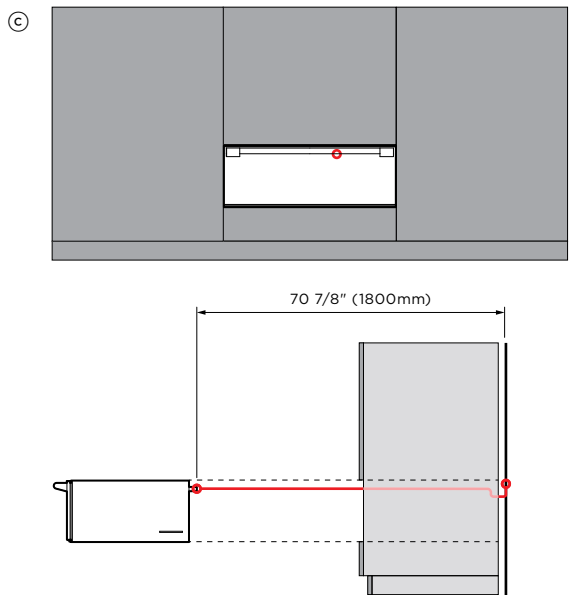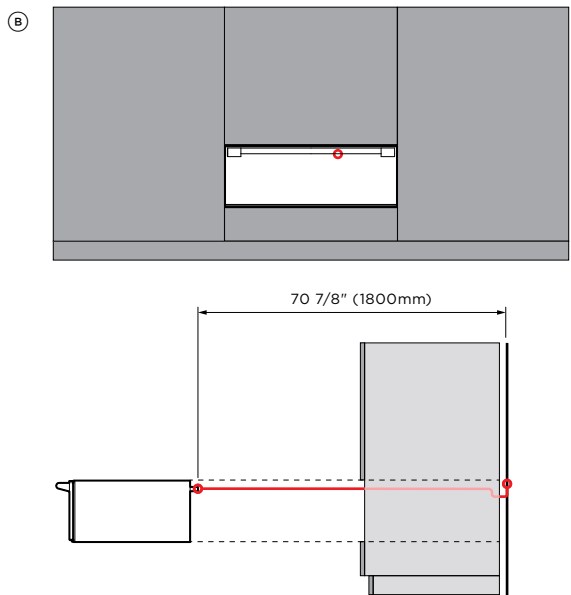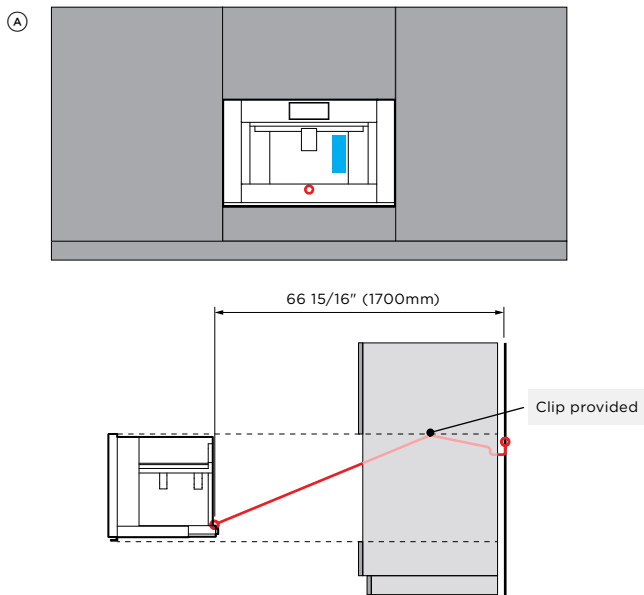

POWER CABLE 

WATER TANK

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

	(A) BUILT-IN COFFEE MAKER EB30PSX1	(B) WARMING DRAWER AND INTEGRATED WARMING DRAWER WB30SPEX3, WB30SDEI3	(C) VACUUM SEAL DRAWER AND INTEGRATED VACUUM SEAL DRAWER VB30SPEX3, VB30SDEI3
POWER CORD			
Maximum power cord length*	66 15/16" (1700mm)**	70 7/8" (1800mm)	70 7/8" (1800mm)
Location	Lower centered	Upper right	Upper right
Connection**	Plug with flex cord	Plug with flex cord	Plug with flex cord
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide. ***The power cable must be long enough to allow the appliance to be extracted from the cabinet to fill the coffee bean container. Fix the power cable with the clip.			
ELECTRICAL			
Supply	120V, 60 Hz	120V, 60 Hz	120V, 60 Hz
Service	15 A	15 A	15 A
Note: Multiple product installation requires the design of power outlets according to local regulations.			
CAPACITY			
Total water tank capacity	81 fl oz (2.4L)	-	-

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

