

INTEGRATED DISHWASHER

PLANNING GUIDE

24" Series 7 Integrated Tall Dishwasher | DW24UT2I3

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.

designsupport@fisherpaykel.com

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown.

This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
SPECIFICATION GUIDE					
Product Features	4				
Product Specifications	5				

SPECIFICATION GUIDE

OVERVIEW

Designed for seamless integration, this tall model offers quiet performance and flexible loading for up to 16 place settings. At the end of the cycle, the door automatically opens to release steam, while AirCurtain technology creates a protective barrier to help shield surrounding cabinetry. With simple installation, SmartHQ™ connectivity, and panel-ready styling, it's ideal for modern kitchens.

**FEATURES**

- ① Quiet operation supports open-plan and minimal kitchen environments
- ② Tall model fits up to 16 place settings for greater capacity and convenience
- ③ Panel-ready design enables seamless integration with surrounding cabinetry
- ④ Straightforward installation, with simple panel alignment and specifications
- ⑤ Recognized as Energy Star Most Efficient
- ⑥ Third rack, adjustable middle rack, and foldable tines for flexible loading
- ⑦ Pitch-adjustable tines allow space for deep bowls and larger dishware
- ⑧ Auto door open at cycle end for steam release and efficient drying
- ⑨ AirCurtain technology protects cabinetry by directing steam away from the bench
- ⑩ Wi-Fi enabled for remote monitoring and control via SmartHQ™ app

PRODUCT OVERVIEW**DW24UT2I3**

Series 7, Integrated Tall Dishwasher

ACCESSORIES

ADDW24TPX

Door panel for Integrated Dishwasher, Tall

AHD5-OBDD-60S

Contemporary Square Fine Handle, 24"

AHS-OBDD-60S

Contemporary Round Handle, 24"

AHP3-DWDD-SX

Professional Round Flush Handle Stainless Steel, 24"

AHP3-DDDW24DC

Professional Round Flush Dark Copper Handle, 24"

AHP3-DDDW24BA

Professional Round Flush P3 Brass Handle, 24"

AHCL-DDDW-24X

Classic Round Handle Kit, 24"

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATIONS

Model Number

DW24UT213 Series 7, Integrated Tall Dishwasher

Weight

Packaged 128 lb (58 kg)
Unpackaged 110 lb (50 kg)

Electrical


Supply 120 V, 60 Hz
Service 10 A
Connection No power cord supplied

Plumbing


Pressure 30 kPA - 1000 kPA
Connection 3/4" BSP inlet valve

Note: Electrical and Plumbing connections to be made in adjacent cabinets either side of dishwasher.

PRODUCT DIMENSIONS

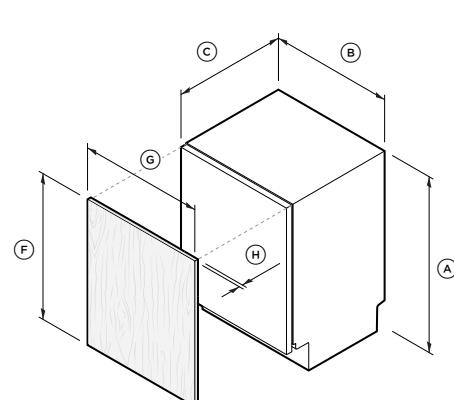

ISOMETRIC VIEW

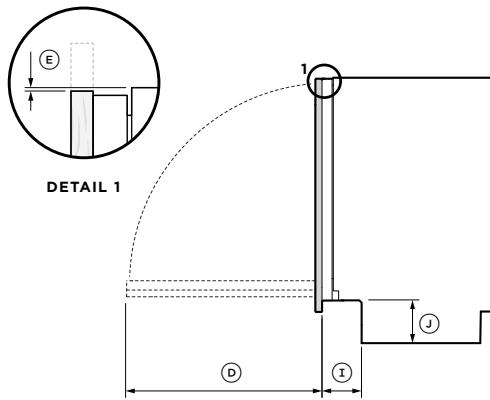

SIDE VIEW


Product Dimensions

	inch	mm
Ⓐ Height of dishwasher	33 7/8 - 36 1/8	860 - 917
Ⓑ Width of dishwasher	23 1/2	597
Ⓒ Depth of dishwasher*	22 13/16	554
Ⓓ Depth of door opening*	26 5/8	676
Ⓔ Height from top of chassis to top of custom panel or accessory panel**	1/8	3
Ⓕ Height of door panel - custom panel** - accessory door panel (ADDW24TPX)	28 1/4 - 31 3/16 29 7/8	717 - 792 759
Ⓖ Width of door panel - custom door minimum - accessory door panel (ADDW24TPX)	23 7/16 23 7/16	595 595
Ⓗ Thickness of door panel - custom panel - accessory door panel (ADDW24TPX)	5/8 - 1 3/4	16 - 25 19
Ⓘ Depth of toe kick recess	4 9/16	116
Ⓙ Height of toe kick recess	4 11/16 - 6 7/8	119 - 176
Maximum weight of custom door panel including handle	9 - 20 lb	4 - 9 kg

* excludes front panel and handle

** custom panel can be extended upwards in addition to stated dimension. Cabinetry clearances must be met.

CABINETRY DIMENSIONS

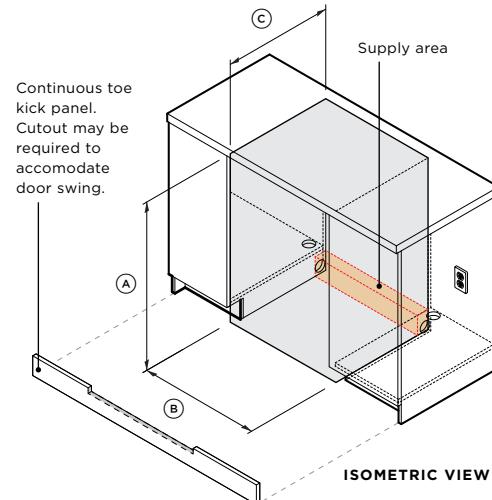

ISOMETRIC VIEW

Cabinetry Dimensions

	inch	mm
Ⓐ Height of cavity - minimum - maximum	33 7/8 36 1/8	860 917
Ⓑ Minimum width of cavity	23 5/8	600
Ⓒ Minimum depth of cavity*	22 7/8	560
Minimum clearance between dishwasher front panel and adjacent cabinetry	1/16	2
Supply area - height - depth	4 2	102 51

* excludes front panel

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

