

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

DISHWASHER, 24", TALL, SANITIZE



OVERVIEW

Available in stainless steel with a recessed handle to match Fisher & Paykel's Contemporary family of appliances, this dishwasher is designed to fit flush, for a streamlined finish that will fit any kitchen aesthetic. Flexible storage allows for easy stacking, whilst the combination of clever technologies means a reliable wash performance.

MODELS

Dishwasher, 24", Tall, Sanitize

Stainless steel finish
DW24UNT2X2

SERIES & STYLE

Series 5
Contemporary

FEATURES

- ① Can be installed under counter heights between 33 3/4" to 36 1/8", fitting flush with cabinetry for a seamless look
- ② Tall height offers a generous 25" of usable space and easily accommodates plate sizes up to 13"
- ③ Seven wash programs including specialty Auto, Eco and 60 Min
- ④ Extra Dry, Sanitize and Half Load wash modifiers provide extra wash options
- ⑤ ThermoDry technology with end-of-cycle auto-door-open removes excess moisture, and leaves your dishes with a dry finish
- ⑥ Fully flexible racking including adjustable middle basket and cup racks, foldable wine racks and cutlery basket
- ⑦ Front-of-door controls with status display, and interior LED lighting
- ⑧ Wi-Fi capability and a SmartHQ™ app connectivity for remote control and notifications
- ⑨ With Energy Star 'most efficient' rating*

*Subject to change. Final certification pending.

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

DISHWASHER, 24", TALL, SANITIZE

PRODUCT SPECIFICATIONS

Model No.	DW24UNT2X2
Dimensions	H 33 3/4 - 36 1/8" (857 - 917mm) W 23 1/2" (597mm) D 22 5/8" (574mm)
Electrical	
Supply	120V, 60Hz
Service	10A
Plumbing	
Supply	3/4" BSP Male Fitting
Pressure	Min 5 psi (34.5 kPa), max 150 psi (1034 kPa) Hot water connection @ max 140°F (20°C)


PLUMBING AND ELECTRICAL

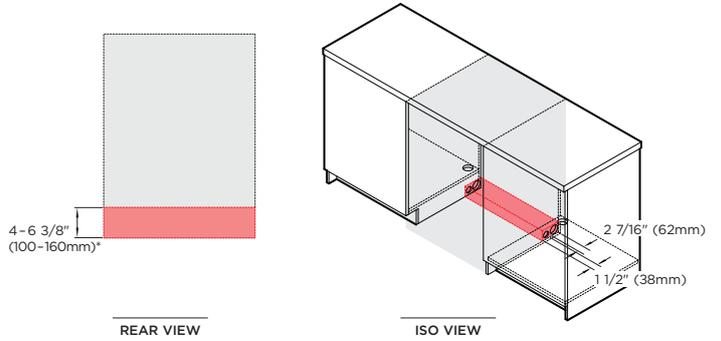


Service outlet at rear extends both sides, hoses and cords can be routed to either or both sides.

*Depending on adjustment of leveling feet.

PRODUCT DIMENSIONS

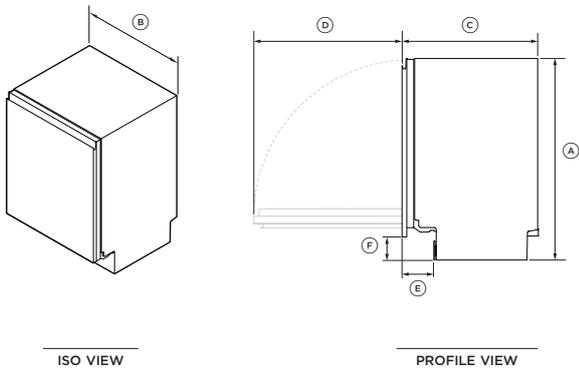

CAVITY DIMENSIONS: STANDARD INSTALLATION

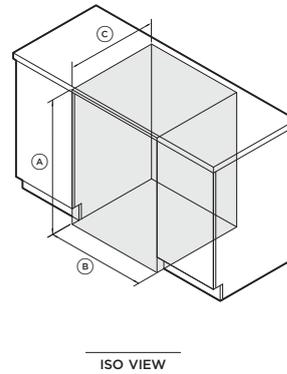

	in	mm
Ⓐ Overall height*	33 3/4 - 36 1/8	857 - 917
Ⓑ Overall width**	23 1/2	597
Ⓒ Overall depth	22 5/8	574
Ⓓ Depth of open door	25 13/16	656
Ⓔ Depth of toe kick recess	5 3/8	136
Ⓕ Height from floor to door panel base	3 11/16 - 6	93 - 153

	in	mm
Ⓐ Minimum overall height*	33 3/4	857
Ⓑ Minimum overall width	23 5/8	600
Ⓒ Minimum overall depth**	22 13/16	580

*Depending on adjustment of leveling feet

**Includes front panels

*Depending on adjustment of leveling feet

**Excluding side seals

Custom panel/toe kick panel thickness not included in these dimensions