

MOEN®

There is more than one version of this model.
Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Side Spray models includes side spray with Duralock™ quick connect installation
- 360° rotating spout

OPERATION

- Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)
- Operates with less than 5 lbs. of force

FLOW

- Spout flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1234 cartridge design
- Nonmetallic/nonferrous and stainless steel material

STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

Specifications

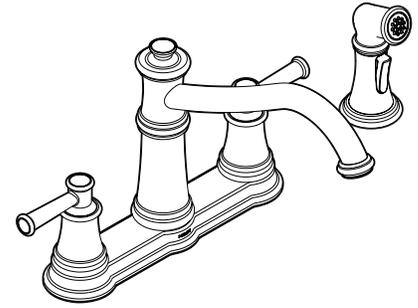


Belfield™ Two-Handle Kitchen Faucet

Model: 7250 series less Side Spray

Model: 7255 series with Side Spray

NOTE: 7250 SERIES IS DESIGNED TO INSTALL THROUGH 3 HOLES, 1-1/4" (32MM) MIN. DIA., 4" (102MM) ON CENTER

NOTE: 7255 SERIES IS DESIGNED TO INSTALL THROUGH 4 HOLES, 1-1/4" (32MM) MIN. DIA., 4" (102MM) ON CENTER

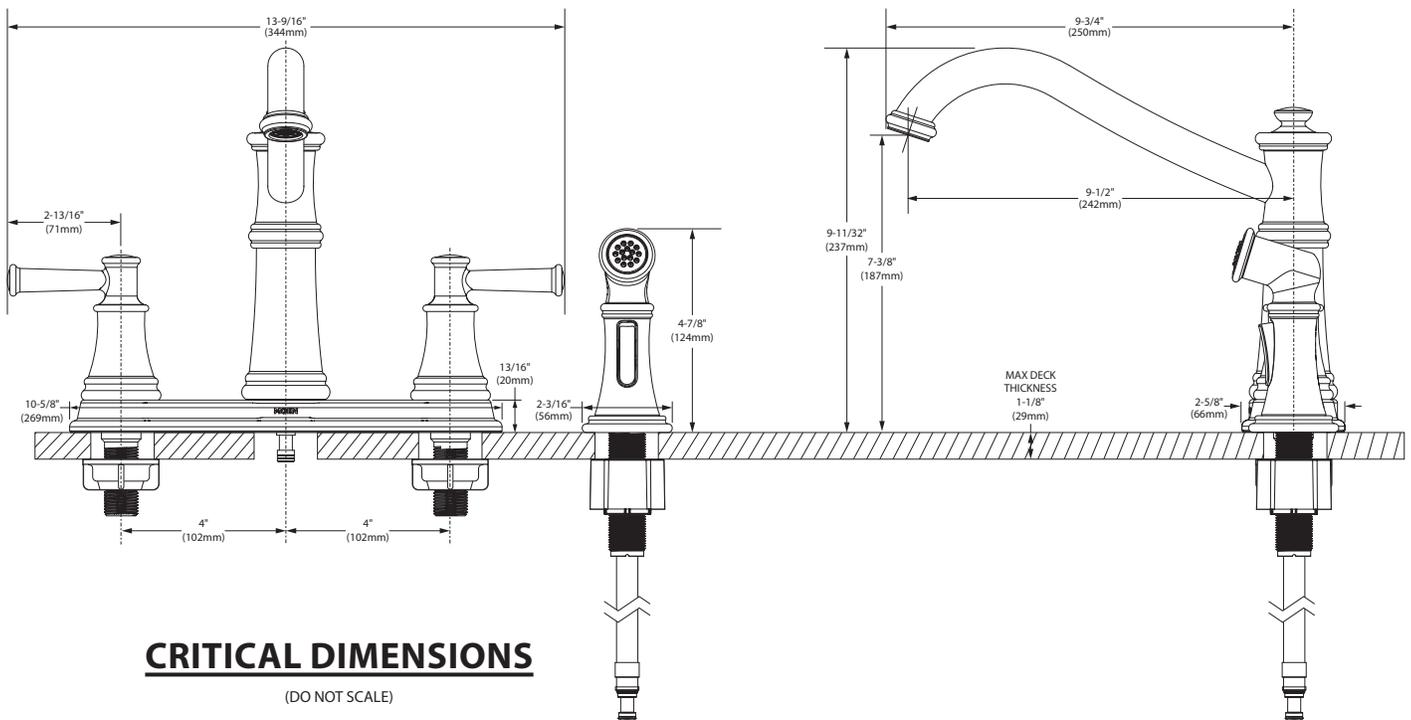

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Side Spray models includes side spray with Duralock™ quick connect installation
- 360° rotating spout

OPERATION

- Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)
- Operates with less than 5 lbs. of force

FLOW

- Spout flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


- 1224 cartridge design
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

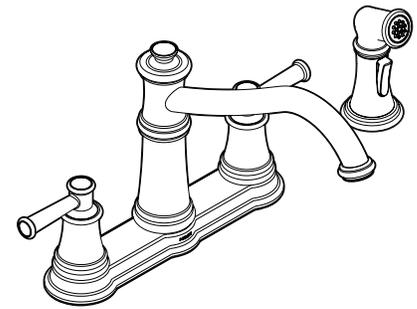

Belfield™
Two-Handle Kitchen Faucet

Model: 7250 series less Side Spray

Model: 7255 series with Side Spray

NOTE: 7250 SERIES IS DESIGNED TO INSTALL THROUGH 3 HOLES, 1-1/4" (32MM) MIN. DIA., 4" (102MM) ON CENTER

NOTE: 7255 SERIES IS DESIGNED TO INSTALL THROUGH 4 HOLES, 1-1/4" (32MM) MIN. DIA., 4" (102MM) ON CENTER

