

24" MINIMAL OVENS AND COMPANIONS

PLANNING GUIDE

SERIES 7 SELF-CLEANING OVEN | OB24SAMPTB5

SERIES 7 COMPACT CONVECTION-SPEED OVEN | OM24NMTB5

SERIES 9 WARMING DRAWER | WB24SMB3

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN

DESIGN CHOICE

Styles	
Minimal Style	5
Installation Options	6
Overview	7

SPECIFICATION GUIDE

Self-Cleaning Oven	9
Compact Convection-Speed Oven	10
Warming Drawer	11
Dimensions	12
Services	13

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

DEVELOPED AND DETAILED DESIGN

DATA SHEETS

Self-Cleaning Oven	
Compact Convection-Speed Oven	16
Warming Drawer	17

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown.
This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

DETAILED DESIGN

OPERATIONS

Installation	19
Ventilation	20
Stack Height	21
SERVICES	
Power Connection and Electrical	23

DESIGN CHOICE



MINIMAL STYLE - HANDLELESS



MINIMAL STYLE



CONTEMPORARY STYLE

Celebrating a singular aesthetic to blend seamlessly into the kitchen, Minimal style ovens feature subtle textural and tonal contrasts for a sense of refinement and purity.

Defined by clean lines and timeless design cues, Contemporary style ovens bring a sense of balance and refinement. A versatile aesthetic that complements a range of kitchen styles.

This Planning Guide is for the Minimal Style featuring 24" Ovens and Companions. For information on other styles, please visit the Fisher and Paykel website. To see what models are available, head to the 'Overview' section in this Planning Guide.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FINISH




Black

OVENS

SELF-CLEANING

CONVECTION-SPEED




COMPANIONS


WARMING DRAWER



INSTALLATION OPTIONS



Installation in wall

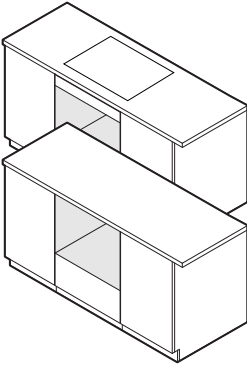

Installation under-bench

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FISHER & PAYKEL

90005567B US-CA

PLANNING GUIDE 24" OVENS AND COMPANIONS VERSION B - MAY 2026

© FISHER & PAYKEL APPLIANCES LIMITED 2026

<< CONTENTS

PAGE 5

CONSIDERATIONS


Different configurations possible, consider heights for grid and row installations.

STACK HEIGHT


Stack Height is overall product height with minimum clearance above appliance front panel to upper cabinetry front panel or appliance.

STACKED INSTALLATION

Stack Height
41 3/4" (1060mm)




Stack Height
47 1/4" (1200mm)




GRID INSTALLATION

Stack Height
23 5/8" (600mm)



ROW INSTALLATION







Stack Height
23 5/8" (600mm)



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FRONT ELEVATION

SIDE ELEVATION



Series	
Black	
Interface	
Overall Height	
Overall Width	
Control Panel/Front Panel Thickness	

SELF-CLEANING OVEN	
Series	Series 7
	OB24SAMPTB5
Interface	5" Touchscreen
Overall Height	23 9/16" (598mm)
Overall Width	23 7/16" (596mm)
Control Panel/Front Panel Thickness	13/16" (20mm)

COMPACT CONVECTION-SPEED OVEN	
Series	Series 7
	OM24NMTB5
Interface	5" Touchscreen
Overall Height	18" (458mm)
Overall Width	23 7/16" (596mm)
Control Panel/Front Panel Thickness	13/16" (20mm)

WARMING DRAWER	
Series	Series 9
	WB24SMB3
Interface	-
Overall Height	5 1/2" (140mm)
Overall Width	23 7/16" (596mm)
Control Panel/Front Panel Thickness	13/16" (20mm)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATION GUIDE

SERIES 7 & 9



OVERVIEW

Designed to complement Minimal style appliances, this oven delivers a seamless, flush finish – ideal for modern kitchen designs. The pyrolytic self-cleaning function breaks down food residue for an easy clean, while precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the touch screen and SmarHq™.

PRODUCTS

OB24SAMPTB5 - Black
24" Series 7 Minimal Self-Cleaning Oven

SERIES & STYLE

Series 7
Minimal

ACCESSORIES

- 1 Self-cleaning Proof Side Ladders
- 2 Telescopic Sliding Runners
- 3 Wire Shelf (x2)

FEATURES

- 1 Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- 2 Self-cleaning pyrolytic function breaks down food residue for an easy clean
- 3 Premium soft open and close door
- 4 Generous 2.5 cu ft useable capacity
- 5 5" touchscreen is intuitive and easy to use
- 6 Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- 7 Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- 8 Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- 9 Connected capability via the SmarHq™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- 4 Multi-functional Air Fry Tray
- 5 Roasting Dish
- 6 Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to complement Minimal style appliances, this Convection-Speed Oven delivers a seamless, flush finish – ideal for modern kitchen designs. Versatile cooking options including microwave or convection offer efficient heating across a variety of dishes. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the touch screen and SmarHQT[™].

PRODUCTS

OM24NMTB5 - Black
24" Series 7 Minimal Compact Convection-Speed Oven

SERIES & STYLE

Series 7
Minimal

FEATURES

- 1 Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- 2 Combines fast microwave cooking with even convection heat for versatile, efficient heating across a variety of dishes
- 3 With soft open and close, the CoolTouch door is safe to touch from the outside - protecting hands and surrounding cabinetry
- 4 Compact 1.3 cu ft useable capacity
- 5 5" touchscreen is intuitive and easy to use
- 6 Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- 7 Versatile microwave only, convection only or combi-microwave functions to suit a range of cooking styles
- 8 Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- 9 Connected capability via the SmarHQT[™] app gives control & visibility from anywhere at anytime

ACCESSORIES

- 1 Chrome Side Ladders
- 2 Wire Shelf
- 3 Step Down Wire Shelf
- 4 Glass Tray
- 5 Broil Rack
- 6 Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW


Designed to complement Minimal style appliances, this Warming Drawer delivers a seamless, flush finish – ideal for modern kitchen designs. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 6 place settings, it keeps meals ready to serve.

PRODUCTS

WB24SMB3 - Black
24" Series 9 Minimal Warming Drawer

FEATURES

- 1 Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- 2 Push-to-open drawer, designed for added convenience
- 3 Simple and intuitive touch controls for effortless operation
- 4 Easy-to-clean glass base
- 5 Automatic switch-off and delayed start functionality to help keep dishes warm until it is time to serve
- 6 Room for 6 standard-sized place settings
- 7 Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility

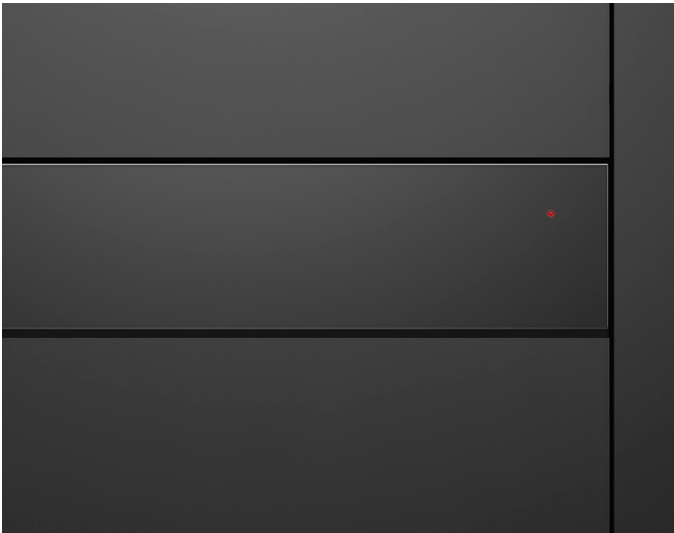







SERIES & STYLE

Series 9
Minimal

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS

CAVITY DIMENSIONS






PRODUCT DIMENSIONS	
A	Overall product height
B	Overall product width
C	Chassis height
D	Chassis width
E	Chassis depth
F	Front frame depth (excludes handle)
	Front panel height
	Front panel width
	Door open depth at 90° (from product front)
	Drawer extension
CAVITY DIMENSIONS	
G	Cavity height
H	Cavity width
I	Cavity depth (from chassis front datum)

SELF-CLEANING OVEN	
OB24SAMPB5	
inch	mm
23 9/16	598
23 7/16	596
22 5/8	575
21 7/8	556
21 7/16	545
13/16	20
-	-
-	-
18 1/4	463
-	-
inch	mm
min 22 13/16	min 580
min 22 1/16	min 560
min 21 5/8	min 550

COMPACT CONVECTION-SPEED OVEN	
OM24NMTB5	
inch	mm
18	458
23 7/16	596
17 1/8	435
21 7/8	556
21 7/16	545
13/16	20
-	-
-	-
12 3/4	324
-	-
inch	mm
min 17 5/16	min 440
min 22 1/16	min 560
min 21 5/8*	min 550*

WARMING DRAWER	
WB24SMB3	
inch	mm
5 1/2	140
23 7/16	596
5 1/2	140
21 3/8	543
21 9/17*	547*
13/16	20
5 3/8	136
23 7/16	596
-	-
max 16 5/16	max 414
inch	mm
min 5 9/16	min 142
min 22 1/16	min 560
min 21 5/8	min 550

*Minimum total ventilation area of 43.4in (280cm²) is required. The ventilation opening must be located at the rear of the cavity and may be positioned at the base, sides, or top of the cavity.
Note: 24" Fisher & Paykel ovens can be installed directly onto the drawer. An intermediate shelf is not required.



PRODUCT REQUIREMENTS	
Dedicated Circuit (A)	
Rated Power (W)	
Supply (Hz)	
Voltage (V)	
Connection	

*Supplied with product.
Note: For multi-residential installations, use the Rated Power to calculate the demand.

CAPACITY	
Total Oven capacity	
Total water tank capacity	

Note: All Coffee Makers has internal water tanks which need to be filled manually. No external water supply is required.

WEIGHTS	
Packaged	
Unpackaged	

SELF-CLEANING OVEN OB24SAMPTB5	
	20
	4200 / 3200
	60
	208 / 240
	Hard-wired 48" (1220mm)*

	3cu ft (85L)
	-

	119lb (54kg)
	99lb (45kg)

COMPACT CONVECTION-SPEED OVEN OM24NMTB5	
	20
	3300 / 3900
	60
	208 / 240
	Hard-wired min 70 7/8" (1800mm)*

	1.7cu ft (49L)
	-

	106lb (48kg)
	84lb (38kg)


WARMING DRAWER WB24SMB3	
	15
	930
	60
	120
	Flex cord 70 7/8" (1800mm)*

	-
	-

	40lb (18kg)
	37lb (17kg)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DATA SHEETS

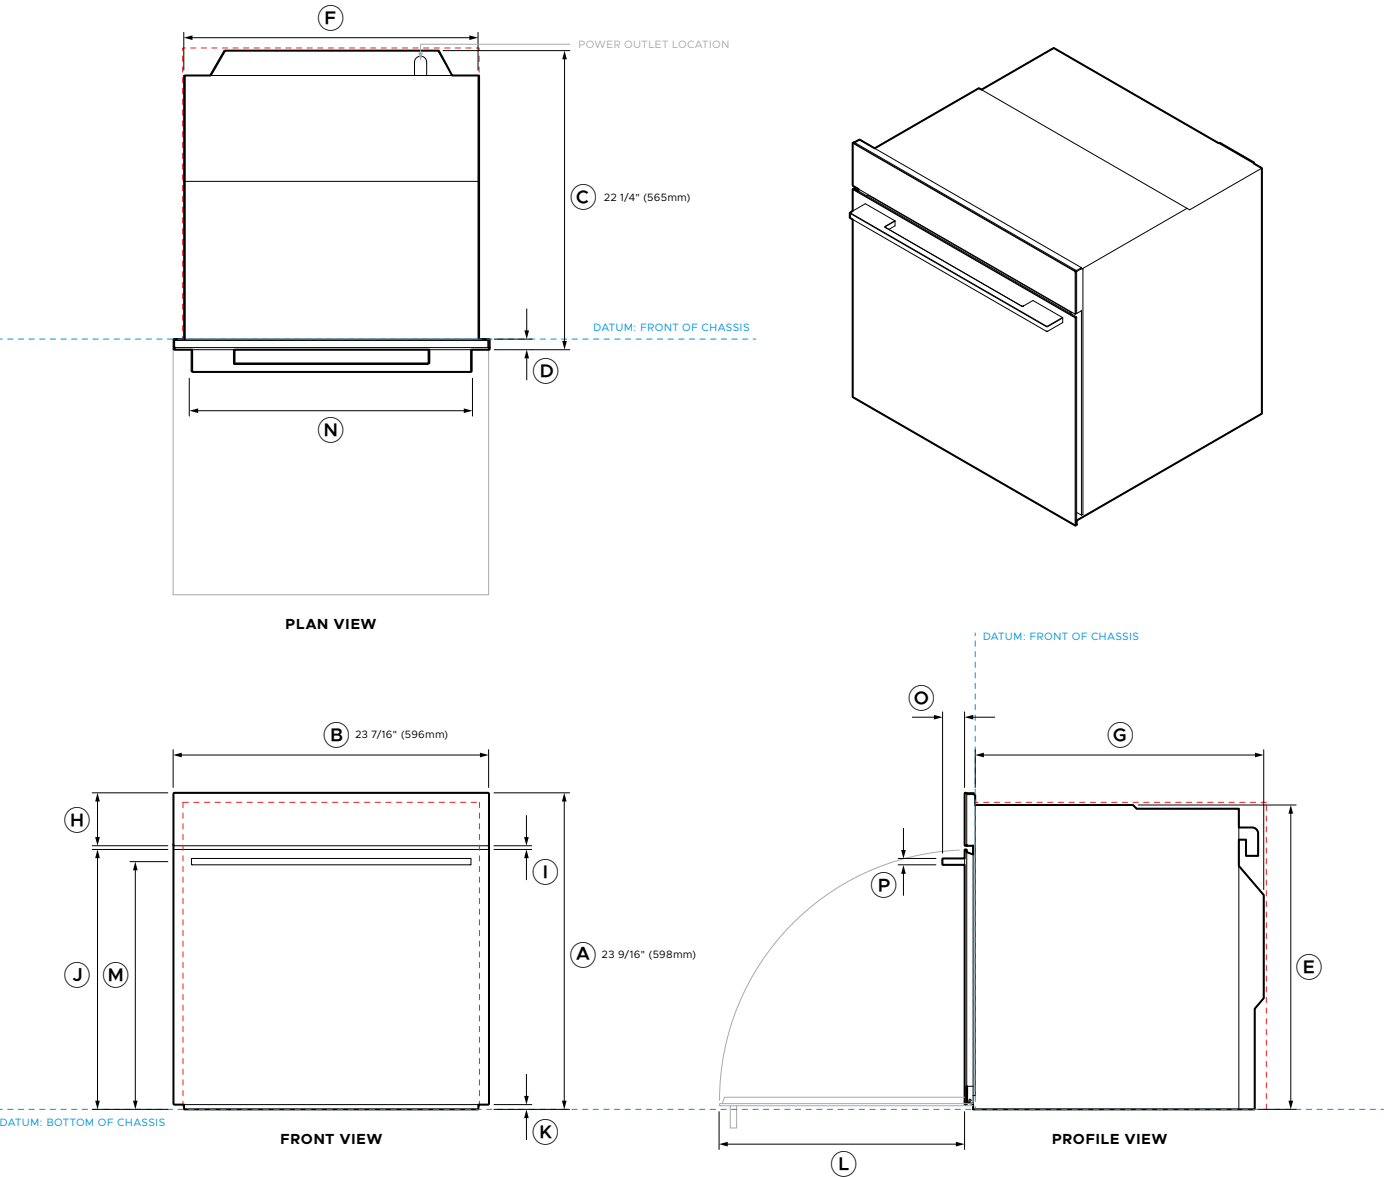





Model no:
OB24SAMPTB5 24" Series 7 Minimal Self-Cleaning Oven - Black

Product Dimensions		inch	mm
A	Overall product height	23 9/16	598
B	Overall product width	23 7/16	596
C	Overall product depth (excludes handle)	22 1/4	565
D	Front frame depth (excludes handle)	13/16	20
E	Chassis height	22 5/8	575
F	Chassis width	21 7/8	556
G	Chassis depth	21 7/16	545
H	Control panel height	3 15/16	100
I	Door-to-control panel gap	9/32	7
J	Door upper edge height (from chassis base datum)	19 5/16	491
K	Door lower edge height (from chassis base datum)	3/8	9
L	Door open depth at 90° (from product front)	8 1/4	463
M	Handle centreline height (from chassis base datum)	18 7/16	468
N	Handle width	20 13/16	528
O	Handle depth (projection)	1 21/32	42
P	Handle thickness	15/32	12

Minimum Clearances		inch	mm
Cavity height		min 22 13/16	min 580
Cavity width		min 22 1/16	min 560
Cavity depth (from chassis front datum)		min 21 5/8	min 550
Front frame clearance - top & sides		min 1/16	min 2

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

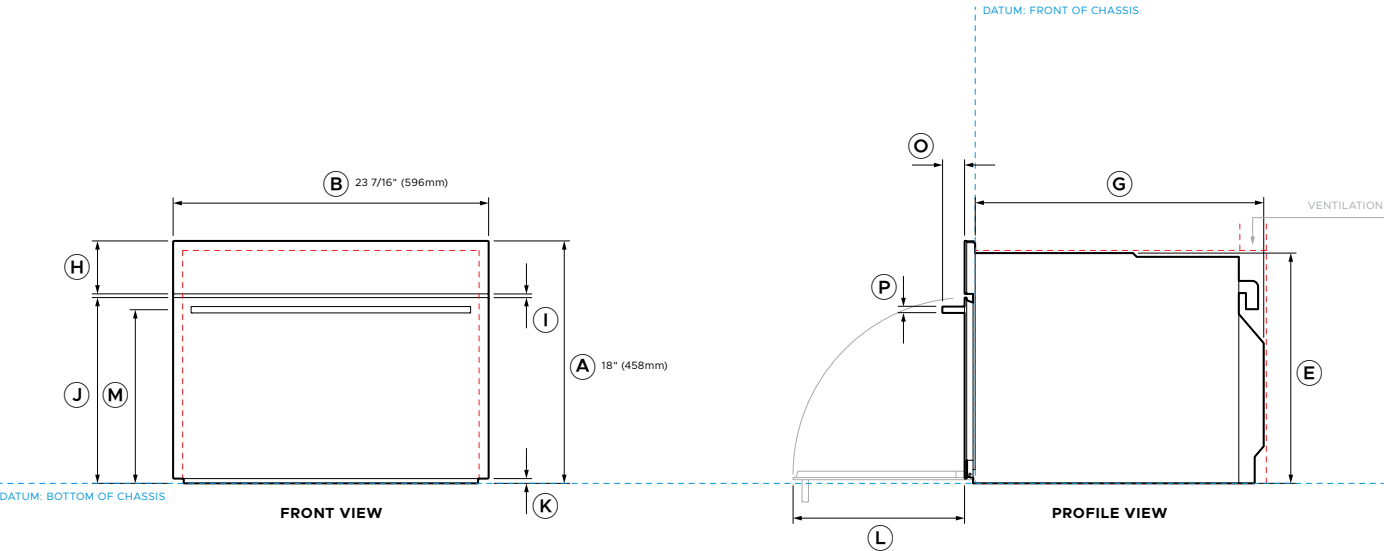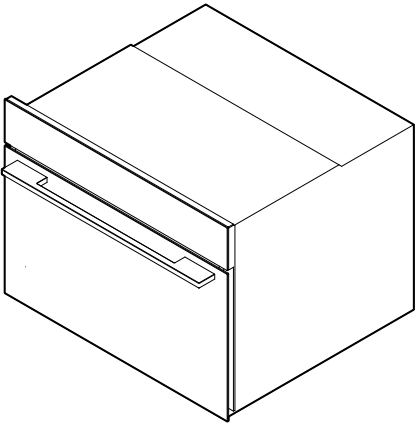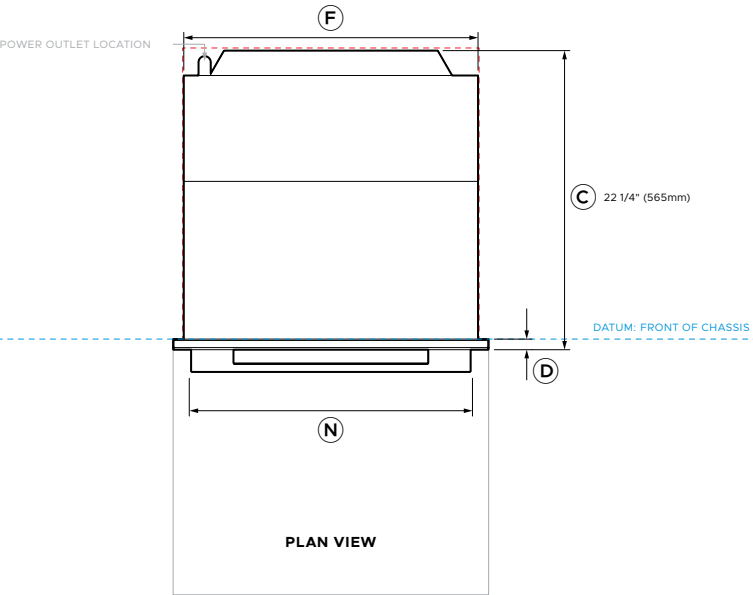

Model no:		
OM24NMTB5	24" Series 7 Minimal Compact Convection-Speed Oven - Black	

Product Dimensions		inch	mm
A	Overall product height	18	458
B	Overall product width	23 7/16	596
C	Overall product depth (excludes handle)	22 1/4	565
D	Front frame depth (excludes handle)	13/16	20
E	Chassis height	17 1/8	435
F	Chassis width	21 7/8	556
G	Chassis depth	21 7/16	545
H	Control panel height	3 15/16	100
I	Door-to-control panel gap	9/32	7
J	Door upper edge height (from chassis base datum)	13 13/16	351
K	Door lower edge height (from chassis base datum)	3/8	9
L	Door open depth at 90° (from product front)	12 3/4	324
M	Handle centreline height (from chassis base datum)	12 29/32	328
N	Handle width	20 13/16	528
O	Handle depth (projection)	1 21/32	42
P	Handle thickness	15/32	12





Minimum Clearances		inch	mm
Cavity height		min 17 5/16	min 440
Cavity width		min 22 1/16	min 560
Cavity depth (from chassis front datum)		min 21 5/8	min 550
Front frame clearance - top & sides		min 1/16	min 2

Ventilation Requirements		inch	mm
Rear ventilation opening height*		min 2	min 50
Rear ventilation opening width*		min 22 1/16	min 560

*Minimum total ventilation area of 43.4in (280cm²) is required. The ventilation opening must be located at the rear of the cavity and may be positioned at the base, sides, or top of the cavity.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

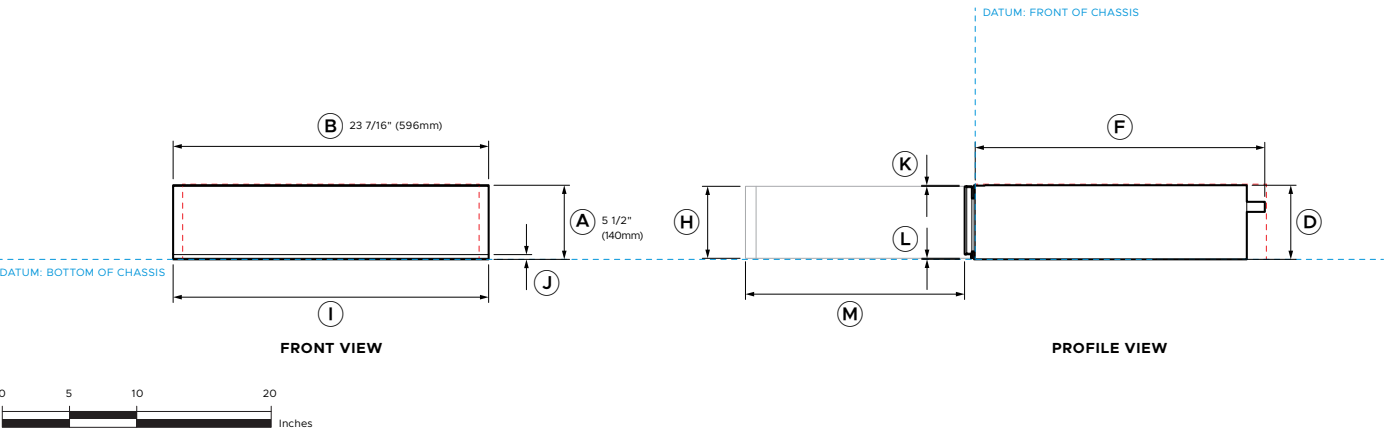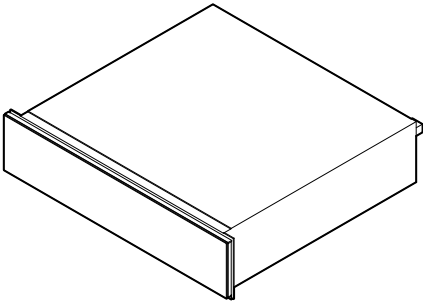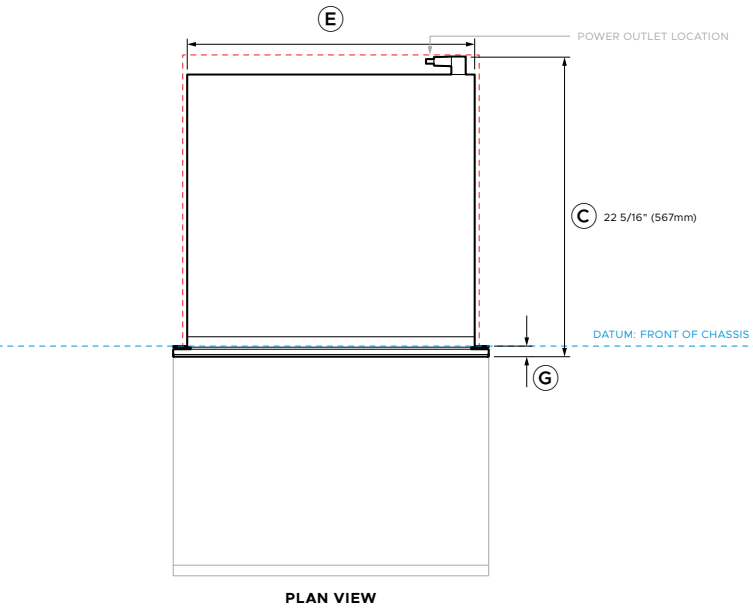

Model no: WB24SMB3 24" Series 9 Minimal Warming Drawer - Black

Product Dimensions		inch	mm
A	Overall product height	5 1/2	140
B	Overall product width	23 7/16	596
C	Overall product depth (includes power plug)	22 5/16	567
D	Chassis height	5 1/2	140
E	Chassis width	21 3/8	543
F	Chassis depth	21 9/17	547
G	Front frame depth (includes flange and front panel)	13/16	20
H	Front panel height	5 3/8	136
I	Front panel width	23 7/16	596
J	Front panel lower visual edge height (from chassis base datum)	3/8	9
K	Front panel upper edge to top of chassis	1/16	2
L	Front panel lower true edge height (from chassis base datum)	1/16	2
M	Drawer extension	max 16 5/16	max 414

Minimum Clearances		inch	mm
Cavity height			
- standalone installation		min 5 9/16	min 142
- stack installation		5 1/2	140
Cavity width		min 22 1/16	min 560
Cavity depth (from chassis front datum)		min 21 5/8	min 550
Front frame clearance - top & sides		min 1/16	min 2

Note: 24" Fisher & Paykel ovens can be installed directly onto the drawer. An intermediate shelf is not required.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


PLANNING CONSIDERATIONS

CABINETRY CLEARANCES


CLEARANCES	inch	mm
A Front/custom panel clearance - sides	min 1/16	min 2
B Front/custom panel clearance - top	min 1/16	min 2

UNDERBENCH


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.



DETAIL 1
PROFILE VIEW




DETAIL 2
PROFILE VIEW




DETAIL 3
PLAN VIEW

Products require no bottom clearance between product to cabinetry front panel or appliance.

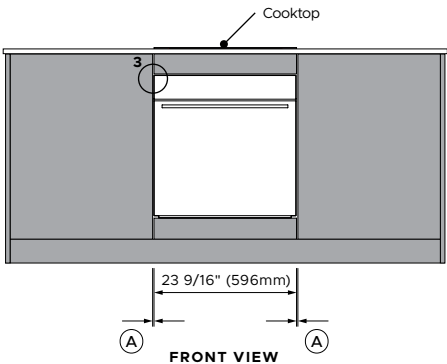

FRONT VIEW

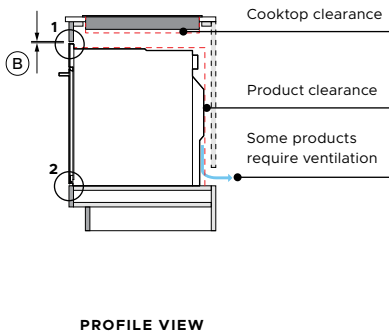

PROFILE VIEW

INSTALLATION

SINGLE

Head to the 'Data Sheets' section in this Planning Guide for details.

STACKED OR GRID


Head to the 'Stack Height' section in this Planning Guide for details.

BLACK CLASHING

Black edge clashing is recommended on all front facing panels and openings at product locations, and on side cabinet panels where a rebated exists.

DIVIDING SHELF

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

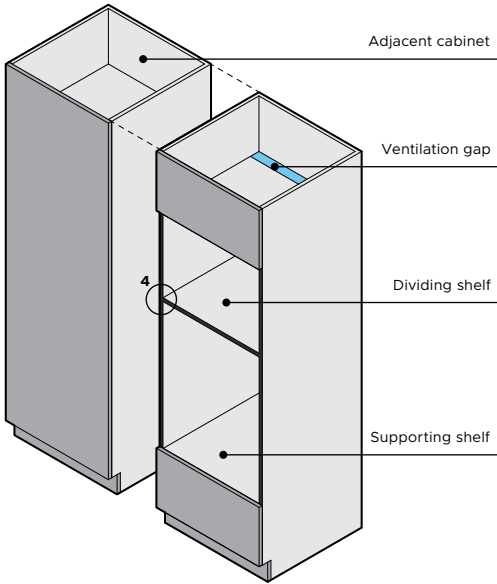


OVEN CABINETRY TRIM (OPTIONAL)


An optional black cabinetry trim is supplied with all ovens.

Prior to installation, check the trim height against dividing or supporting shelves. If required, score and cut the trim to the appropriate height to prevent interference.



Note: Microwave ovens has a different trim width. Ensure the correct trim is used for each appliance.



DETAIL 4
ISOMETRIC VIEW

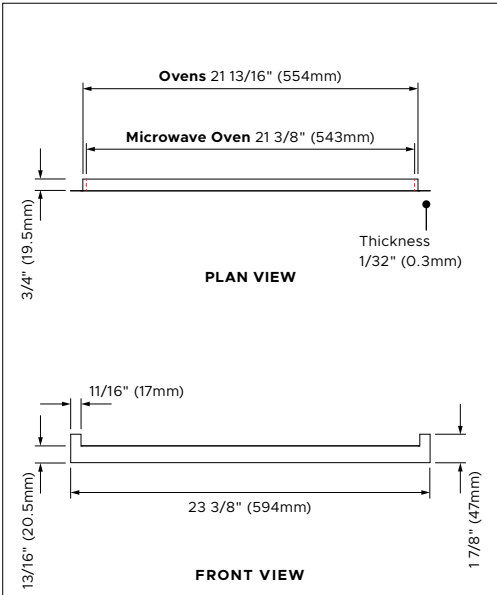

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

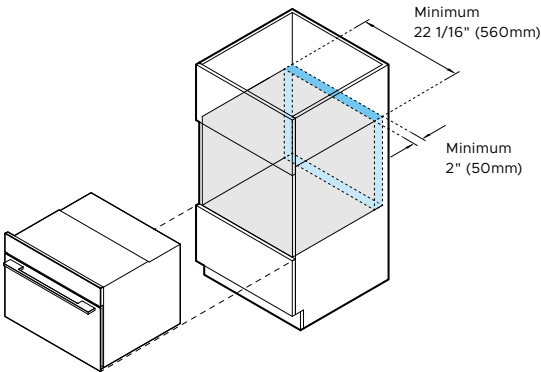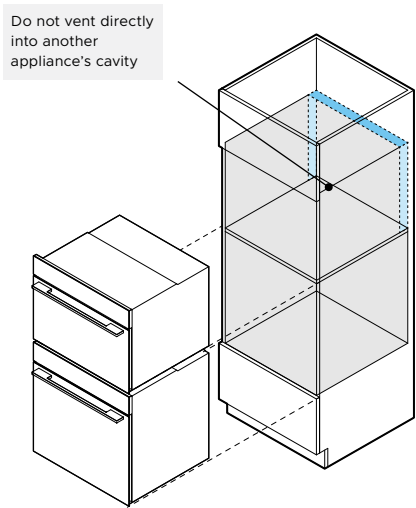

Options for total minimum ventilation area

VENTILATION

Ventilation is required to ensure proper performance of certain products.

Possible Venting Locations:

- Space behind the cabinet
- Upper cavity (not a product cavity)
- Toe kick cavity
- Adjacent cabinetry (not a product cavity)

Cabinet with back panel or installed against a wall:

Select one of the venting locations listed above, providing the required minimum ventilation area.

Cabinet without back panel:

If the cabinet is manufactured without a back panel and is not positioned directly against a wall, the open back will provide sufficient ventilation.

Do not vent directly into another appliance's cavity.

COMPACT CONVECTION-SPEED OVEN

OM24NMTB5

VENTILATION PLACEMENT

Total minimum ventilation area	43.4in (280cm ²)
	or
	2" x 22 1/16" (50mm x 560mm)
Cavity venting options	base, sides, top or back

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

STACK HEIGHT

Stack height is overall product height with minimum clearance above appliance control panel or front panel.

A Overall product height

+


B Minimum top clearance above appliance front/custom panel to upper appliance

=

C Stack Height

1

DETAIL 1
PROFILE VIEW

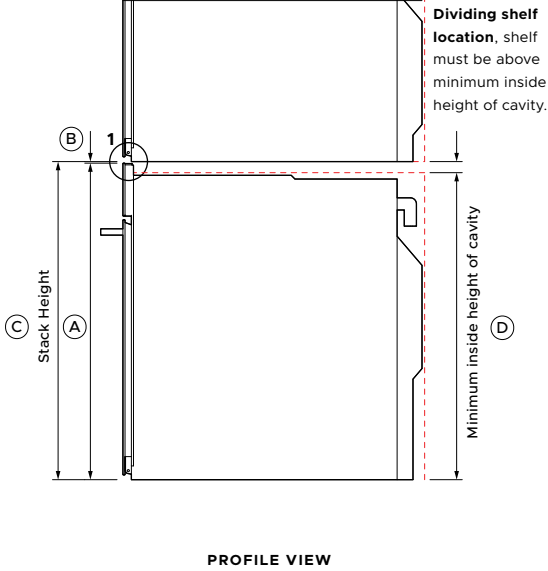


Ventilation air vent is required at rear of cabinetry for some products.



Dividing shelves are required to support stacked appliances and to achieve correct clearance.

Dividing shelves must be constructed from material that will support the weight of the appliances. Ensure the product is not bearing any weight from cabinetry or products installed above.

Drawers can fully support a 24" Fisher & Paykel ovens. An intermediate shelf is not required.

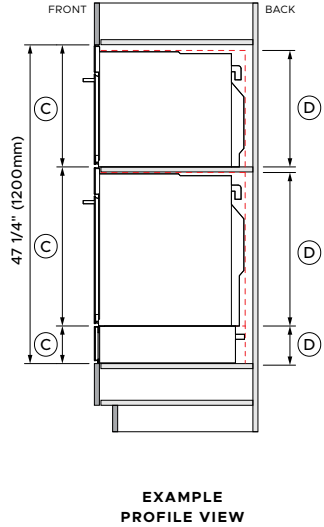

MINIMUM INSIDE HEIGHT OF CAVITY



DIMENSIONS	
A	Overall product height
B	Minimum top clearance above appliance front/custom panel
C	Stack height
D	Minimum cavity height


SELF-CLEANING OVEN OB24SAMPTB5		
	inch	mm
A	23 9/16	598
B	1/16	2
C	23 5/8	600
D	22 13/16	580

COMPACT CONVECTION-SPEED OVEN OM24NMTB5		
	inch	mm
A	18	458
B	1/16	2
C	18 1/8	460
D	17 5/16	440


WARMING DRAWER WB24SMB3		
	inch	mm
A	5 1/2	140
B	-	-
C	5 1/2	140*
D	5 1/2	140

*24" Fisher & Paykel ovens can be installed directly onto the drawer. An intermediate shelf is not required. Note: Standalone installation of drawers require minimum clearance above, head to 'Data Sheets' section of this Planning Guide for more details.

SERVICES

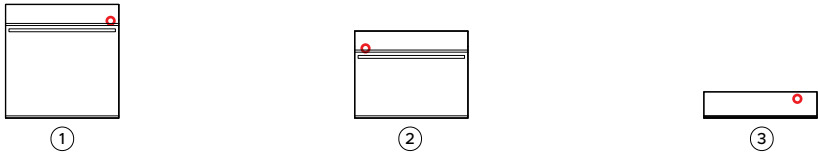

FRONT VIEW

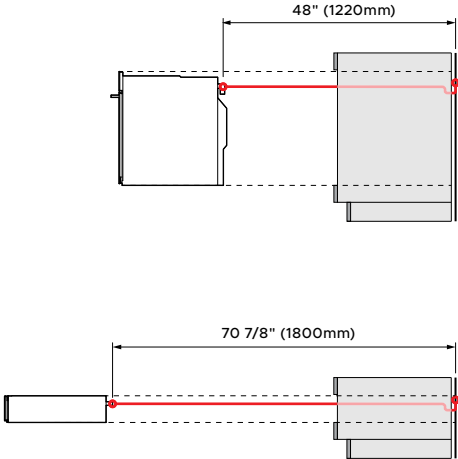

PROFILE VIEW

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following installation to allow access for any future product maintenance.

POWER CONNECTION — WATER TANK LOCATION

HARD-WIRED

For more information on electrical requirements, refer to the Installation Guide.

SERIES 9	
POWER CONNECTION	
Connection	Hard-wired
Location	48" (1220mm) upper right
ELECTRICAL	
Dedicated Circuit (A)	20
Rated Power (W)	4200 / 3200
Supply (Hz)	60
Voltage (V)	208 / 240

Note: Multiple product installation requires the design of power outlets according to local regulations.

2	
COMPACT CONVECTION-SPEED OVEN	
Connection	Hard-wired
Location	70 7/8" (1800mm) upper left
ELECTRICAL	
Dedicated Circuit (A)	20
Rated Power (W)	3300 / 3900
Supply (Hz)	60
Voltage (V)	208 / 240

3	
WARMING DRAWERS	
Connection	Flex cord
Location	70 7/8" (1800mm) upper right
ELECTRICAL	
Dedicated Circuit (A)	15
Rated Power (W)	930
Supply (Hz)	60
Voltage (V)	120

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

