


Hooker Style-EC591

Assembly Instructions

Carefully unpack all parts and identify them with parts list before attempting to assemble the chair.

IMPORTANT: DO NOT TIGHTEN BOLTS AND SCREWS FULLY UNTIL YOU HAVE COMPLETED THE FINAL ASSEMBLY.

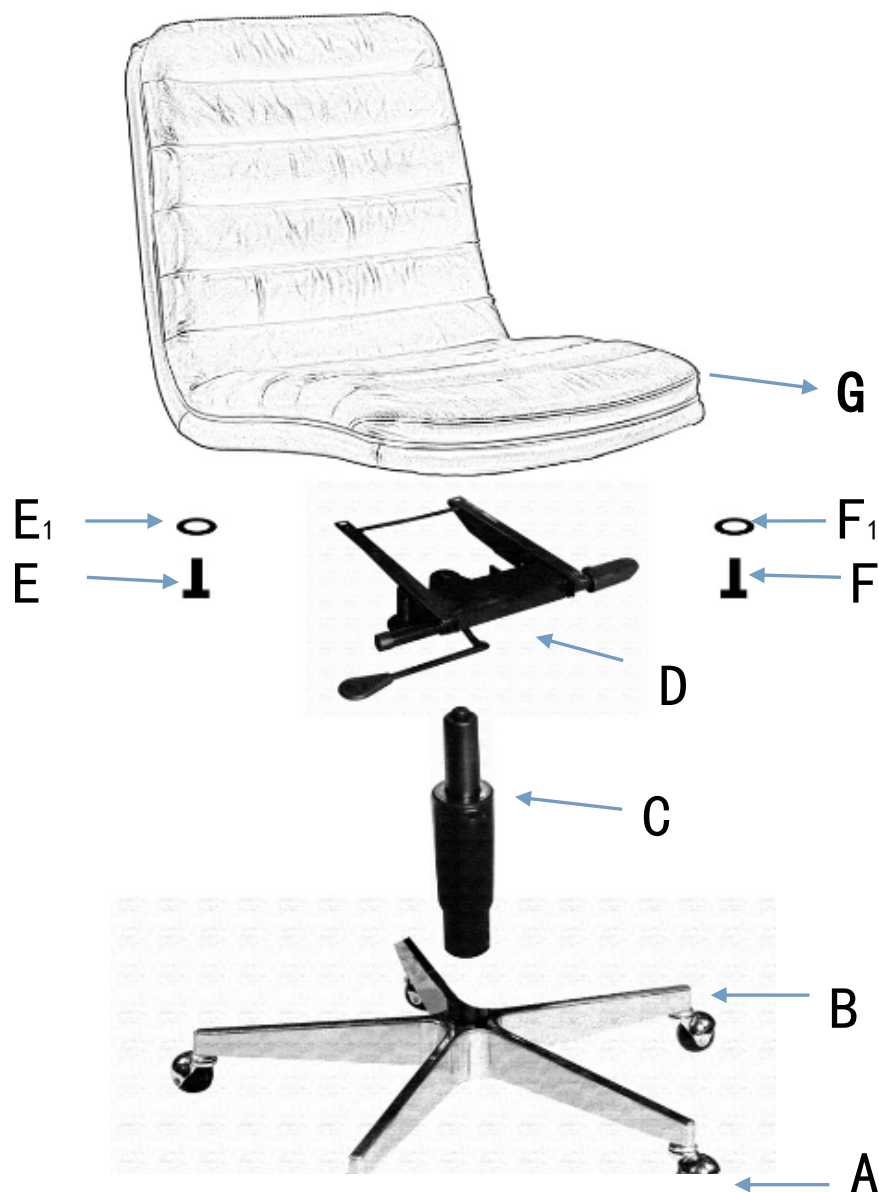

1. Carefully remove the 5 STAR BASE(B) from the carton. The base is located behind the fiberboard that is behind the chair UNIT SEATING(G).
2. Put 5 CASTERS (A) into the holes of 5 STAR BASE (B).
3. Insert GAS LIFT (C) to the center hole top of 5 STAR BASE (B).
4. Attach SEAT PLATE (D) to the Unit Seating(G) by using 4 SCREWS (E and F) with 4 FLAT WASHERS (E1 and F1).
5. Insert the pre-assembled seat unit onto the gas lift to finish the final assembly.
6. Be sure that all the screws are fully tightened before using.

Parts List

A.	CASTERS	5
B.	5 STAR BASE	1
C.	GAS LIFT	1
D.	SEAT PLATE	1
E.	SCREWS (5/16"X1¼")	2
E1.	FLAT WASHERS	2
F.	SCREWS (5/16"X1")	2
F1.	FLAT WASHERS	2
G.	UNIT SEATING	1

