

Apartment Refrigerators

FFTR1222Q M/W/V/B

Frost Free
12 Cu. Ft. Top Mount



Signature Features

Store-More™ Freezer

Easy-to-access freezer includes a shelf and door rack.

SpaceWise® Adjustable Glass Shelves

Easily adjust shelves up and down to create more space for taller items.

Independent Temperature Controls

Store-More™ Clear Crisper Drawers

Keep your fruits and vegetables fresh in our crisper drawers.

Product Dimensions

A - Height	59-7/8"
B - Width	24"
C - Depth (Including Door)	28-7/8"
D - Depth with Door Opened 90°	50-1/2"

More Easy-To-Use Features

Reversible Door-Swing Option

Door can be installed to open left or right based on your needs.

Bright Lighting

Our bright lighting makes it easy to see what's inside.

Static Condenser

Square Door Design

Color-Coordinated Door Handle

Color-Coordinated Smooth Cabinet Finish

Color-Coordinated Door Hinge Covers

A.D.A.-Compliant²

With accessible shelving, and controls that are positioned within arm's reach and allow one-hand operation, our top-freezer refrigerator is A.D.A.-Compliant.



Available in:



Silver Mist
(M)



White
(W/V)



Black
(B)


¹Left-Swing Door.

²When properly installed, this model is A.D.A.-qualified based on the Uniform Federal Accessibility Standards, the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines, and the Department of Justice's 2010 A.D.A. Standards for Accessible Design, exclusive of the auxiliary airflow adjustment mechanism in the freezer, which is factory pre-set for optimal energy performance.

A diagram of a rectangular container with a curved bottom. The container is labeled "WALL" at the top. The height of the container is labeled "D". The width of the container is labeled "B". The height of the curved bottom section is labeled "C". The curved bottom is shown as a dashed line. A small triangle is shown at the bottom right corner of the container.



Specifications
subject to change.

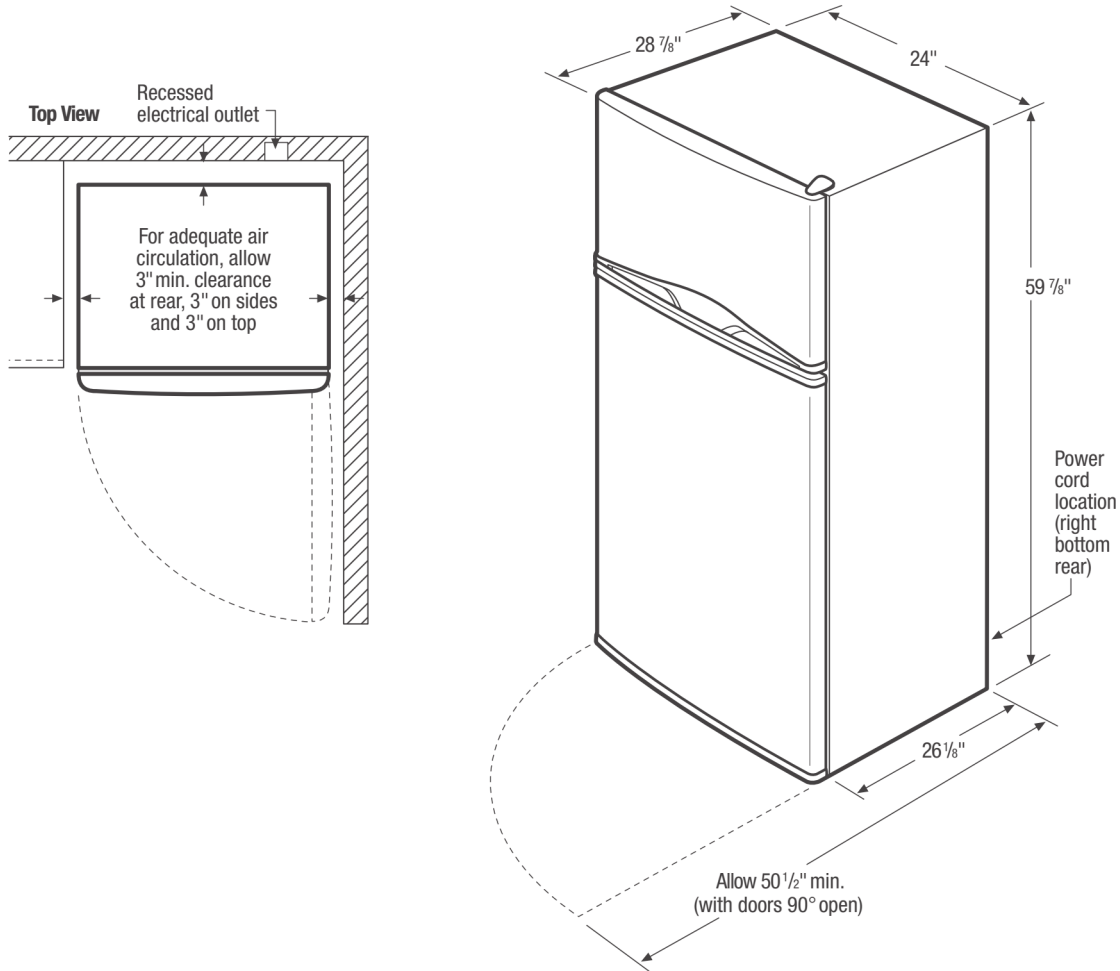

Apartment Refrigerator Specifications

- Product Shipping Weight (approx.) - 153 Lbs.
- Voltage Rating - 115V/60 Hz/15 or 20 Amps
- Always consult local and national electric codes.
- For adequate air circulation, allow 3" minimum clearance at rear, 3" on sides and 3" on top.
- Locate where surrounding air temperature will not exceed 110° F or drop below 10° F, to ensure optimum performance.

- All bottom corners of unit MUST rest firmly on solid level surface of hard material, same height as flooring. Surface must be strong and stable enough to support unit when fully loaded.
- Equipped with adjustable leveling legs to ensure unit is level, which is required in order to function properly.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.