

URD3753

Undercounter double drawer refrigerator

LIEBHERR

Refrigeration and Freezing

G German
Engineering



home.liebherr.com

URD3753	
Energy consumption (kWh / y)	220
Estimated Yearly Energy Cost in US \$	31
Sound rating dB(A)	34
Refrigerator capacity cu.ft. (l)	4.1 (115)
Defrost type	Automatic
Electronic control	Touch&Swipe
Interior light	LED zone light
Number of drawers	2
Temperature range	34 to 46°F (2 TO 9°C)
Number of temperature zones	2 independent zones
Door alarm	Yes
Door type	Panel ready
SoftSystem	Yes
Door hinges	Pull-out
Product dimensions	
in inch (H / W / D)	33 13/16 / 23 1/2 / 21 15/16
in cm (H / W / D)	85.9 / 59.7 / 55.6
Cut out dimensions	
in inch (H / W / D)	33 7/8 - 36 1/4 / 24 / 22
in cm (H / W / D)	86-92 / 60 / 56
Net weight lbs. (kg)	94.8 (43)
Voltage V / Hz	115/60



Accessories

Air Filter	9882460
Square Aluminum Handle	9901561
Round Stainless-Steel Handle	9904734
Stainless-steel panels	9904860
Height-adjustable stainless-steel toe kick	7742874

Features


Duo Cooling	DuoCooling independent refrigeration systems provide precise temperature control and superior performance, efficiency and food preservation.
Power Cooling	The fan – as powerful as it is quiet – distributes the cold air efficiently throughout the entire refrigeration compartment.
Touch & Swipe-Display	Pressing buttons is a thing of the past. The Touch & Swipe display makes operation very simple and intuitive.
Vario Cool Drawers	The VarioCool drawers offer customizable cooling zones, allowing you to adjust the temperatures in each drawer independently
Super Cool	Generates greater cold reserves so that freshly stored food can be rapidly chilled. Reversion from the chilling temperature of +35.6°F to the normal refrigeration temperature.
Super Quiet	Noise levels are kept to a minimum thanks to virtually silent, speed-controlled, and sound absorbing compressors.
Smart Device ready	The SmartDeviceBox can be installed in just a few steps and will open up the whole world of digital possibilities to you today.

* Energy Cost will depend on utility rates and use. Estimated energy cost based on a national average electricity cost of 14 cents per kWh.

** Noise output – according to EN 60704-3

Diagrams

Product and Cut out Dimensions

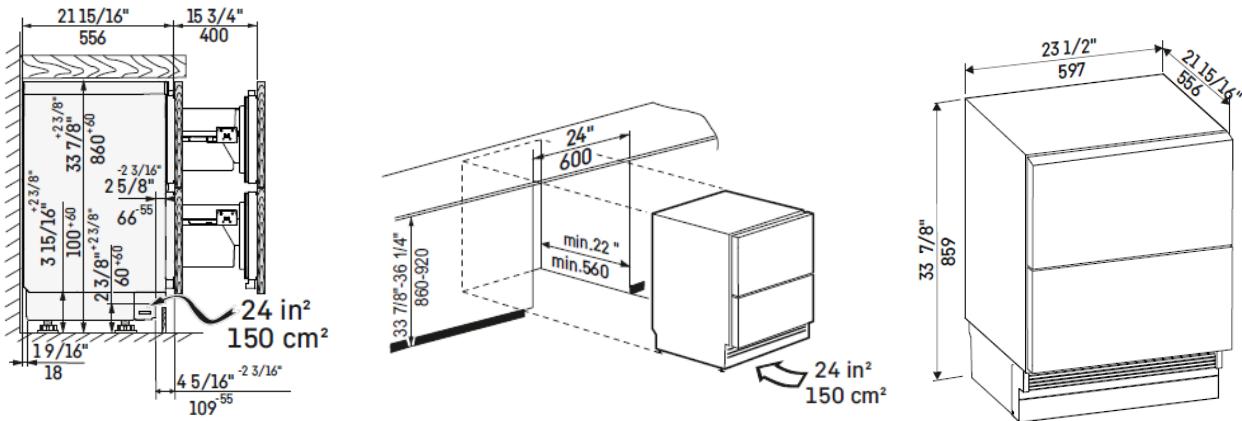


This is a fully integrated undercounter model which means that it is fully enclosed by a kitchen cabinet. This type of cabinet must be carefully constructed using the correct dimensions and it must provide suitable ventilation to ensure proper appliance operation. The floor on which the appliance stands must be horizontal, and level and the kitchen cabinets must be aligned horizontally and vertically.

The power cord exists the rear of the appliances and has a length of 6.5 ft (2m). We recommend the electrical outlet not be situated behind the appliance and be easily accessible.

The under counter can be installed in a standard niche of 34" up to taller niche of 36". Height can be adjusted in a range of 2 3/8" (60mm) by turning the leveling feet.

To ensure proper refrigeration performance of the appliance, designed ventilation is required. The toe kick installation will be different depending on the cabinets where the appliance is installed. A toe kick panel will be required to cover the gap between the ventilation grill and the floor.

Door Panel Dimensions

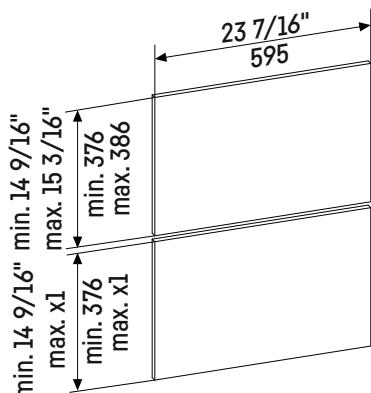

Custom panels should be at least 5/8"(16mm) and a maximum of 3/4"(19mm) thick.

Maximum value must not exceed the maximum ventilation cross-section of 24 in² (150 cm²).

Panel and handle max weight is:
Maximum weight of each custom panel door is 11 lbs. (5kg).

If using a "shaker style" panel that undershoots the minimum panel thickness, please be aware that you will need to use shorter screws than on standard thickness panels..