



## Coin Slide

#### **Built for Reliable Performance**

Speed Queen's Coin Slide operated top load washer gives building owners and property managers unparalleled ability to reduce water and energy costs which reduces operating costs. With features such as water and energy efficient designs, quality internal components and high security systems, multi-housing owners can depend on Speed Queen. The equipment gives them the advantage on such issues as energy conservation, equipment breakdowns and vandalism. Durable porcelain enamel tops and lids resist corrosion and scratching, assuring long-last appearance.



- · Durable stainless steel wash tub
- · Extract speed of 710 RPM spins clothes out drier
- Automatic Balancing Suspension provides the industry's best outof-balance handling, completing wash cycles without interruption
- Curved four-vane polypropylene agitator provides 210° agitation stroke which delivers superior washability
- · Dependable, Eversmooth transmission



#### Coin Slide Control


Coin Slide control is easy to use and offers the basic features needed for optimal coin-vended laundry room operations.

# Top Load Washer

### Coin Slide

| Considerations   |   |
|--|---|
| Specifications   |   |
| Control Option   | Coin Slide  |
| Color  | White   |
| Capacity - lb (kg)   | 16 (7.3)  |
| Cylinder Volume - cu. ft. (liters)   | 3.19 (90.3)   |
| Spin Speed G-Force (RPM)   | 150 (710)   |
| Motor Size - HP (kw)   | 0.5 (0.37)  |
| Water Consumption Per Cycle - g (liter)  | 28.07 (106)   |
| IWF (WATER FACTOR) - gal/ft³<br>(liters/liter/cycle)                           | 8.8 (1.18)  |
| MEF <sub>J2</sub> (Modified Energy Factor)<br>ft³/kWh/cycle (Liters/kWh/cycle) | 1.35 (38.2)   |
| Cycle Selections   | Normal Hot,<br>Normal Warm,<br>Normal Cold<br>Delicate, Perm Press<br>Cold, Perm Press Warm |
| Electrical Requirements (v/Hz/Ph-Amp)  | 120/60/1 - 15 Amp   |
| Water Pressure - p.s.i. (bar)  | 20-120 (1.4/8.3)  |
| Drain  | Pump  |
| Cylinder Finish  | Stainless Steel   |
| Net Weight - Ib (kg)   | 206 (93)  |
| Shipping Weight - lb (kg)  | 214 (97)  |
| Widt   | h 28 (711)  |
| Shipping Dimensions<br>Approx in (mm) Dept                                     | h 30 (762)  |
| Heigh  | t 45 (1143)   |
| Agency Approvals   | cULus   |
| -  |   |

| Models          | Actuation  |          |
|-----------------|------------|----------|
| SWNSX2SP115TW02 | Coin Slide | <b>.</b> |

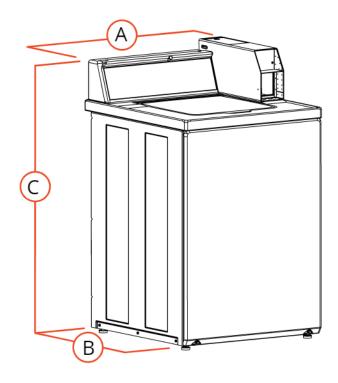

| Α. | Overall Width - in (mm)  | 25.625 (651)  |
|----|--------------------------|---------------|
| В. | Overall Depth - in (mm)  | 28 (711)      |
| C. | Overall Height - in (mm) | 43.875 (1114) |

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.