
MONTERREY® TWO-HANDLE TOP-MOUNT KITCHEN FAUCET WITH LAMINAR FLOW IN BASE OF SPOUT

RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH

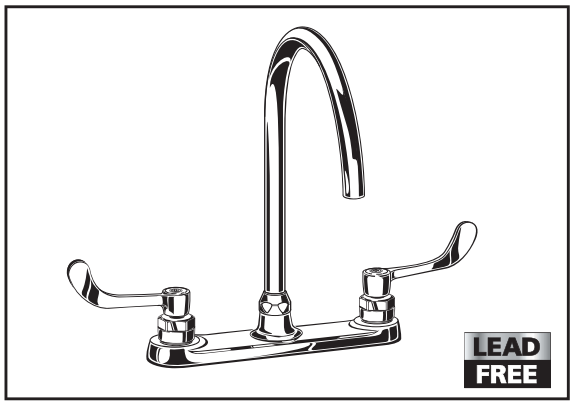


6409.180 Shown

MODEL NUMBER:

❑ **6409.180 Top Mount Faucet with 8" Gooseneck Spout & Laminar Flow in Spout Base**

Field-convertible rigid / swivel gooseneck spout. Vandal-resistant metal wrist blade handles with red/blue indexes. 1.5 gpm pressure compensating laminar flow device in the base of the spout. Plain spout end.

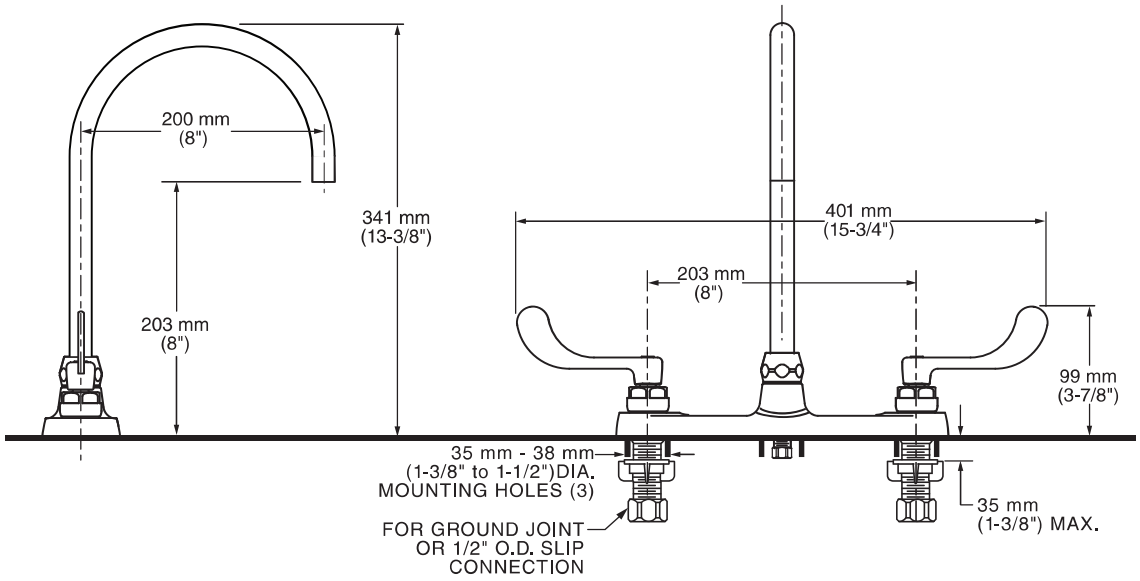

GENERAL DESCRIPTION:

Durable cast brass construction. Field-convertible rigid-swivel gooseneck spout with 8" reach. Plain spout end. 1/4 turn ceramic disc valve cartridges. 1/2" male threaded inlet shanks with shank nuts and brass coupling nuts. Vandal-resistant wrist blade handles with blue & red color indexes. 1.5 gpm/5.7 L/min. maximum flow rate.

PRODUCT FEATURES:

Laminar Flow in Spout Base: Ideal for hospital applications. Eliminates the mix of air & water.

Plain Spout End: Nothing on the end of the spout to collect lime & debris.

Ceramic Disc Valve Cartridges: Assure a lifetime of drip-free performance.

Field-Convertible Rigid / Swivel Gooseneck Spout

Solid Brass Construction: Durable. Excellent in high use applications. Ideal for prolonged contact with water.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION:

Two handle top-mount kitchen faucet shall feature cast brass construction with all brass coupling nuts. Shall feature water-conserving 1.5gpm/5.7 L/min. pressure compensating laminar flow device in base of spout. Shall also feature brass, field-convertible gooseneck spout with 8" reach and plain spout end. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model #6409.180.002.

© 2016 AS America Inc.


MONTERREY® TWO-HANDLE TOP-MOUNT KITCHEN FAUCET WITH LAMINAR FLOW IN BASE OF SPOUT

RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1
CSA B125.1
NSF 61/Section 9, Annex G
CALGreen

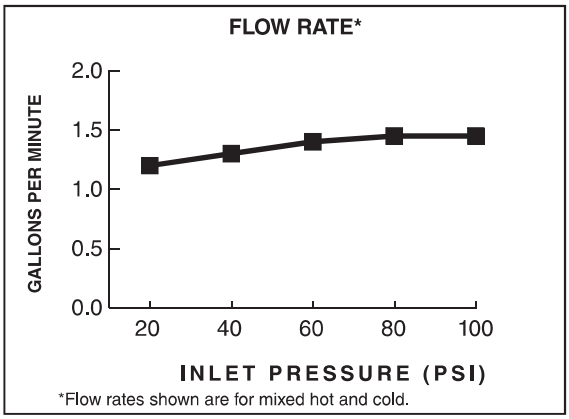

*Flow rates shown are for mixed hot and cold.

Product Number	Description	Finish: Polished Chrome 002
6409.180	Top mount faucet with field-convertible 8" rigid / swivel spout. VR wrist blade handles. 1.5 gpm pressure compensating laminar flow device in the base of the spout. Plain spout end.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

Part Suffix	Description
L10	1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet

© 2016 AS America Inc.