


GE Zoneline® Heat Pump Unit, 230/208 Volt



Model# AZ65H15DAB

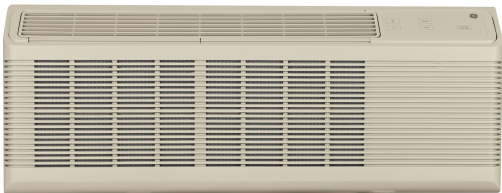

- Cooling capacity - 14,400/14,200 BTU
- Energy efficiency - 10.6/10.6 EER
- Dehumidification - 4.8 pints/hour
- Reverse heat cycle - 13,400/13,300 BTU
- Heat pump efficiency - 3.3/3.3 COP
- Indoor fan CFM (high/low) - 449/290
- Fresh air vent CFM (fully open high fan) - 44
- Quiet operation - Baked-on mastic sound barrier, cross flow blower and two DC fan motors create less noise to ensure comfort
- Heat & Freeze Sentinels - Keeps the room from overheating or freezing
- Boost heat option - Provides supplemental resistance heat in heat pump mode
- Electronic temperature limiting - Prevents expensive over-cooling or over-heating of the room
- - Electronic touch controls with LED display
- - R-410A refrigerant
- - SMC base pan
- Simplified structure - Easy to maintain and service

FEATURES

| | |
|-----------------------------------|--|
| Sensible Heat Ratio | 60% |
| Chassis Type | Slide-In |
| Control Type | Standard Microcomputer; Tactile touch pad with LED Display |
| Discharge Grille | 2-position |
| Electronic Micro Computer Control | Yes |
| Fan Cycle Switch | Yes |
| Fan Motor | 2 |
| Fan Speed Control | Yes |
| Fan Speed Selections | Hi/Low Cooling; Hi/Low Fan Only; Hi/Low Heating |
| Filter Type | Rigid Frame; Slide-Out |
| Heat - Cool | Yes |
| Louver Style | Reversible |
| Manual Vent Control | Hidden |
| Rotary Compressor | Yes |
| Temperature Limiting | Electronic 7-Step |
| Vent Control | 3-position |
| Venting Features | Concealed Manual Vent Control; Outdoor Vent Control - 3 Positions; Vent Air Filter |
| Zoneline Features | "Sleep" Mode; "Smart Fan" Fan Cycle Control; 3-Stage Heating Design; Auto Power Recovery; Automatic Emergency Heat; Automatic Indoor Frost Control; Central Desk Control Compatibility; Freeze Sentinel; Heat Pump with Resistance Heat Backup; Heat Pump with Supplemental Resistance Heat; Heat Sentinel; LCDI Power Cord (purchased separately); Proportional - Integral ID Airflow; Quick Heat Recovery; Random Twist/Length Segment Tangential Blower; Remote Thermostat Compatibility; Reverse Cycle Defrost; Universal Heaters; Weather Protected Electrical Components |
| Product Type | Packaged Terminal Air Conditioners (PTAC) |
| Temperature Range | 60 - 85 F |

Have more questions? Please contact 1-800-626-2005

GE Zoneline® Heat Pump Unit, 230/208 Volt



Model# AZ65H15DAB

APPROXIMATE DIMENSIONS (HxDxW)

- 16 in x 20 13/16 in x 42 in

CAPACITY

- Cooling BTUH (MIN) 14200.00 Btu
- Cooling BTUH (MAX) 14400.00 Btu
- Cooling EER (BTUH / Watt) 10.6/10.6
- CFM Indoor Fan High 400
- CFM Indoor Fan Low 290
- Dehumidification (pts./hr.) 4.80
- Heating - Reverse Cycle - BTUH 13400/13300
- Vent CFM (high fan at zero ESP) 44

WARRANTY

- Parts Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Labor Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Warranty Notes - See written warranty for full details

Have more questions? Please contact 1-800-626-2005