

Features

Meets requirements for
efficiency rebates

Glowing ceramic ember
base and logset

ILLUME

CONTEMPORARY

EFFICIENTLY ELEGANT

ILLUME INSERTS CONTEMPORARY

30FID
34FID

CO-LINEAR
INSERT

Standard

Contemporary burner

Multi-function
remote control

Black porcelain liner

Halogen uplighting

Remote Hi-Lo flame

Battery backup

Micro mesh screen

Options

Propane conversion kit

Remote controlled fans

Square, oversized or 4
sided surround[†]

Speckled stones,
driftwood, glass media[†]

WiFi phone app control

QUICK DIMENSIONS

	30FID		34FID	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	29½	N/A	33½	N/A
B.WIDTH	19⅞	N/A	23⅞	N/A
HEIGHT	20	N/A	23¾	N/A
DEPTH	13½	N/A	14½	N/A
VIEWING	24¼ × 14½		28¾ × 18⅞	

[†]Required to complete install

BTU LISTING

30FIDNIL-01 / 24,000
30FIDLIL-01 / 23,000

34FIDNIL-01 / 31,000
34FIDLIL-01 / 30,000

EFFICIENCY (P4)


30FIDNIL-01 / 77.6%
30FIDLIL-01 / 79%

34FIDNIL-01 / 77.4%
34FIDLIL-01 / 78.5%





ILLUME DIMENSIONS

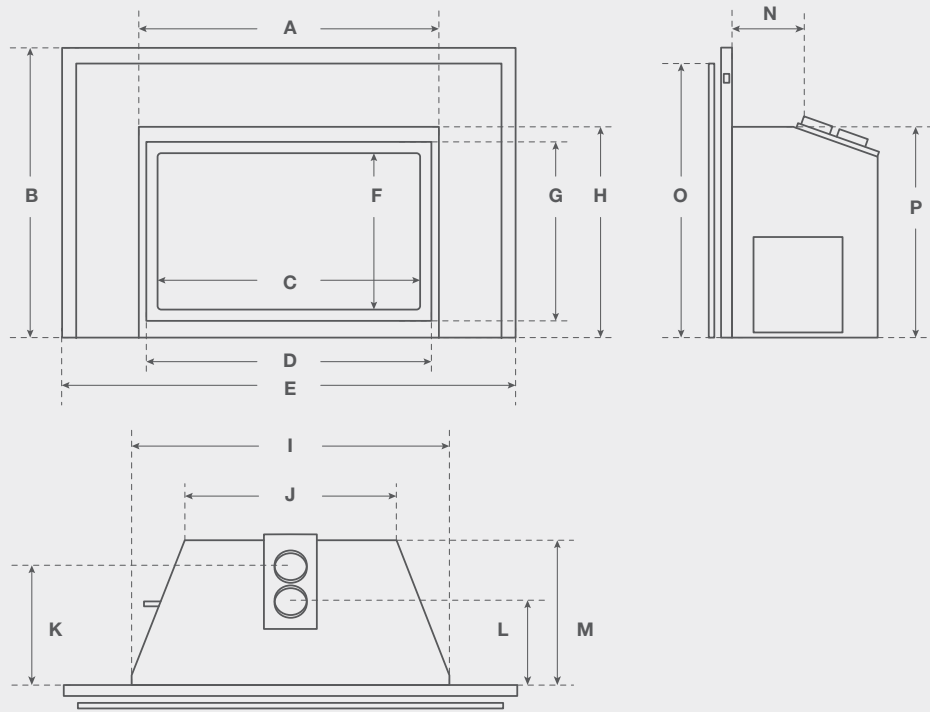

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
30FID	27 $\frac{3}{4}$	26 $\frac{5}{8}$	24 $\frac{1}{4}$	26 $\frac{1}{4}$	42	14 $\frac{1}{4}$	16 $\frac{5}{8}$	19 $\frac{1}{2}$	29 $\frac{1}{2}$	19 $\frac{5}{8}$	11 $\frac{1}{4}$	8	13 $\frac{1}{2}$	6 $\frac{3}{4}$	25 $\frac{3}{8}$	20
34FID	31 $\frac{3}{4}$	31	28	38 $\frac{3}{8}$	46 $\frac{1}{2}$	17 $\frac{1}{2}$	20 $\frac{5}{8}$	23 $\frac{3}{8}$	33 $\frac{1}{2}$	23 $\frac{3}{8}$	12 $\frac{3}{8}$	8 $\frac{5}{8}$	15	6 $\frac{3}{4}$	29 $\frac{1}{2}$	23 $\frac{3}{4}$

MONTIGO / ILLUME / 34FID / CONTEMPORARY

MONTIGO / ILLUME / 30FID / CONTEMPORARY



REMOTE^Δ
RXM5010



WALL REMOTE
EC1550



WIFI PHONE APP
CONTROL
SIT-WIFI



BLACK PORCELAIN^Δ
PPL**

^Δ Standard on
contemporary inserts

Unit Specifications

ICON LEGEND			
AVAILABLE	+	NOT AVAILABLE	-
DEDICATED	◊	STANDARD	◦

	BTU	GAS SUPPLY PRESS. (NG (SHOWN IN W.C.))	VENTING	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
30FIDN-L-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	NEOCERAMIC	NONE	-	◦	+	◦	-
30FIDL-L-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	NEOCERAMIC	NONE	-	◦	+	◦	-
30FIDN-S-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	NEOCERAMIC	TRADITIONAL	-	◦	+	-	◦
30FIDL-S-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	NEOCERAMIC	TRADITIONAL	-	◦	+	-	◦
34FIDN-L-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18¾	NEOCERAMIC	NONE	-	◦	+	◦	-
34FIDL-L-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18¾	NEOCERAMIC	NONE	-	◦	+	◦	-
34FIDN-S-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18¾	NEOCERAMIC	TRADITIONAL	-	◦	+	-	◦
34FIDL-S-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18¾	NEOCERAMIC	TRADITIONAL	-	◦	+	-	◦

ILLUME MASONRY CAVITY (MINIMUM)

	A	B	C	D	E
30FID	20	14	30	20	5
34FID	24	15	34	24	6

