

#### CND TEPPANYAKI GRILL TABLE SPECIFICATIONS

models/sizes:

TS-35 | 35-1/2" Ø x 28¾" H ( 90 cm x 73 cm)

TS-47 | 47" Ø x 28¾" H (120 cm x 73 cm)

~346 sq/inch **HOT cooking center incl. warming**

#### INDOOR + OUTDOOR USE | IPX4 RATED

Material: Professional Food Grade Best Alloy  
German Stainless Steel type 304 (V2A)  
5/32" thick (4 mm) cold pressed, hand-welded.  
Built-to-last. Elegant silk-brushed finish.

Power: **1800 Watt** | 1.8 kWh on high

Electric: **120V** | **50-60 Hz** | **20 AMP**

**ProStyle 2250 Watt** | **240V** | **10 AMP**

Analog infinitely variable temperature control:

1-10 dial | 2 indicator lights | thermostat

**Contact Heat: 130°F to 450°F (55° to 230°C)**

**5 Year Limited Manufacturer Warranty** on  
Material + Craftsmanship.

**2 Year limited manufacturer Warranty**  
with online registration parts & labor.  
VDE issued European Safety Approval.

Electrical + Electronic  
Components: UL approved.



For full warranty, policies and details refer to  
<https://www.cook-n-dine.com>

To register the appliance for 12 months  
additional warranty protection, scan the QR  
code or go to [www.der-heisse-fisch.de](http://www.der-heisse-fisch.de)



- 1 COLD DINING AREA
- 2 HOT COOKING CENTER
- 3 POWER CORD RECEPTACLE at rear of control box
- 4 INDICATOR LIGHTS control box



Manufacturer reserves the right to alter, update or discontinue any model without further notice.


**Shipping Weight per skid/ea:**

TS-35: approx. 220 lbs (100 kg)

TS-47: approx. 287 lbs (130 kg)



Stainless steel production uses up to 80% recycled raw material

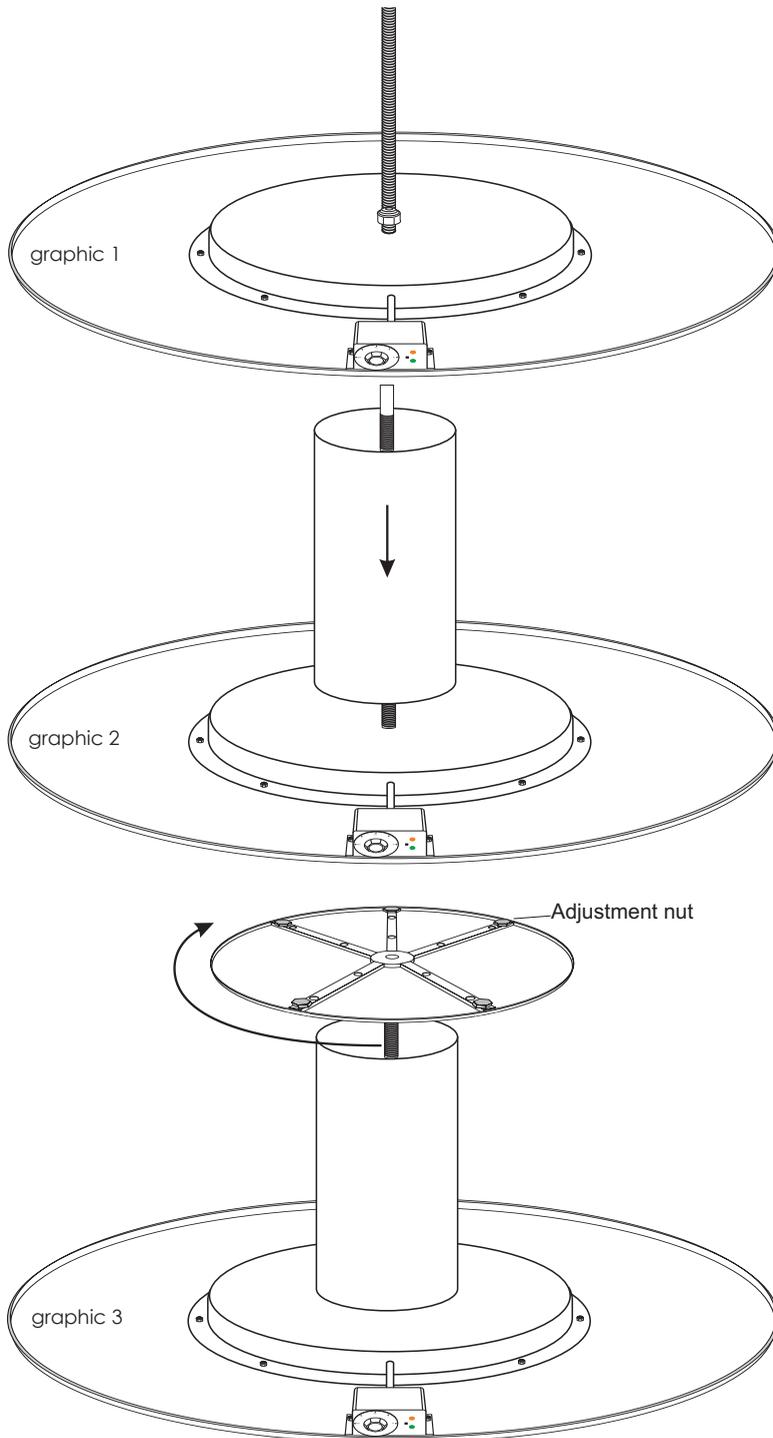

**Step 1:** Open the box/remove lid. Tabletop is laying bottom up in the box. Remove packaging from threaded rod (packed separately).

Leave tabletop in the box to protect the surface from scratching during assembly.

If provided, place metal plate on top of the heating element enclosure and align the holes. Insert the threaded rod (nut down) into the designated centered hole. Turn the rod clockwise until hand-tight and nut is flush with the heating element. Do not use power tools! (graphic 1).

**Step 2:** Slide the stand (tube) over the threaded rod, guiding the rod carefully through the designated holes in each inner brackets at either end of the stand/tube. (graphic 2)

**Step 3:** Turn the pedestal disk upside down, position the designated hole on top of the threaded rod. Turn pedestal clockwise while supporting it with your hands until it is firmly connected with the stand and the top of the table.

**Step 4:** Turn the now fully assembled table to its upright position and level it by rising or lowering the respective adjustment nuts at the underside of the pedestal disk. Check voltage label. Now connect the power cord to table and then to respective three prong grounded power outlet.



### SHALLOW-DIP-TECHNOLOGY + CONTACT HEAT

#### 5 Year Limited Manufacturer Warranty

Electrical + electronic parts:  
2 year limited manufacturers'.

CE + GS/ VDE issued European  
Safety Certifications



Electrical + electronic  
Components: UL approved.


#### INDOOR + OUTDOOR IPX4 RATED

Material:  
Professional Food Grade Premium  
German Stainless Steel type 304  
8-10 gauge | 1/8" - 5/32" | 4-5 mm thick  
Cold pressed + hand-welded  
Silk-brushed Finish.

Power: **1800 Watt** | 1.8 kWh on high  
Electric: **120V** | **50-60 Hz** | **20 AMP**

**ProStyle 2250 Watt** | **240V** | **10 AMP**

Analog Temperature Control:  
1-10 dial with thermostat  
2 LED control lights

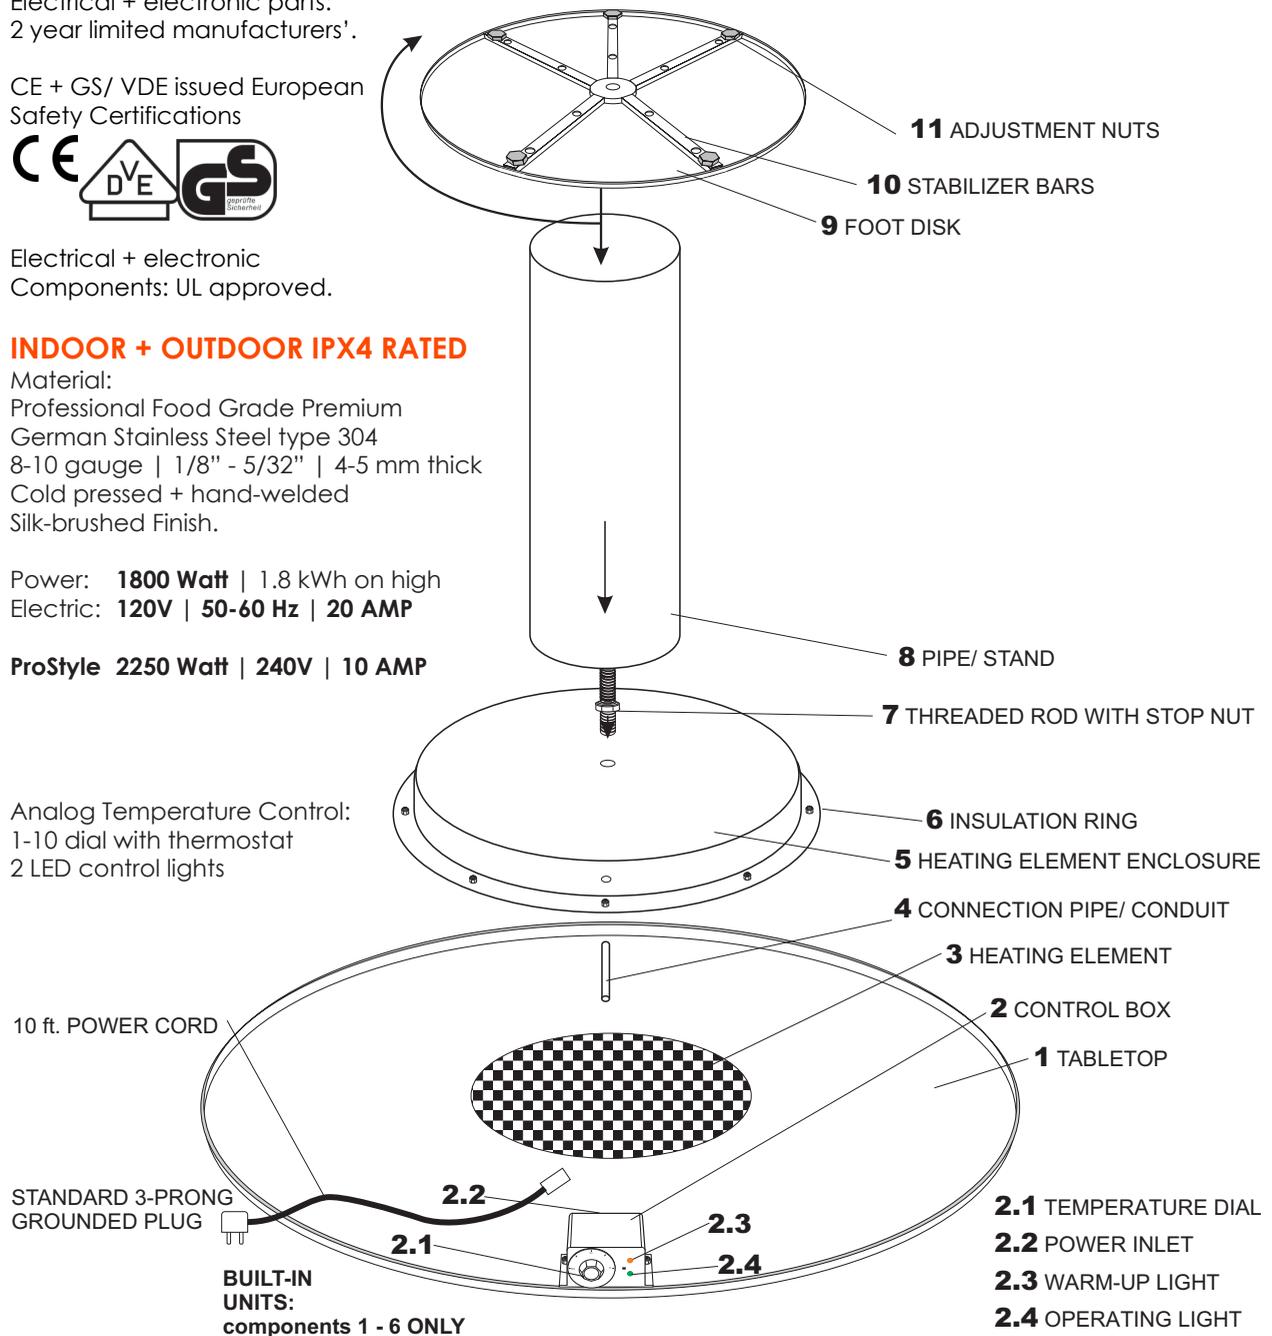

**BUILT-IN UNITS:**  
components 1 - 6 ONLY

- 2.1** TEMPERATURE DIAL
- 2.2** POWER INLET
- 2.3** WARM-UP LIGHT
- 2.4** OPERATING LIGHT