




Performance


- 400 CFM Integrated Blower included
- Recirculation possible with kit RECIRC__FS (max 600CFM)
- Three fan speeds
- Dishwasher safe aluminum mesh filters
- Filter systems are highly efficient at capturing grease
- Extended capture area ensures removal of smoke and odor
- Powerfully quiet ventilation systems
- 8" Round duct size
- Vertical or horizontal ducting direction
- Hood includes filters, lights, backdraft damper and transition
- Replacement charcoal filters available (CHFILT3036)
- Accessories include: Stainless steel duct covers in 6" or 12" heights

Design

- See what's cooking with brilliant incandescent lights
- Brushed stainless steel finish
- Double wall construction
- Stainless steel button controls
- Welded, polished seams for a flawless design

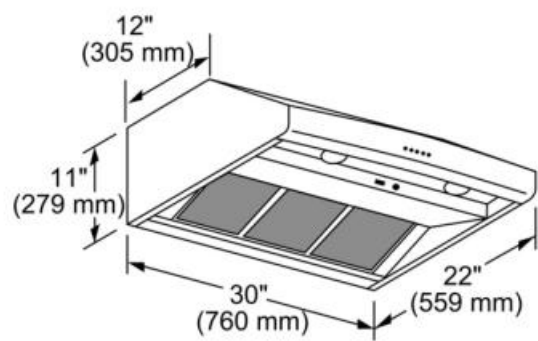

measurements in inches and mm

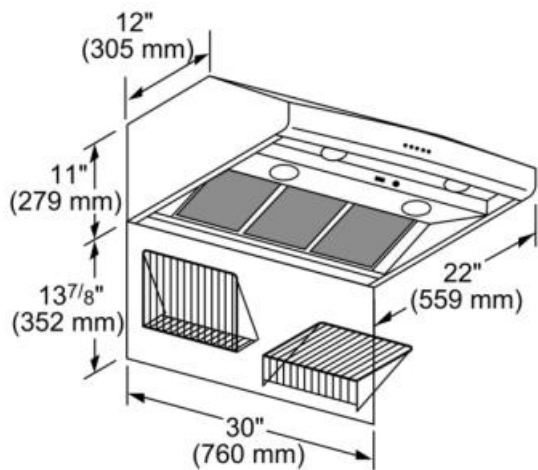

measurements in inches and mm

Approval certificates	UL
Net weight (lbs)	43
Gross weight (lbs)	48
Required distance above range/rangetop/cooktop	24"/30"
Motor location	N/A
Diameter of air duct (in) top	8
Operating mode	Convertible: Ducted / Recirculating
Number of lights	2
Type of lamps used	Bulbs
Total power of the lamps (W)	40
Grease filter material	aluminium
Grease filter type	Multilayer cassette