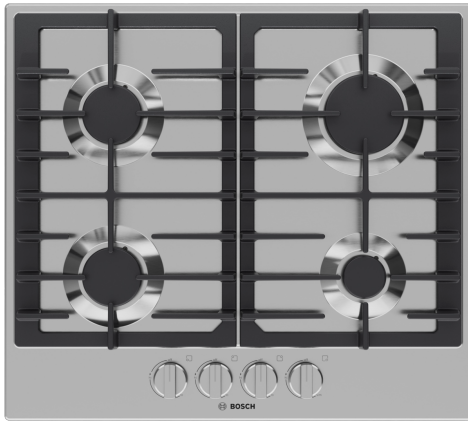## 300 Series, Gas Cooktop, Stainless steel
NGM3450UC

- **Electronic re-ignition**: automatically re-ignites the burner in case the flame goes out.
- **Easy-to-Clean**: a one-piece stainless steel design makes clean-up easy.
- **4 Burners**: 4 high-efficiency gas burners allow you to cook multiple dishes at once
- **Heavy-duty metal knobs for a premium look and feel.**
- **Low profile stainless steel cooking surface is easily accessible and quick to clean.**
- **Sealed burners prevent spills from entering the burner box**

UPC code: 825225969945
Color: ....Stainless steel
Energy source: .... Gas
Gas type: ....Natural gas 15 mbar (USA)
Alternative gas type: .... Liquid gas 27,5 mbar (USA)
Fuse protection: ....15 A
Volts: ....120 V
Frequency: .... 60 Hz
Power Cord Length: ....40"
Plug type: ....120V-3 prong
Required Cutout Size (HxWxD) (in): ....5" x 22" x 19 1/4"
Overall appliance dimensions (HxWxD) (in): ....5" x 23" x 20 1/2"
Product packaging dimensions (HxWxD): .... 5.55 x 22.75 x 25.98
Net Weight: .... 29.000 lbs
Gross weight: .... 31.000 lbs
Total number of cooktop burners: 4

4 242005 391400

300 Series, Gas Cooktop, Stainless steel
NGM3450UC

Performance

- 4 high-efficiency gas burners

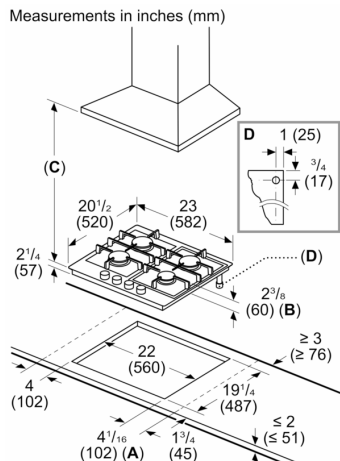**Convenience**

- Porcelain enamel on cast iron grates

Design

- Heavy-duty stainless color metal knobs for a premium look and feel
- Perfect results are within reach with up-front centralized controls

Safety

- FlameSafe thermocouple sensing device will switch off the gas supply if flame temporarily extinguishes
- LP Conversion Kit Included for Conversion from Natural Gas to Liquid Propane

300 Series, Gas Cooktop, Stainless steel
NGM3450UC

Measurements in inches (mm)

D 1 (25)
3/4 (17)

(C)

20^{1}/$_{2}$ (520)   23 (582)

2^{1}/$_{4}$ (57)

2^{3}/$_{8}$ (60) (B)

(D)

≥ 3 (≥ 76)

22 (560)

4 (102)

19^{1}/$_{4}$ (487)

≤ 2 (≤ 51)

4^{1}/$_{16}$ (102) (A)   1^{3}/$_{4}$ (45)

A: 5^{1}/$_{16}$″ (129 mm) required when installed with a built-in oven
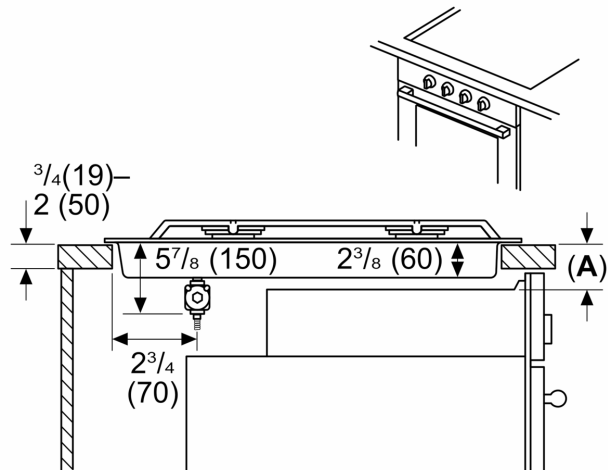
Refer to the "Bosch under cooktop built-in guide" for more details

B: Dimension from countertop to top of grates

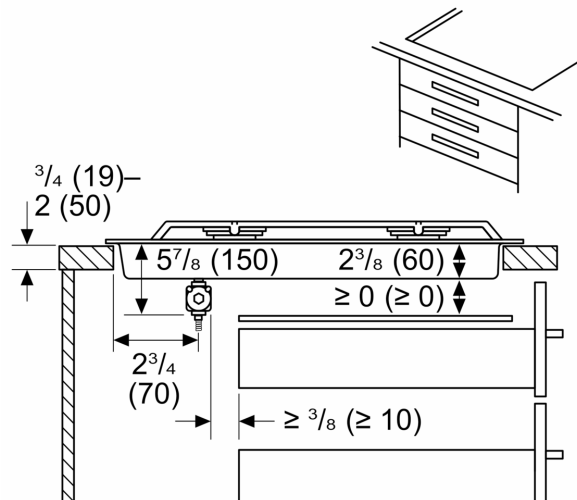**C:** When installed in combination with a hood, refer to hood manufacturer's requirements for installation

D: Gas connection

Measurements in inches (mm)
Cooktop over oven

3/4 (19)– 2 (50)

5^{7}/$_{8}$ (150)   2^{3}/$_{8}$ (60)   (A)

2^{3}/$_{4}$ (70)

A: Refer to approved combination matrix

Measurements in inches (mm)
Cooktop over drawer

3/4 (19)– 2 (50)

5^{7}/$_{8}$ (150)   2^{3}/$_{8}$ (60)

≥ 0 (≥ 0)

2^{3}/$_{4}$ (70)

≥ ^{3}/$_{8}$ (≥ 10)

Measurements in inches (mm)
Cooktop over door

3/4 (19)– 2 (50)

5^{7}/$_{8}$ (150)   2^{3}/$_{8}$ (60)

≥ 0 (≥ 0)

2^{3}/$_{4}$ (70)

1 (25)

≥ ^{3}/$_{8}$ (≥ 10)

Depth from back wall
Cabinet max. 13" (330)

Centered over cooktop
min. 24" (610)

Above counter – min. 30" (762) to
combustible surface

min.
18"(458)

Left side
min. 3" (76)

Rear wall 2" (51)

Right side
*min. 3" (76)

* 4" (102) required when installed with a built-in oven.
Reference the Bosch under cooktop
built-in guide for more details.

measurements in inches (mm)