



**SIGNATURE SERIES SHALLOW DEPTH**  
*18" Depth Refrigerator*



Glass Door Model



Solid Door Model



JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	DESCRIPTION
HH24RS-4-1R/L	Indoor Shallow Depth Refrigerator Solid Stainless Steel Door
HH24RS-4-2R/L	Indoor Shallow Depth Refrigerator Solid Panel Ready Door
HH24RS-4-3R/L	Indoor Shallow Depth Refrigerator Stainless Steel Glass Door
HH24RS-4-4R/L	Indoor Shallow Depth Refrigerator Panel Ready Glass Door
HH24RO-4-1R/L	Outdoor Shallow Depth Refrigerator Solid Stainless Steel Door
HH24RO-4-2R/L	Outdoor Shallow Depth Refrigerator Solid Panel Ready Door
HH24RO-4-3R/L	Outdoor Shallow Depth Refrigerator Stainless Steel Glass Door
HH24RO-4-4R/L	Outdoor Shallow Depth Refrigerator Panel Ready Glass Door
HH24RM-4-1R/L	Marine Shallow Depth Refrigerator Solid Stainless Steel Door
HH24RM-4-2R/L	Marine Shallow Depth Refrigerator Solid Panel Ready Door
HH24RM-4-3R/L	Marine Shallow Depth Refrigerator Stainless Steel Glass Door
HH24RM-4-4R/L	Marine Shallow Depth Refrigerator Panel Ready Glass Door

**KEY PRODUCT FEATURES AND BENEFITS**

- Industry's first 18" shallow depth for ultimate design flexibility in tight spaces
- Industry's largest selection of ADA-height compliant models for accessible and aging in place designs
- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for food and beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provide superior durability and easy cleaning
- Full extension shelving provides faster and safer product access with no reaching in the back of the cabinet; shelves fully extend on vibration dampened stainless steel ball bearing glides
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (Outdoor and Marine models only)
- Marine & Coastal Grade with Perlick Armor™ upgrades stainless steel, fasteners, and refrigeration system to the highest blend of corrosion resistance and food safety

**Quick Features:**

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready door to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 68 cans



**SIGNATURE SERIES SHALLOW DEPTH**  
**18" Depth Refrigerator**

MODEL NUMBERS		HH24RS	HH24RO	HH24RM
<b>MODEL DESCRIPTION</b>		18" Indoor Refrigerator	18" Outdoor Refrigerator	18" Marine/Coastal Refrigerator
<b>ATTRIBUTES</b>				
<b>Perlick Anti-Condensation System</b>		NO	YES	YES
<b>Energy Star Certified</b>		YES	YES	YES
<b>Perlick Armor™</b>		NO	NO	YES
<b>OVERALL DIMENSIONS</b>	<b>Width - in. (mm)</b>	23-7/8" (606 mm)	23-7/8" (606 mm)	23-7/8" (606 mm)
	<b>Depth - in. (mm)</b>	18" (457 mm)	18" (457 mm)	18" (457 mm)
	<b>Height - in. (mm)</b>	32" (813 mm)	32" (813 mm)	32" (813 mm)
<b>STANDARD OPENING DIMENSIONS</b>	<b>Width - in. (mm)</b>	24" (610 mm)	24" (610 mm)	24" (610 mm)
	<b>Depth - in. (mm)</b>	18" (457 mm)	18" (457 mm)	18" (457 mm)
	<b>Height - in. (mm)</b>	32-1/4" (819 mm)	32-1/4" (819 mm)	32-1/4" (819 mm)
<b>INTERNAL VOLUME Net. Cu. Ft.</b>		3.1 cu. ft.	3.1 cu. ft.	3.1 cu. ft.
<b>SHIPPING WEIGHT Lbs. (kg.)</b>		185 lbs (83.91 kg)	185 lbs (83.91 kg)	185 lbs (83.91 kg)
<b>ELECTRICAL SPECIFICATIONS</b>	<b>Electrical Supply</b>	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	<b>Running Load Amps</b>	1.9 amps	1.9 amps	1.9 amps
	<b>Electrical Connection</b>	Cord connected	Cord connected	Cord connected
	<b>Cord Plug Type</b>	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	<b>Cord Length</b>	6'	6'	6'
	<b>Defrost Initiation</b>	Automatic	Automatic	Automatic
	<b>Defrost Type</b>	Off cycle	Off cycle	Off cycle
	<b>Thermostat</b>	Digital	Digital	Digital
	<b>Lighting Type</b>	LED	LED	LED
<b>REFRIGERATION SPECIFICATIONS</b>	<b>Refrigerant</b>	R600a (62g)	R600a (62g)	R600a (62g)
	<b>Expansion Device</b>	Capillary Tube	Capillary Tube	Capillary Tube
	<b>Temperature Settings F°(C°)</b>	33° (0.5°) - 48° (8.8°) <b>Factory Set Point 36° (2.2°)</b>	33° (0.5°) - 48° (8.8°) <b>Factory Set Point 36° (2.2°)</b>	33° (0.5°) - 48° (8.8°) <b>Factory Set Point 36° (2.2°)</b>
	<b>Heat Rejection (at 75°F)</b>	350 BTU/hr	350 BTU/hr	350 BTU/hr
	<b>Pull Down Capacity</b>	1000 BTU/hr	1000 BTU/hr	1000 BTU/hr
	<b>Front Vented</b>	Yes	Yes	Yes
<b>PLUMBING</b>		None Required	None Required	None Required

*Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.*

**ACCESSORIES**

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67992-L/R	Stacking Kit for HH24 models
67360	6" Toe Kick and Riser

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com).



**WARNING: California Prop 65 Notice**

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at [perlick.com](http://perlick.com). Or to find out more about **Prop 65**, go to [P65Warnings.ca.gov](http://P65Warnings.ca.gov).




**SIGNATURE SERIES SHALLOW DEPTH**  
*18" Depth Refrigerator*

	CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
INDOOR	HH24RS-4-1L	HH24RS4C-00-SLF0R	Left	No
	HH24RS-4-1R	HH24RS4C-00-SRF0R	Right	No
	HH24RS-4-2L	HH24RS4C-00-PL00R	Left	No
	HH24RS-4-2R	HH24RS4C-00-PR00R	Right	No
	HH24RS-4-3L	HH24RS4C-00-TLF0R	Left	No
	HH24RS-4-3R	HH24RS4C-00-TRF0R	Right	No
	HH24RS-4-4L	HH24RS4C-00-RL00R	Left	No
	HH24RS-4-4R	HH24RS4C-00-RR00R	Right	No
	HH24RS-4-1LL	HH24RS4C-00-SLFLR	Left	Yes
	HH24RS-4-1RL	HH24RS4C-00-SRFLR	Right	Yes
	HH24RS-4-2LL	HH24RS4C-00-PL0LR	Left	Yes
	HH24RS-4-2RL	HH24RS4C-00-PR0LR	Right	Yes
	HH24RS-4-3LL	HH24RS4C-00-TLFLR	Left	Yes
	HH24RS-4-3RL	HH24RS4C-00-TRFLR	Right	Yes
	HH24RS-4-4LL	HH24RS4C-00-RL0LR	Left	Yes
	HH24RS-4-4RL	HH24RS4C-00-RR0LR	Right	Yes
OUTDOOR	HH24RO-4-1L	HH24RO4C-00-SLF0R	Left	No
	HH24RO-4-1R	HH24RO4C-00-SRF0R	Right	No
	HH24RO-4-2L	HH24RO4C-00-PL00R	Left	No
	HH24RO-4-2R	HH24RO4C-00-PR00R	Right	No
	HH24RO-4-3L	HH24RO4C-00-TLF0R	Left	No
	HH24RO-4-3R	HH24RO4C-00-TRF0R	Right	No
	HH24RO-4-4L	HH24RO4C-00-RL00R	Left	No
	HH24RO-4-4R	HH24RO4C-00-RR00R	Right	No
	HH24RO-4-1LL	HH24RO4C-00-SLFLR	Left	Yes
	HH24RO-4-1RL	HH24RO4C-00-SRFLR	Right	Yes
	HH24RO-4-2LL	HH24RO4C-00-PL0LR	Left	Yes
	HH24RO-4-2RL	HH24RO4C-00-PR0LR	Right	Yes
	HH24RO-4-3LL	HH24RO4C-00-TLFLR	Left	Yes
	HH24RO-4-3RL	HH24RO4C-00-TRFLR	Right	Yes
	HH24RO-4-4LL	HH24RO4C-00-RL0LR	Left	Yes
	HH24RO-4-4RL	HH24RO4C-00-RR0LR	Right	Yes
MARINE & COASTAL	HH24RM-4-1L	HH24RM4C-00-MLF0R	Left	No
	HH24RM-4-1R	HH24RM4C-00-MRF0R	Right	No
	HH24RM-4-2L	HH24RM4C-00-PL00R	Left	No
	HH24RM-4-2R	HH24RM4C-00-PR00R	Right	No
	HH24RM-4-3L	HH24RM4C-00-NLF0R	Left	No
	HH24RM-4-3R	HH24RM4C-00-NRF0R	Right	No
	HH24RM-4-4L	HH24RM4C-00-RL00R	Left	No
	HH24RM-4-4R	HH24RM4C-00-RR00R	Right	No
	HH24RM-4-1LL	HH24RM4C-00-MLFLR	Left	Yes
	HH24RM-4-1RL	HH24RM4C-00-MRFLR	Right	Yes
	HH24RM-4-2LL	HH24RM4C-00-PL0LR	Left	Yes
	HH24RM-4-2RL	HH24RM4C-00-PR0LR	Right	Yes
	HH24RM-4-3LL	HH24RM4C-00-NLFLR	Left	Yes
	HH24RM-4-3RL	HH24RM4C-00-NRFLR	Right	Yes
	HH24RM-4-4LL	HH24RM4C-00-RL0LR	Left	Yes
	HH24RM-4-4RL	HH24RM4C-00-RR0LR	Right	Yes



**SIGNATURE SERIES SHALLOW DEPTH**  
**18" Depth Refrigerator**

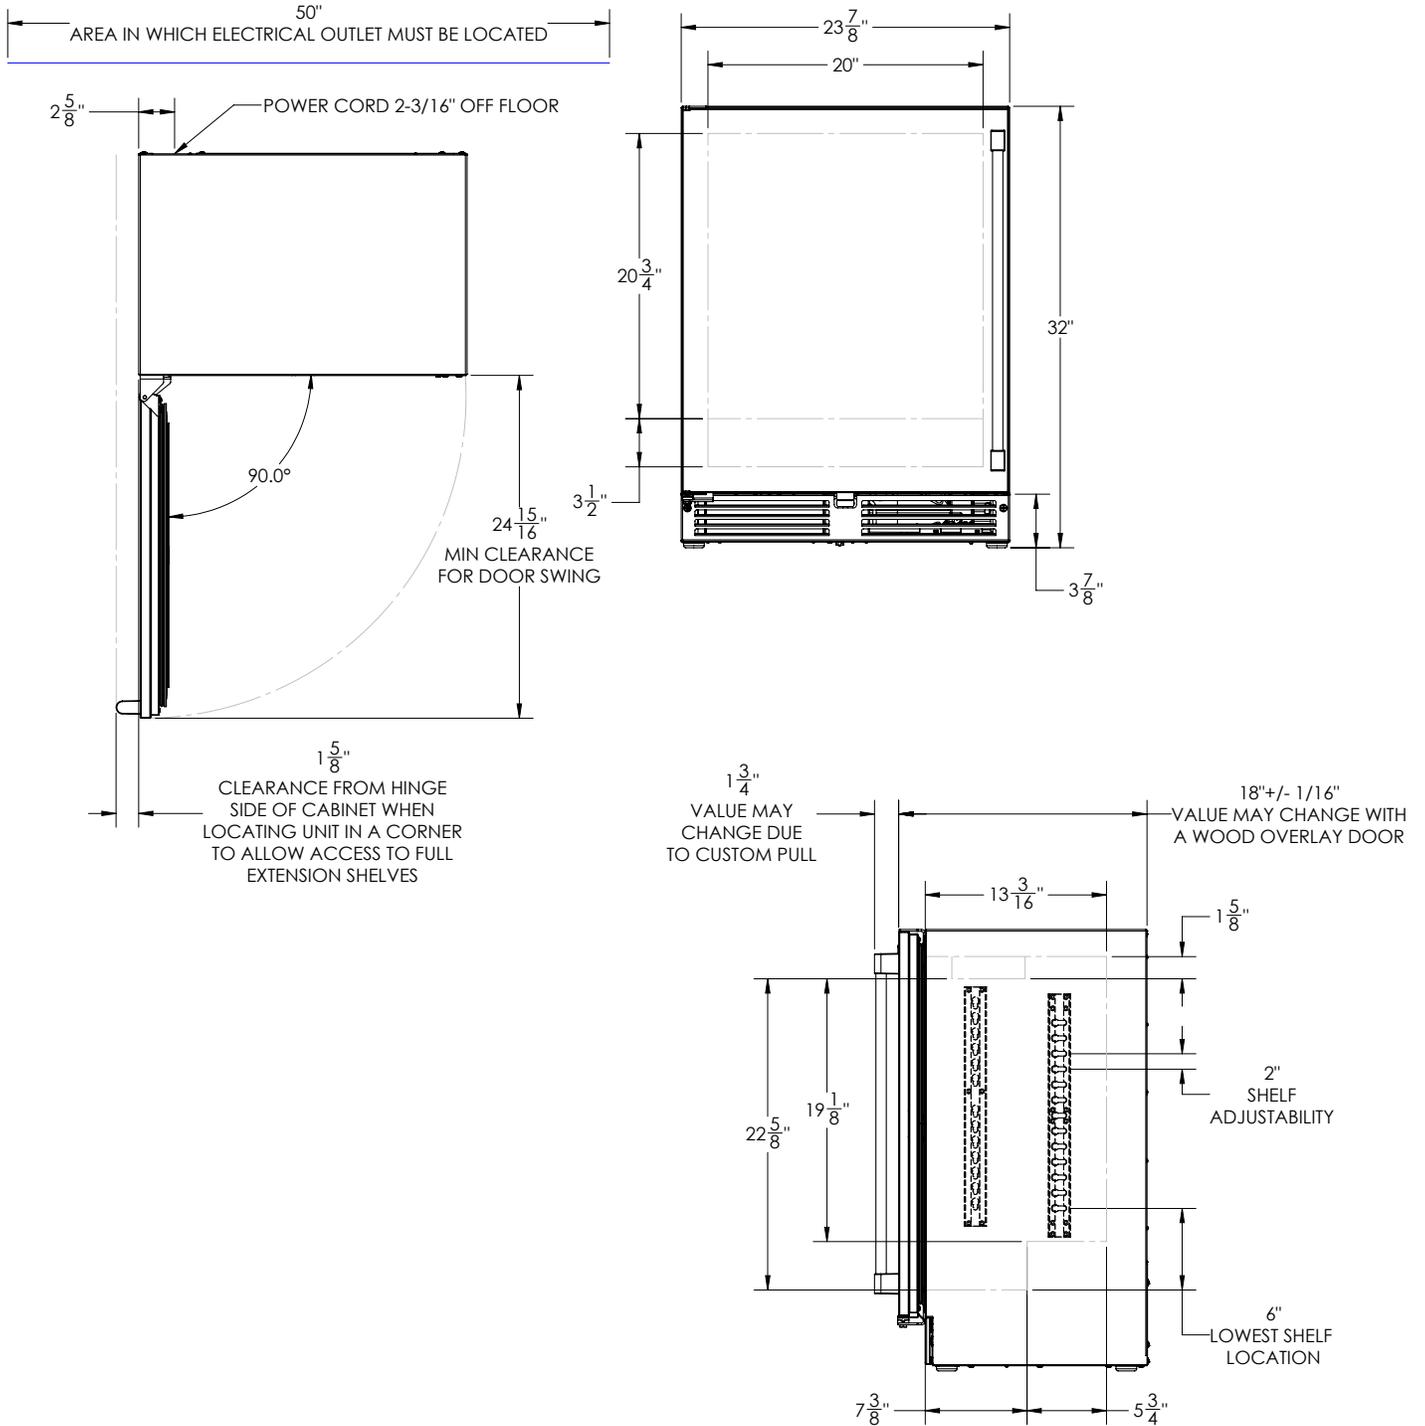

Form No. Z2672  
 Rev 11.02.22