

Puristic Island Ventilation Hood

DA 6690 D



Puristic Island Ventilation Hood

DA 6690 D




FEATURES

- LED ClearView lighting
- Con@ctivity — communication between hood and cooktop
- Touch on Glass controls
- Four fan speeds (incl. intensive)
- Removable, dishwasher-safe stainless steel grease filter
- Filter saturation indicator
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes

SPECIFICATIONS	
DA 6690 D — Item 28669055USA	
Vented or Recirculating	625 CFM setting
Canopy Dimensions	35 ³ / ₈ " (898mm) W x 3 ³ / ₈ " (85mm) H x 23 ⁹ / ₁₆ " (598mm) D
Dimensions (Standard Height) - Vented	27 ³ / ₄ " — 39 ⁹ / ₁₆ " (705—1005mm) H
Dimensions (Standard Height) - Recirculating	30 ¹ / ₈ " — 43 ⁵ / ₁₆ " (765—1075mm) H
Chimney Dimensions	12" (305mm) W x 11 ⁵ / ₈ " (295mm) D
Minimum distance above cooktop	Please refer to page 26 of the installation manual
Color	Available in brushed stainless steel or RAL colors
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Electrical Rating	362 W (Blower: 350 W; Lighting: 4x3 W)
Optional Accessories	
Recirculating Kit	DUW 32 Recirculating Kit
OdorFree Charcoal Filter	DKF 12-1 OdorFree Charcoal Filter
Reducing Collar (air flow max. 400 CFM)	
Shipping	
Shipping Weight	74.8 lbs (34kg)
Support	
Call	800.843.7231
20/20	2020technologies.com

PRODUCT VIEW

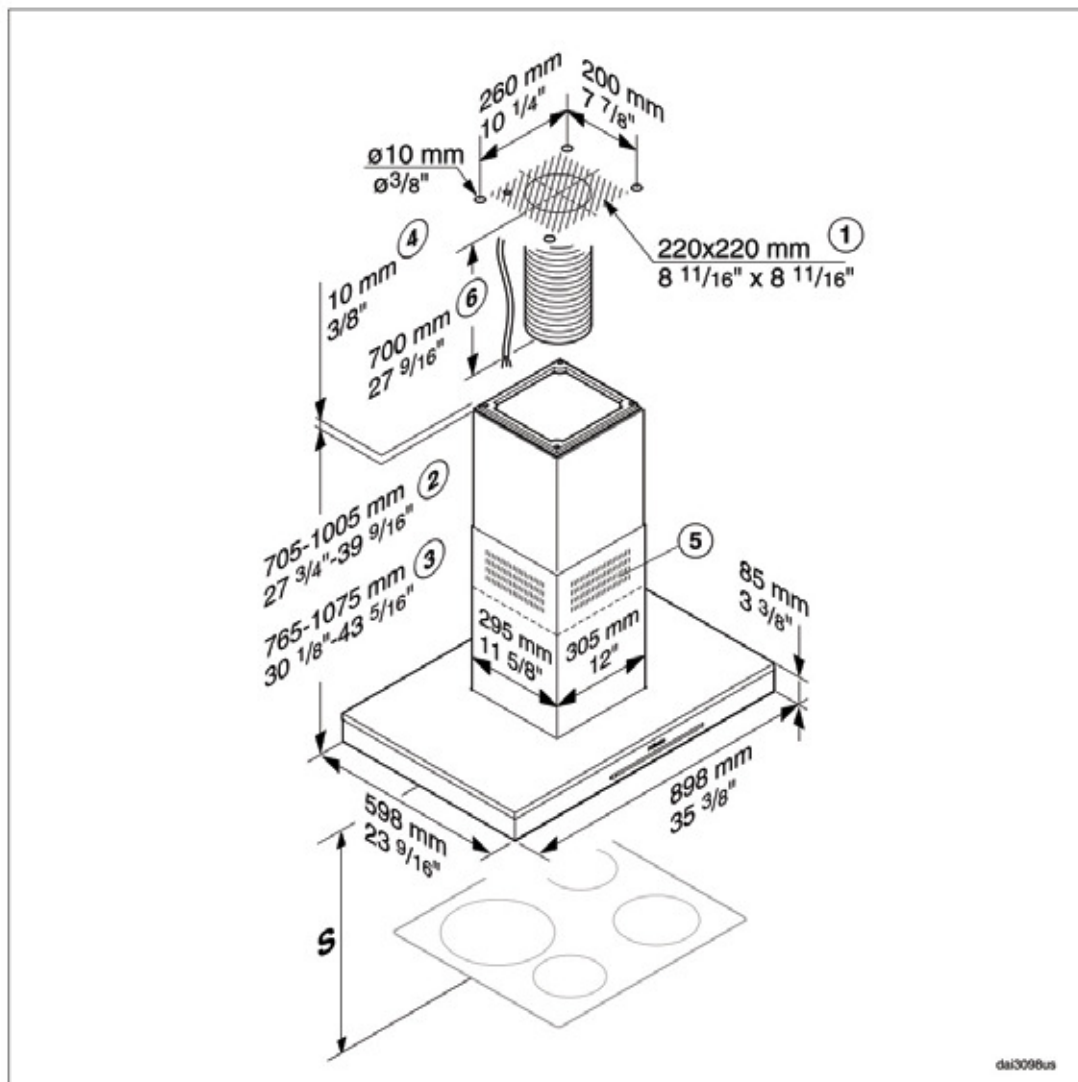

- ① Mounting area for the exhaust ducting and power cable. In recirculation mode, only the power cord is required.
- ② Possible height range for appliance in vented mode
- ③ Possible height range for appliance in recirculation mode
- ④ Alternative installation with spacer frame
- ⑤ Air vent positioned at the top for recirculation
- ⑥ A power cord is required to connect the hood to the socket in the ceiling. With extraction mode flexible ducting is also required.

Exhaust connection Ø 6" (150 mm)