



HIGH POWERED. HIGH DESIGN.

This new **Viking RVL Collection** bridges present and future with a fully integrated design that fits seamlessly into surrounding cabinetry. Although its sleek look is decidedly minimal, it boldly conveys Viking performance at a glance. And rest assured, no commercial cooking power was sacrificed for appearance sake. With streamlined silhouettes, a sleek user interface, transitional sizes, and outfitted in stunning black glass or stainless steel with black glass, this collection gives you limitless contemporary design possibilities that will ignite your culinary passions.

MODEL NUMBERS

MVWDE6301BG – 30"W. Warming Drawer (Black Glass)

MVWDE6301SS – 30"W. Warming Drawer (Stainless Steel/Black Glass)

DESIGN AND INSTALLATION FEATURES

- All black glass or stainless steel with black glass front offer a sleek, modern aesthetic to complement any kitchen style
- Capacitive touch control ensures intuitive operation with a smooth, easy-to-clean interface
- Seamless integration with no bottom venting creates a high-end, built-in look without visible vents disrupting the design
- Minimal product reveals enhance the streamlined, modern aesthetic with reduced visible edges
- Sleek monochromatic chrome handle (Black Glass Model) adds a contemporary, sophisticated touch that complements modern kitchen styles
- Handleless push-to-open drawer (Stainless Steel Model) opens smoothly with a gentle press, offering a clean and minimalistic look
- Smooth glass interior base allows for easy cleanup and prevents spills from being absorbed into the surface
- Full-extension slides provide effortless access to the drawer's contents, ensuring convenience and ease of use
- Can be installed flush or integrated, allowing for flexible design options to match any kitchen layout

COOKING FEATURES

- Heated glass base combined with a rear fan ensures even, variable heating modes for precise temperature control
- Cups Mode gently warms cups for up to 30 minutes, keeping beverages at the perfect temperature
- Plates Mode evenly heats plates for up to 45 minutes, ensuring meals stay warm when served
- Warm Mode maintains a constant low heat for up to 60 minutes, keeping food at an ideal serving temperature
- Rapid Proof Mode creates a warm, draft-free environment for up to 30 minutes, making it perfect for proofing dough
- Dehydrate Mode slowly dries meats, fruits, vegetables, and herbs for up to four hours, preserving their flavors and nutrients



MVWDE6301BG



MVWDE6301SS

- Slow Cook Mode allows meats like roasts to cook for up to six hours at a low, consistent temperature for tender, flavorful results
- Temperature settings ranging from 86°F to 212°F provide versatility for various warming and cooking needs
- Delay Start allows users to program the warming drawer to begin heating at a set time and turn off automatically at the end of the cycle
- Sabbath Mode keeps the drawer operating for up to 72 hours while deactivating automatic shutoff and lighting
- Standby Mode automatically activates after 12 hours of continuous use, improving energy efficiency and safety
- LED interior lighting illuminates the drawer's contents, ensuring clear visibility for added convenience

CAPACITY

- 28 cappuccino cups
- 54 espresso cups
- 30 plates
- Included wire shelf increases loading capacity

WARRANTY

- 2-year full – complete product
- 90-day full – cosmetic parts such as glass, painted items and decorative items
- 5-year limited – electric heating element




NEW RVL BUILT-IN WARMING DRAWER

30"W. MVWDE


| Model | MVWDE6301 |
|-----------------------------|--|
| Overall Width | 29-13/16" (75.72 cm) |
| Overall Height | 9-7/8" (25.16 cm) |
| Overall Depth | Overall – 24-1/8" (61.28 cm) Drawer extension – 19-1/2" (49.5 cm) Depth into cabinetry – 21-5/16" (54.1 cm) |
| Interior Width | 26-13/16" (68.14 cm) |
| Interior Height | 7-3/8" (18.70 cm) |
| Interior Depth | 16-1/8" (41.02 cm) |
| Cutout Width | Standard Mount – 28-1/2" (72.39 cm) |
| Cutout Height | Standard and Flush Mount – 9-3/16" (23.3 cm) |
| Cutout Depth | Standard and Flush Mount – 23-1/4" (59.06 cm) |
| Electrical Requirements | Power Cord Length - 70-7/8" (1800 mm) Power Outlet - 3-prong grounded Power Supply - 110 VAC, 60 Hz Service - 10 amp circuit Max Power Usage (Watts) - 810 Watts Min Power Usage (off) - .5 Watts |
| Approximate Shipping Weight | 75 lb. (34 kg) |

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.


FRONT

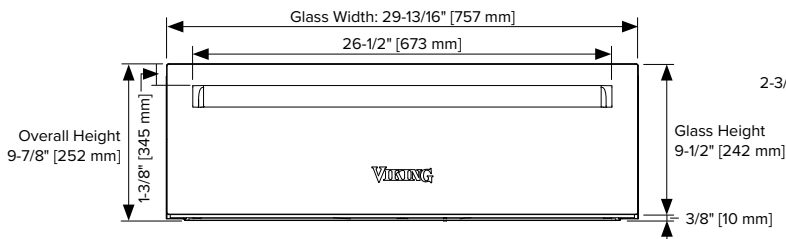

BACK (POWER LOCATION)

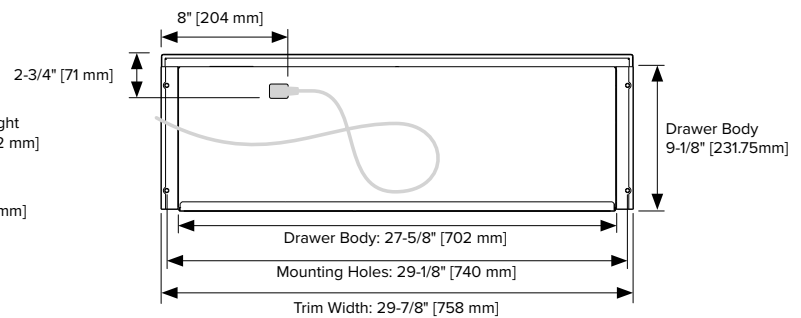

SIDE

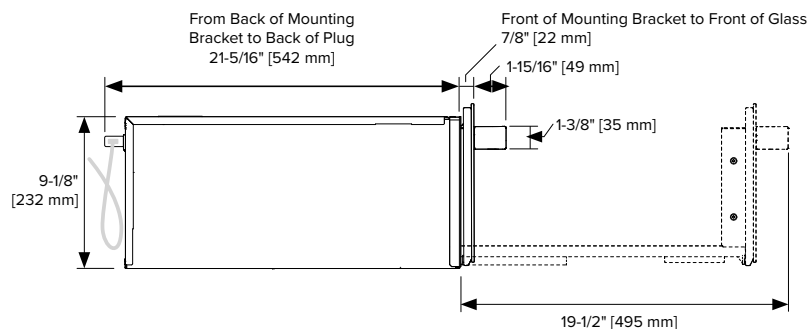

FIND YOUR LOCAL DEALER AT VIKINGRANGE.COM
FOR PRODUCT INFORMATION, CALL 1-888-845-4641 OR VISIT OUR WEBSITE

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MS 38930 USA
© 2020 VIKING RANGE, LLC. ALL RIGHTS RESERVED.