5.8 cu. ft. Gas Slide-in Range

- EasyClean®
- SuperBoil™ 17k BTU Power Burner
- Slide-in Design
- 5.8 cu ft. Capacity

COLOR AVAILABILITY









COLOR AVAILABILIT I		
LSGL5830S – Stainless Steel		
CAPACITY		
Oven Capacity	5.8 cu. ft.	
OVEN FEATURES		
Convection System	No	
Oven Cooking Modes	Warm, Bake, Broil, EasyClean®	
Air Sous Vide	No	
Built-in Air Fry	No	
Temperature Probe	No	
Oven Racks	2 Standard	
Number of Rack Positions	7	
Broil Element (BTU, NG / LP)	1,500W	
Bake Element (BTU, NG / LP)	19,000 / 17,000	
EasyClean®	Yes	
Self Clean	No	
GoCook Smart Oven Light	No	
Door Lock	No	
Automatic Safety Shut-Off	No	
COOKTOP FEATURES		
Cooktop Type	Sealed	
Number of Burners	4	
Burner BTU (NG / LP)		
Left Front	12,000 / 10,000	
Left Rear	9,100 / 7,500	
Right Front	17,000 / 12,000 (SuperBoil™)	
Right Rear	5,000 / 4,000	
Cooktop Burner Grate Material	Cast Iron	
Continuous Grates	Yes	


CONTROLS		
Cooktop Control Type	Front Knobs	
Oven Control Type	Front Knob	
Display	No	
Language	English	
Kitchen Timer	No	
Timed Cook	No	
Clock	No	
Temperature Unit of Measure	°F	
Cooking Complete Reminder Volume	No	
Oven Control Lock	No	
CONVENIENCE		
Storage Drawer	No	
ADA Compliant	Yes	
Sabbath Mode	No	
SMART FEATURES		
Wi-Fi Enabled	No	
ThinQ®Technology	No	
SmartDiagnosis [™]	No	
NFC Tag On	No	
FINISHES AND APPEARANCE		
Fingerprint & Smudge Resistant Exterior	No	
Cooktop Finish	Porcelain Enamel	
Handle / Knobs	Stainless Steel Appearance	
Oven Door Feature	WideView [™] Window	
TECHNICAL SPECS		
Fuel Type	NG / LP	
Required Power Supply	120V, 60Hz	
Minimum Circuit Rating	15 Amp	
Power Cord Type	3-Prong, Attached to Unit	
Power Outlet Location	See Installation Diagram	
Gas Supply Location	See Installation Diagram	


INCLUDED ACCESSORIES		
2 Standard Racks, Rear Filler Kit, LP Conversion Kit, Anti-tip Kit		
OPTIONAL ACCESSORIES		
Slide-in Range Filler Kit (Side Gaps)	LSFL301S	
DIMENSIONS / CLEARANCES / WEIGHTS		
Product Dimensions $(W \times H \times D \text{ w/Handle})$	29 7/8 " x 37 1/4 " x 29 7/₃₂ "	
Product Height to Cooking Surface	36"	
Cutout Dimensions (W x H x D)	30" x 36" x 25"	
Carton Dimensions (W x H x D)	32 ¹ / ₁₆ " × 49 ¹¹ / ₁₆ " × 29 ³ / ₈ "	
Approx. Weight (Carton)	167 lbs.	
LIMITED WARRANTY		
Parts and Labor	1 Year	

DIMENSIONS / CLEARANCES

Provide proper clearance between the range and adjacent combustible surfaces. These dimensions must be met for safe use of your range. The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements. The range may be placed with O"clearance (flush) at the back wall.


GAS PIPE AND ELECTRICAL OUTLET LOCATIONS




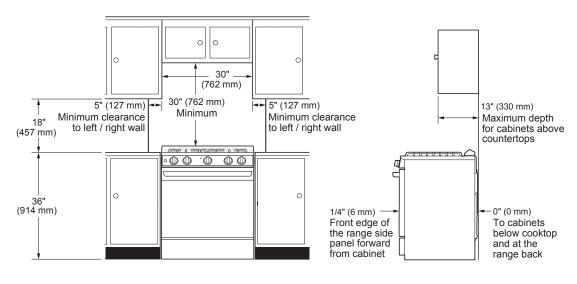

LG BUILDER

DIMENSIONS / CLEARANCES





DIM	DIMENSIONS / CLEARANCES		
Α	Width	29 7 / 8 " (759 mm)	
В	Height	37 1/4" (946 mm)	
С	Depth (Includes Door Handle)	29 7 / 32 " (742 mm)	
D	Height (Excludes Vent Trim)	36" (914 mm)	
Е	Depth (Includes only the product body that is loaded into the cabinet. Excludes door and handles)	24 25 / _{32} " (628.4 mm)	
F	Depth (Excludes Door Handle)	26 27/32" (682 mm)	
G	Depth when door is fully opened	48 5 / 8 " (1235.9 mm)	