Camerton™ | K-12867

25" wall-mount blow-out service sink

Features

- Deep squared basin
- 21-1/2" x 25" (546 - 635 mm)
- Blow-out action flushing rim
- 1-1/2" (38 mm) top spud
- Sink requires 5 - 7 gpf (19 - 27 lpf) valve, and minimum running pressure of 25 psi (172 kPA)
- No faucet holes; requires wall-mount faucet
- Sink drain with strainer sold separately



Sustainability

Available Colors/Finishes

Color tiles intended for reference only.

0 White

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-5-2026 18:0 - US-CA

THE BOLD LOOK OF KOHLER

Codes/Standards

ASME A112.19.2/CSA B45.1

Technical Information

Basin Configuration:	Single Bowl

Material

- Vitreous china

Recommended Products/Accessories

K-8935 Stainless steel rim guard for front rim installation on Camerton™ sink, 11"

K-23726 Drain treatment

K-13864 Loose sink strainer

K-23725 Cast iron cleaner


Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-5-2026 18:0 - US-CA

THE BOLD LOOK OF KOHLER.

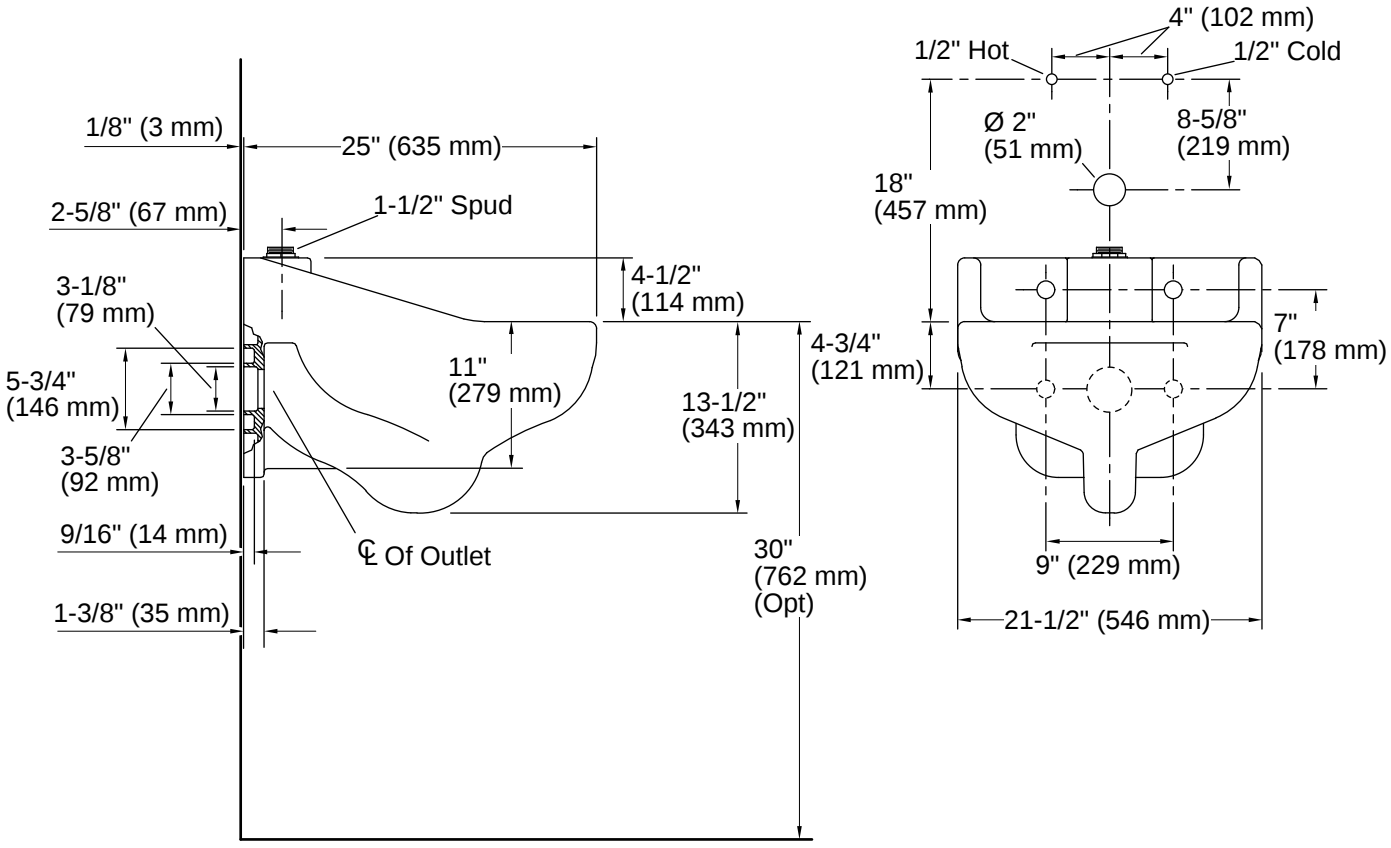

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.

Minimum flowing pressure required: 25 psi (172.4 kPa)
Minimum flow rate required: 25 gpm (94.6 lpm)
Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-5-2026 18:0 - US-CA

THE BOLD LOOK OF KOHLER