

# DLE7010W

## 7.3 cu. ft. Ultra Large High Efficiency Rear Control Dryer™, Electric Dryer

7.3 cu. ft. Capacity

LoDecibel® Quiet Operation

FlowSense® Duct Clogging Indicator

Winkle Care Option



### AVAILABLE COLORS



WHITE



ENERGY STAR

### SUMMARY

Type	Rear Control Top Load Dryer
Vent Type	Vented
Dryer Type	Electric
Capacity	7.3 cu. ft.
Matching Washer	WT7010CW
Sensor Dry	Yes
Steam	No
Available Color	White (W)

### DRYER PROGRAMS

No. of Programs	8
	Normal, Perm Press, Heavy Duty, Bedding, Delicates, Speedy Dry (Manual Dry), Air Dry (Manual Dry), Freshen Up (Manual Dry)

No. of Options	7
	Wrinkle Care, Control Lock, More Time, Less Time, Damp Dry Signal, Energy Saver, Signal

Temperature Setting	High, Medium, Low
Drying Levels	Very Dry, Normal Dry, Damp Dry

Manual Dry Times	60, 40, 20min, More Less
------------------	--------------------------

### APPEARANCE

Control & Display	Electronic Control Panel with LED Display
Dial-A-Cycle®	Yes

### FABRIC CARE FEATURES

Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes

### CONVENIENCE FEATURES

3 Minute Installation Check	Yes
LoDecibel® Quiet Operation	Yes
End of Cycle Signal	Yes
Reversible Door	Yes
FlowSense® Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Control Lock	Yes
Venting Option	4 Way Venting
4 Adjustable Legs	Yes
Remaining Time Display / Status Indicator(s)	Yes

### SMART FEATURES (ThinQ® TECHNOLOGY)

Smart Diagnosis	Yes
WiFi	No
NFC Tag On Technology	No
ThinQ Care (Remote Start/ Cycle Monitor)	No
Energy Monitoring	No

### ENERGY

ENERGY STAR® Certified	Yes
CEF	3.49

### MATERIALS

Aluminized Alloy Steel Drum	Yes
NeveRust® Stainless Steel Drum	No
Drum Rear	Painted
Cabinet	Painted Steel
Door/ Trim	Tempered Glass / Silver
All Available Colors	White (W)

### POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	240V, 26Amps
Type	Electric
Plug	Not Included
Plug Type	4-Wire or 3-Wire (Homes built after 1996 require 4-Wire)

### OPTIONS

Side Venting Kit	383EEL9001B
------------------	-------------

### DIMENSIONS

Product (WxHxD)	27" x 44 1/2" x 29 1/2" (50 1/4" D with door open)
Carton (WxHxD)	29" x 46 1/2" x 31 3/8"
Weight (Product)	117.1 lbs.
Weight (Carton)	123.7 lbs.


### LIMITED WARRANTY

Parts & Labor	1 Year
Drum	3 Years

### UPC CODES

DLE7010W	048231350204
----------	--------------

## DIMENSION / CLEARANCES

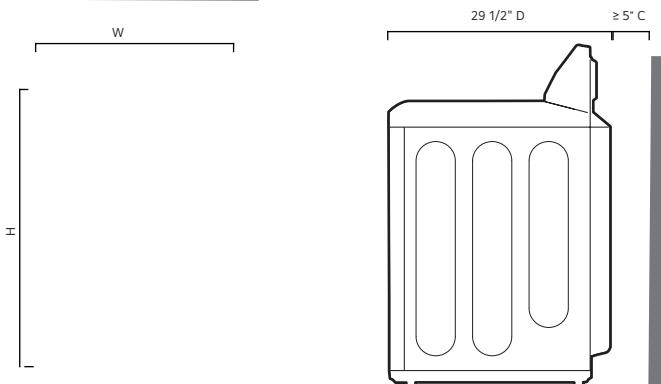

## DIMENSIONS

Product (WxHxD)	27" x 44 1/2" x 29 1/2" (50 1/4" D with door open)
Carton (WxHxD)	29" x 46 1/2" x 31 3/8"
Weight (Product)	117.1 lbs.
Weight (Carton)	123.7 lbs.

## DIMENSION / CLEARANCES


## CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm<sup>2</sup>) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm<sup>2</sup>) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

## DIMENSION / CLEARANCES

## INSTALLATION SPACING FOR CABINET

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

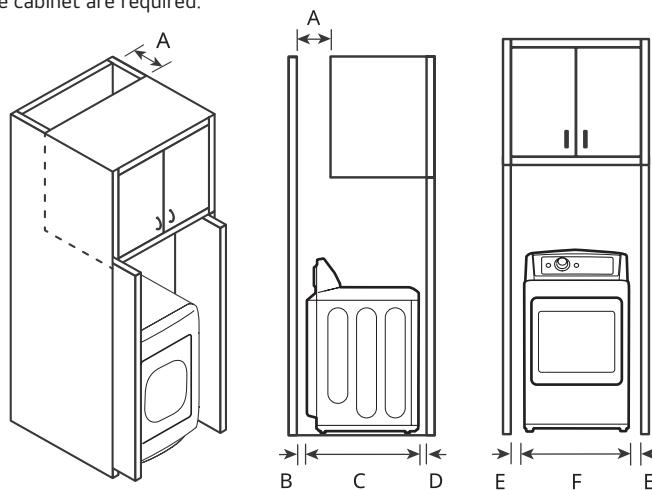

## DIMENSIONS


A Depth of Ventilation Opening	≥ 7" (178mm)
B Back Clearance	≥ 5" (127mm)
C Depth	29 1/2" (750mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (686 mm)

## DIMENSION / CLEARANCES

## Installation Spacing for Recessed Area or Closet Installation

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

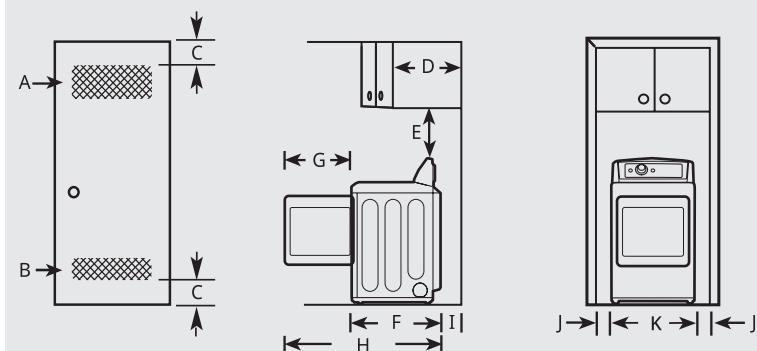

## DIMENSIONS

A Upper Ventilation Opening	≥ 48 sq. in. (310 cm <sup>2</sup> )
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm <sup>2</sup> )
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Depth	29 1/2" (750 mm)
G Length of Door Swing	21 1/4" (540 mm)
H Maximum Depth With Door Open	50 1/4" (1275 mm)
I Back Clearance	≥ 5" (127 mm)
J Side Clearance	≥ 1" (25 mm)
K Width	27" (686 mm)

## LEVELING THE APPLIANCE

## CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

1 Level

2 Level Feet

