

LREN6321YE

6.3 cu. ft. Electric Single Smart Range with Air Fry, ProBake Convection®, EasyClean® and Premium Handle

- 6.3 cu. ft Capacity
- ProBake Convection® with Air Fry
- EasyClean®
- WideView™ Window
- LG ThinQ® with ThinQ Care
- Storage Drawer

KEY FEATURES

AVAILABLE COLORS

STAINLESS STEEL



SMART APPLIANCE

ThinQ Care

Proactive Smart Alerts to Keep Your Appliances Running Smoothly


- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

PRODUCT FEATURES

SUMMARY		DRAWER FEATURES		ACCESSORIES	
Type	Electric Single Oven	Type	Storage	Standard Rack	Yes (2)
Total Oven Capacity (cu. ft.)	6.3	Time Control	No	Air Fry Basket	No
Available Colors	Stainless Steel,	CONTROL FEATURES		POWER/ RATINGS	
COOKTOP		Cooktop Control Type	Knobs Control	Amp Rating at 208V	47.1 A
Type	Radiant	Oven Control Type	Keypad	Amp Rating at 240V	54.3 A
No of Radiant Elements	4	Display	White LED	KW Rating at 208V	9.8kW
Element Size/ Wattage - Left Rear	1200W (6")	Language	English	KW Rating at 240V	13W
Element Size/ Wattage - Right Rear	1200W (6")	Clock	12hr or 24hr (Option)	Required Power Supply (amp)	40A
Element Size/ Wattage - Left Front	3200W (9") / 1400W (6") (UltraHeat™)	Kitchen Timer	Yes	DIMENSIONS/ CLEARANCES/ WEIGHT	
Element Size/ Wattage - Right Front	3200W (9") / 1400W (6") (UltraHeat™)	Timed Cook	Yes	Shipping Weight	193.3 lbs
Center (Warming Zone)	-	Temperature Unit of Measure	Fahrenheit / Celsius	Product Weight	160.9 lbs
Hot Surface LED Indicator	Yes	Cooking Complete Reminder Volume	Beeper (Hi, Lo, Off)	Cabinet Width	30"
OVEN FEATURES		Certified Sabbath Mode	Yes	Overall Depth - without handle	26 3/4"
Broil Element (Watt)	Sheath (4200W/ 6 Pass)	ThinQ® SMART FEATURES		Overall Depth - with handle	29 1/8"
Convection (Watt)	2500W	ThinQ® (Wi-Fi Enabled)	Yes	Overall Height	46 1/2"
Convection Fan	Dual Speed (High/Low)	ThinQ Up	Yes	Overall Width	29 7/8"
Convection Type	ProBake® Convection	Check & Control	Yes	Oven Interior Dimensions (W x H x D)	24 7/8" x 22" x 20"
Oven Mode	Bake, Broil, Air Fry, EasyClean®, Convection Bake, Convection Roast, Warm	Voice Control	Google Assistant & Amazon Alexa	Height to Cooking Surface	36"
Oven Control Features	Keypad	Proactive Customer Care	Yes	Drawer Dimensions (W x H x D)	22 3/8" x 4" x 14 11/16"
Convection Conversion	Yes	SmartDiagnosis™	Yes	Carton Dimensions (W x H x D)	32 1/2" x 51" x 30 1/2"
EasyClean®	Yes	APPEARANCE		LIMITED WARRANTY	
EasyClean® Time	10 mins	All Available Color	Stainless Steel	Parts & Labor	1 Year
GoCook Smart Oven Light	1 Light	Knobs	NI-CR Plated (Weight)	UPC CODE	
No. of Rack Positions	-	Knobs Material	Aluminum/ PC+ABS	LREN6321YE	048231350440
Door Lock	No	Handle	Al Anodizing		
Automatic Safety Shut Down	After 12 Hours	Handle Material	Stainless Steel		
InstaView	No	Handle Type	Bar Type		
		PrintProof™ Finish	No		
		Oven Door Feature	WideView™ Window (Smog Glass)		
		Cooktop Finish	Stainless Steel		


LREN6321YE

DIMENSION / CLEARANCES

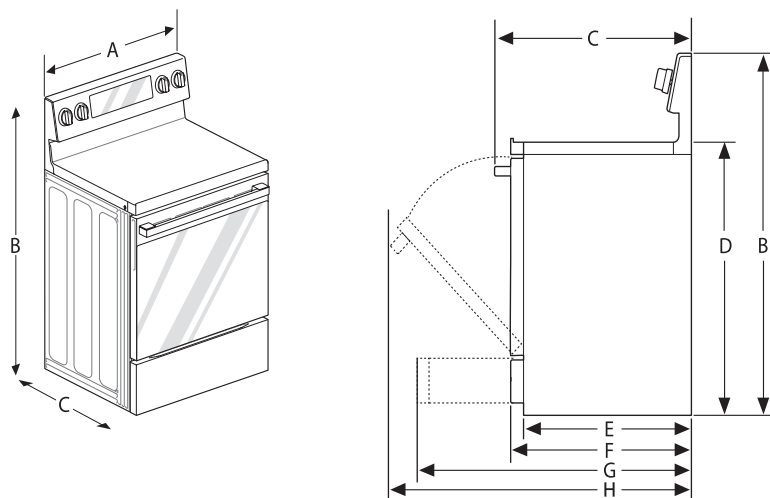

DIMENSIONS

A	Width	29 7/8" (759 mm)
B	Height	46 1/2" (1,181 mm)
C	Depth (Includes Door Handle)	29 1/8" (740mm)
D	Height (Excludes Controller)	36" (914 mm)
E	Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 5/8" (627 mm)
F	Depth (Excludes Door Handle)	26 3/4" (680 mm)
G	Depth when drawer is fully opened	36 13/16" (935mm)
H	Depth when door is fully opened	49 13/16" (1,265 mm)

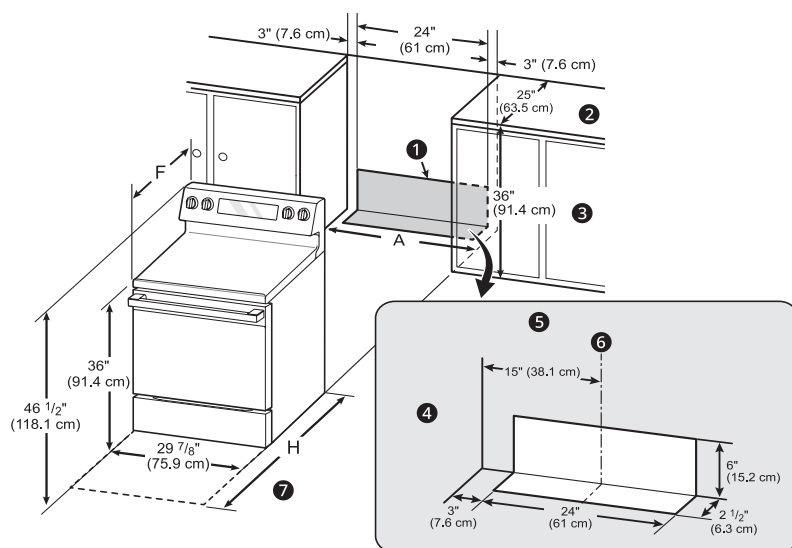

MINIMUM DIMENSIONS

1	Minimum distance from top of range to combustible surface overhead	30" (76.2 cm)
2	Minimum clearance to left/right wall	5" (12.7 cm)
3	Maximum depth for cabinets above countertops	13" (33.0 cm)
4	Front edge of the range side panel forward from cabinet	2 1/4" (6.3 cm)
5	To cabinets below cooktop and at the range back	0"
6	Minimum opening in overhead cabinets	30" (76.2 cm)
7	Minimum distance from countertop to overhead cabinets at side	15" (38.1 cm)
8	Height of countertop	36" (91.4 cm)

NOTE

- 1 30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than no. 28MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.
- 7 15" (38.1 cm) minimum between countertop and adjacent cabinet bottom.
- Important - Save for the use of the local electrical inspector.
- For installation in Canada, a free-standing range is not to be installed closer than 15/32" (12 mm) from any adjacent surface.

