

MRB 3610

Monolith Refrigerator
Fully Integrated, panel ready

LIEBHERR

Refrigeration and Freezing



home.liebherr.com



MRB 3610

Energy consumption (kWh / y)	260
Estimated Yearly Energy Cost in US \$ ¹	36
Sound rating dB(A) ²	39
Refrigerator capacity cu.ft. (l)	18.9 (535)
BioFresh/BioFresh-Plus comp. cu.ft. (l)	8.3 (236)
Number of shelves	4
Number of door racks	3
Number of BioFresh/BioFresh-Plus drawers	2 / 1 with LED lighting
Electronic control	InfinitySwipe
Refrigerator temperature range °F (°C) ³	+36°F to +45°F (+2°C to +7°C)
Defrost type	Automatic
Interior light	InfinityLight
Internal Water Dispenser	InfinitySpring
Water filter	Yes
Door hinges ⁴	Right, reversible
Product dimensions	
in inch (H / W / D)	83 3/4" / 35 13/16" / 24"
in cm (H / W / D)	212.6/90.9/61
Cut out dimensions	
in inch (H / W / D)	84" / 36" / 25"
in cm (H / W / D)	213.4 / 91.4 / 63.5
Net weight lbs. (kg)	438.7 (199.0)
Voltage V / Hz	115/60

¹Estimated energy cost will depend on utility rates and use.
Estimated energy cost based on a national average electricity cost of 14 cents per KWh.
²Noise output – according to EN 60704-3.
³BioFresh bins temperatures 32°F (0°C), BioFresh-Plus bin 28°F (-2°C) or 32°F (0°C).
⁴Please contact your Liebherr Authorized Dealer for door reversal

Subject to modification. For up-to-date information, visit home.liebherr.com
Specifications are for planning purposes only. For more detailed information, refer to installation instructions or Design Guide.
July, 2026

Accessories

Stainless-steel door panel 36"	9901 458
Monolith brushed aluminum square handle	9901 461
Monolith stainless steel round handle	9904 680
Monolith brushed aluminum soft-edge handle	9901 492
Stainless-steel Toe Kick 36"	9902 349
FreshAir Activated Charcoal Filter	9882 471
Anti-tip bracket wall mounted	9903 042
Water filter	9883 750

Accessories for Side-by-Side installation


Side-by-Side kit (includes wall heater)	9901 428
Other stainless-steel Toe Kicks for Side-by-Side installation, please visit home.liebherr.com/monolith or refer to the accessory section on the Design Guide for more information.	

Features

Bio Fresh Plus	Creates independent climates within your refrigerator and foods retain their vitamins, aromas and appetizing appearance for significantly longer than in conventional refrigerator
Infinity Swipe	Intuitive electronic touch-control panel features a full-color 3.5-inch touch & swipe screen that allows you to control every function.
Infinity Light	Casts beautiful and even side lighting that can tuned according to personal taste, including a soft brightening effect upon opening the doors.
Infinity Spring	Seamlessly integrated flush-mounted internal water dispenser that's there when you need it, and virtually invisible when you don't.
Power Cooling	Allows cool moist air flow into the BioFresh chambers and cold air to circulate behind the door, so items stored in the door remain as cold as everything else in the refrigerator.

Diagrams

Product Dimensions

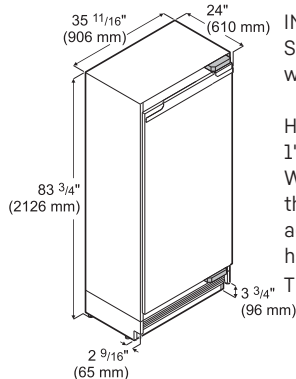


IMPORTANT!

Stated minimum height dimensions include when the leveled feet are fully inserted.

Height can be increased by a maximum of 1" (26 mm) by turning the adjustable feet. When the appliance is fitted in the recess, the appliance must be raised by turning the adjustable feet so that the appliance top has contact with the anti-tipping bracket.

This results in a 4" (102 mm) Toe Kick height.



Inset

A = 15 3/4" (400 mm)
B = 1/2" (12.5 mm)
C = 37 7/8" (962 mm)


Frameless

A = 16" (406 mm)
B = 1/2" (12.5 mm)
C = 38 3/8" (975 mm)


Dimension A = without mounted door handle

Cutout Dimensions

Continuous Toe Kick

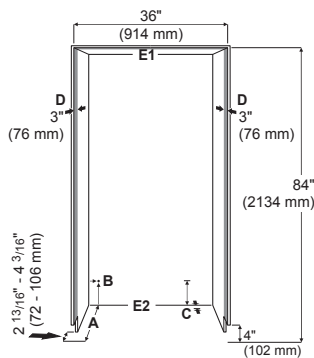

Individual Toe Kick

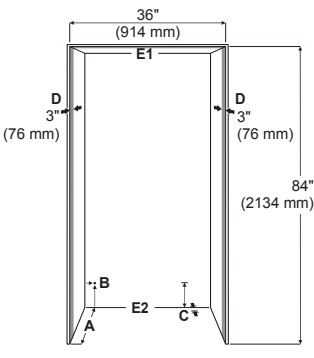

A

Cabinet depth frameless installation style = 25" (635 mm)
Cabinet depth inset installation style = 25" (635 mm) + panel thickness

B

This is the point where the power cord exits from the appliance rear. 3/4" (19 mm) from the left and 5" (127 mm) from the floor. Free length of the power cord is 98" (2.5 m). We recommend the power outlet to be placed outside of the appliance opening. A 15 or 20 A, 110-120 VAC circuit grounded and protected by a circuit breaker or fuse is required.

C

The appliance has a recess in this area for cable and waterline laying. 1" (25 mm) in depth and 5 1/2" (140 mm) in height over the whole width of the appliance. The water pressure must be in the range of 40 - 90 psi. A shut-off valve must be installed between the water line and the main water supply. It must be easily accessible so the water supply can be stopped immediately if necessary.


D

This surface is visible when the appliance door is open. Designed finish is required.

E1, E2

Depending on the appliance, the anti-tipping bracket is positioned at the top (E1) or base (E2) of the appliance and must be secured to the wall or to the floor, please refer to the installation manual for more information.

Door Panel Dimensions and dimensions of free length for power

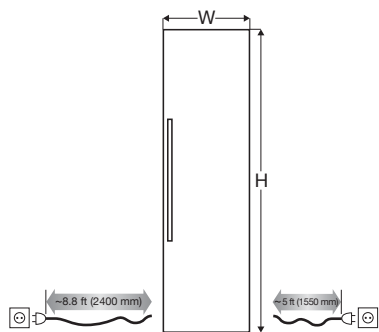

36" recess


Inset installation style

H = 79 7/8" (2029 mm)
W = 35 3/4" (908 mm)

Frameless installation style

H = 80" (2032 mm) Add overlapping dimension to the panel on the top.
W = 36" (914 mm) Add overlapping dimension to the panel on both sides.

Panel thickness: Min. 5/8" (16 mm)* / Max. 1" (25.4 mm)
Panel and handle weight: Max. 88 lbs. (40 kg)
Ventilation takes place through the toe kick area. Door panels must be a minimum of 4" (102mm) above the floor.



* If a shaker style panel is used, which is thinner than the minimum panel thickness, shorter screws than those supplied in the accessory pack must be used.