PT9050SF 9-1/2" MAX. GE Profile[™] Series 30 in. Built-In Single Convection Wall Oven Cutout depth 23-1/2" MIN Dimensions and Installation Information (in inches) Junction box location Most 30" Wall Cabinets can be used with this Cutout width unit. 22" to 28-1/2" MIN. Note: These ovens are not approved for bottom of 28-5/8" MAX. iunction box Conduit stackable installations. Cabinets installed E 40' adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating. А Door handle protrudes 3" from door face. Cutout height Cabinets and drawers on adjacent 45° and 90° $B \rightarrow$ 27-1/4" MIN. 27-5/16" MAX. walls should be placed to avoid interference С with the handle. 22" Electric wall ovens are not approved for 23" minimum installation with a plug and receptacle. They Recommended door opening must be hard wired in accordance with cutout location allowance from floor installation instructions. 32-1/2" Installation Information: Before installing, consult installation instructions packed with product for current dimensional data. 30" Side-by-side installations rerquire at least 2" PT9050 between cutouts. Cabinet 30" 2 x 4 or equivalent runners A – Overlap of oven at top of cutout 1-1/4" **KW Rating** level with bottom of cutout B – Overlap of oven over side of edges of cutout 3/4" and flush with sides of cutout 4.5 240V or solid bottom floor. C – Overlap of oven at bottom of cutout 1-1/4" 208V 3.4 Oven **Breaker Size** 27-3/16" D – Overall depth with handle Suitable 240V 20 Amps 28-3/8" E – Overall height with trim bracing to support (must support 200 lbs.) 208V 20 Amps F - Overall width 29-3/4"



imagination at work

For answers to your Monogram[®] or GE appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.

*ADA qualified based

runners

on Uniform Federal Accessibility Standards





Specification Revised 4/13 220253

PT9050SF GE Profile[™] Series 30 in. Built-In Single Convection Wall Oven

Optional Undercounter Dimensions and Installation Information


Note: 36" ribbon cooktop are approved for use over GE 30" single wall ovens and warming drawers. 30" ribbon cooktops are approved for use over 30" and GE 27" single wall ovens and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Installation information: Before installing, consult installation instructions packed with products for current dimensional data and for alternate installation options.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions. Dimension and installation information are shown in inches.

Gas or electric cooktops may be installed over this oven. See cooktop installation instructions for cutout size. See label on top of oven for approved cooktop models.

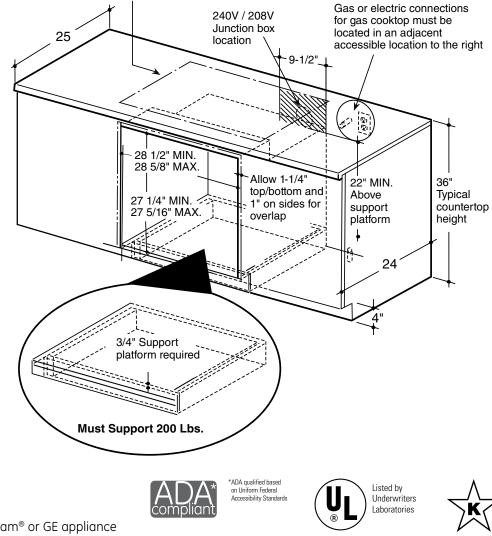



imagination at work

For answers to your Monogram[®] or GE appliance questions, visit our website at geappliances.com or call GE Answer Center[®] service, 800.626.2000.

Specification Revised 4/13 220253

PT9050SF GE Profile™ Series 30 in. Built-In Single Convection Wall Oven

Features and Benefits

- True European Convection with Direct Air Bakes evenly as warm air blows from the top in and around bakeware
- Connected Wirelessly control oven functions from your smartphone
- Notification Lighting Know the status of your oven functions with a quick glance
- Ten-Pass Bake Element Even baking is assured with heat that covers more surface area
- Ten-Pass Dual Broil Element Large and small dishes brown evenly with two, full-coverage elements
- Self-Clean Heavy-Duty Roller Rack Easily access items with a rack that glides smoothly
- Progressive Halogen Oven Lighting See what you're baking with lights that slowly illuminate the oven
- Self-Clean with Steam Clean Option Clean your oven the way you want
- Glass Touch Controls Set temperatures quickly and clean with little effort
- 5.0 cu. ft. Oven Capacity Cook more dishes at once
- Model PT9050SFSS Stainless steel



