





## Jennair® Cuisinière bicomcombustible de style professionnel RISE™, 30 po

JDRP430HL

### Finis/couleurs disponibles

 JDRP430HM  
Floating Glass Black

 JDRP430HL  
Acier Inoxydable

Deux flammes précises produites par des brûleurs en laiton percés avec précision. À l'intérieur de la cavité du four, une chaleur constante circule autour de chaque tige plate. Qu'il s'agisse de saisir une coupe de viande de premier choix, de mijoter des sauces ou de réaliser de succulents rôtis, ces cuisinières offrent une puissance incomparable.

### Caractéristiques clés

Accès à distance


Boutons à effet de halo


Grilles en fonte


Dimensions		Détails	
Profondeur	29.81	Type d'élément de convection	Ventilateur double
Hauteur	36.0	Fonctions de convection	Cuisson; Grillage; Rôtissage
Largeur	29.88	Élément de cuisson caché	Oui
Détails		Nombre de lumières du four	3
Type de nettoyage du four	Autonettoyant	Nombre de grilles de four	3
Arrêt automatique	Non	Nombre de guides de grille	5
Puissance de l'élément de four	3000W	Couleur du bouton de commande du four	Stainless Steel
Puissance de l'élément de grillage	1 667W	Type de bouton de commande du four	métal
Emplacement du grilloir	Dessus du four		
Puissance de l'élément de convection (watts)	2,800		

### Guides et documentation:

 [Guide des dimensions](#)

 [Instructions d'installation](#)

 [Guides d'installation](#)


 [Renseignements sur la garantie](#)

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Overall Width (A)	29-7/8" (75.9 cm)	35-7/8" (91.1 cm)
Bull nose Height (B)	2-1/8" (5.4 cm)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)	7-1/2" (19.1 cm)
Door Height (D)	20-11/16" (52.6 cm)	20-11/16" (52.6 cm)
Door Bottom to Handle Top: RISE™ (E)	20" (50.8 cm)	20" (50.8 cm)
Door Bottom to Handle Top: NOIR™ (E)	20-5/8" (52.4 cm)	20-5/8" (52.4 cm)
Toe-Kick Height (F)	6-11/16" (17 cm)	6-11/16" (17 cm)

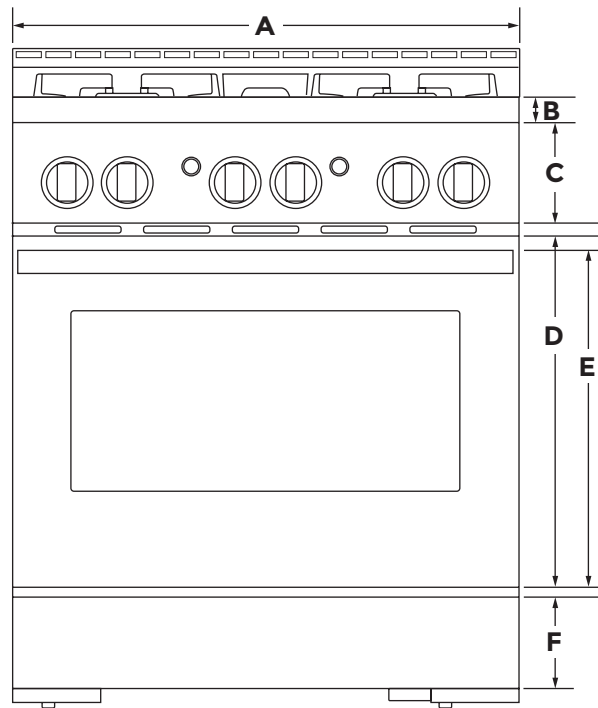

FRONT VIEW




**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Depth with Control Panel Overhang (G)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth with Handle: RISE™ (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with Handle: NOIR™ (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Door Fully Open (I)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)

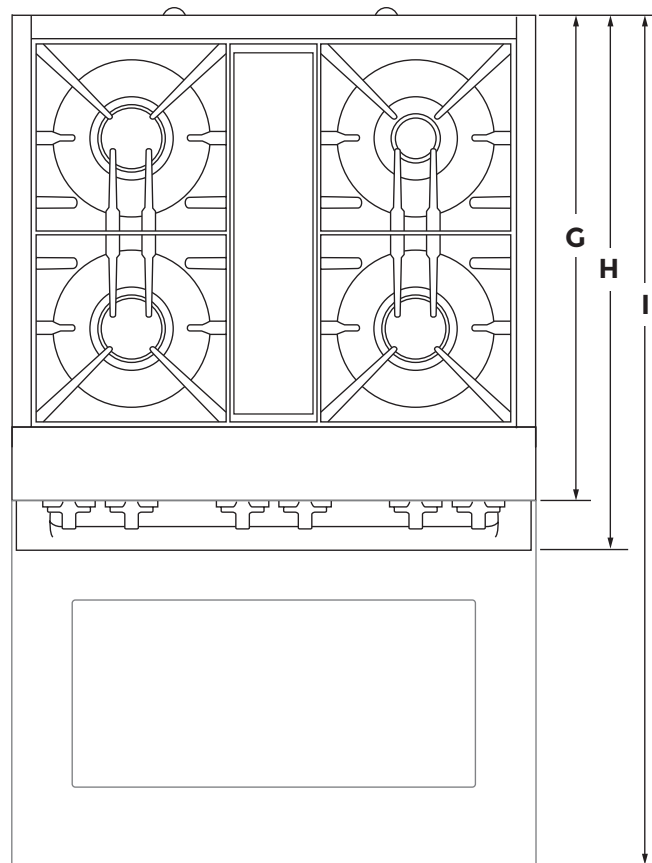


TOP VIEW

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Grates Top Height (A)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)
Cooking Surface Top Height (B)	36" (91.4 cm)	36" (91.4 cm)	36" (91.4 cm)
Door Top Height (C)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)
Handle Top Height: RISE™ (D)	27" (68.6 cm)	27" (68.6 cm)	27" (68.6 cm)
Handle Top Height: NOIR™ (D)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)
Toe-Kick Height (E)	6-11/16" (17 cm)	6-11/16" (17 cm)	6-11/16" (17 cm)
	<b>OPTIONAL ACCESSORIES</b>		
Height to Top of 9" Stainless Steel Backsplash (F)	45" (114.3) min.	45" (114.3) min.	45" (114.3) min.

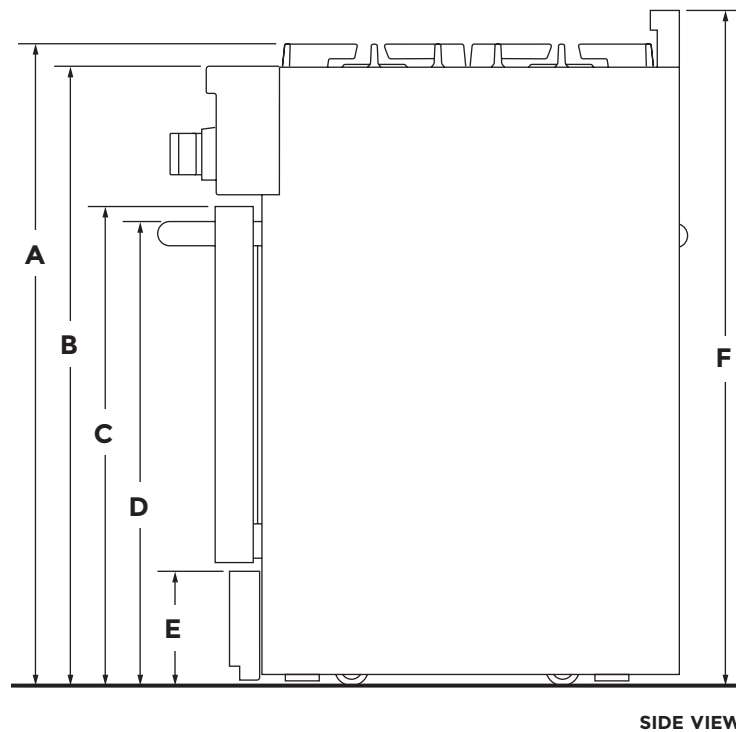


**IMPORTANT:** Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Depth with Door Fully Open (G)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)
Depth with RISE™ Handle (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with NOIR™ Handle (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth to Toe-Kick with Door (J)	26-3/8" (67 cm)	26-3/8" (67 cm)	26-3/8" (67 cm)
Depth with RISE™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)
Depth with NOIR™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)

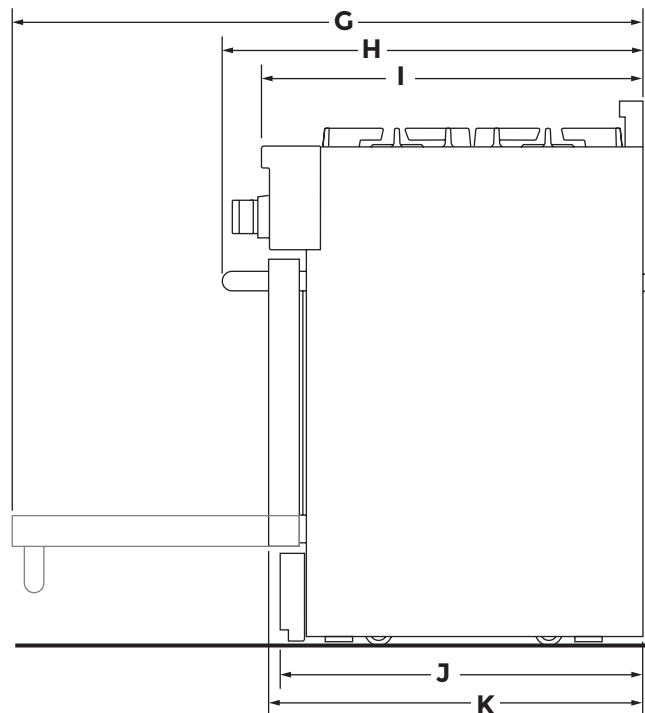


SIDE VIEW

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### PRODUCT

	48" DUAL-FUEL RANGE
Overall Width (A)	47-7/8" (121.6 cm)
Bull nose Height (B)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)
Door Heights ( D)	20-11/16" (52.5 cm)
Door Bo ttoms to Handle Tops: RISE™ (E)	20" (50.8 cm)
Door Bo ttoms to Handle Tops: NOIR™ (E)	20-5/8" (52.4 cm)
Secondary Oven Door Width (F)	17-3/4" (45.1 cm)
Main Oven Door Width (G)	29-5/8" (75.2 cm)
Toe-Kick Height (H)	6-11/16" (17 cm)

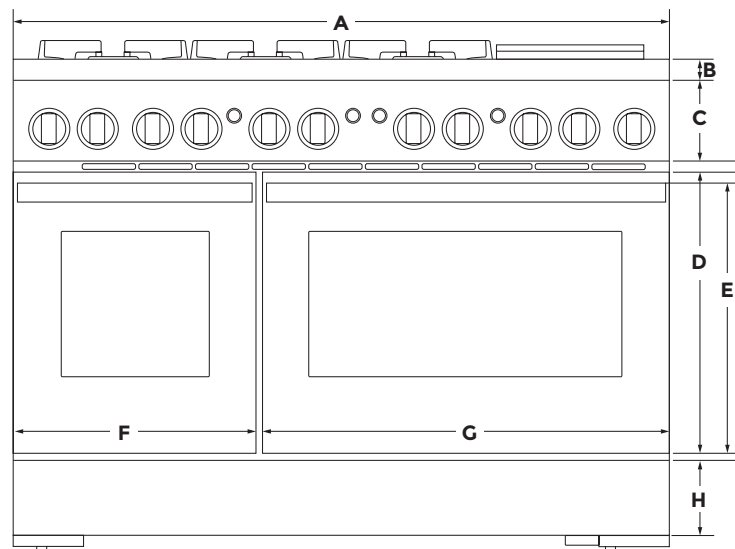


FRONT VIEW

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

PRODUCT

	48" DUAL-FUEL RANGE
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)
Depth with Handles: RISE™ (J)	29-13/16" (75.7 cm)
Depth with Handles: NOIR™ (J)	29-5/16" (74.5 cm)
Depth with Doors Fully Open (K)	46-1/2" (118.1 cm)

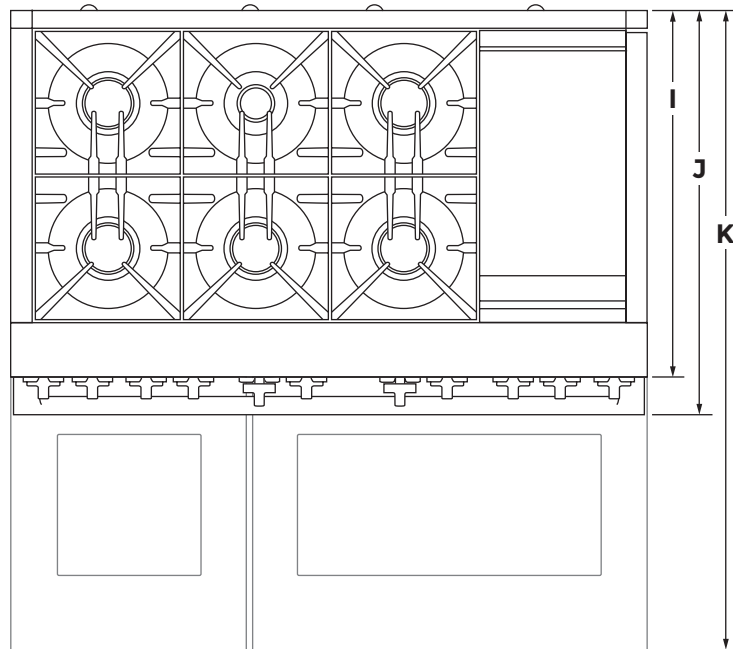

TOP VIEW


# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### OPENING AND CLEARANCE

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Combustible Area Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (38.1 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.
Opening Width (E)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.

\*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

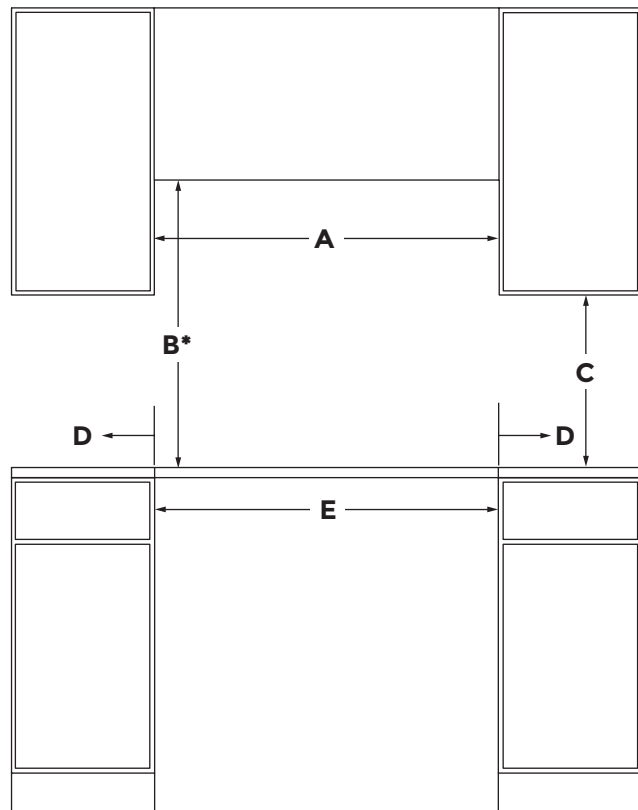

FRONT VIEW


# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES

### OPENING AND CLEARANCE

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Upper Cabinet Depth (F)	13" (33 cm) max.	13" (33 cm) max.	13" (33 cm) max.
Depth to Wall (G)*	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.

\*If the back wall is constructed of a combustible material and a backsplash is not installed, a 1-1/2" (3.8 cm) minimum clearance is required.

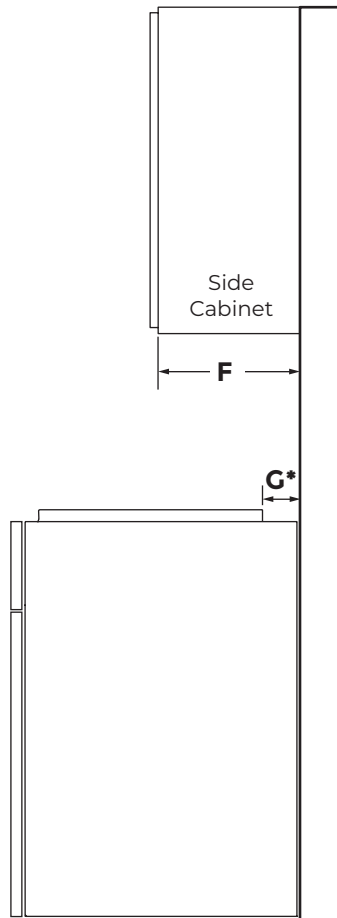

SIDE VIEW

# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES


### ELECTRICAL REQUIREMENTS

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Electrical Zone Width (A)	22" (55.9 cm)	28" (71.1 cm)	40" (101.6 cm)
Electrical Zone Height (B)	15" (38.1 cm)	15" (38.1 cm)	15" (38.1 cm)
Electrical Zone Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)


**ELECTRIC REQUIREMENTS CHECKLIST**

- A 240 volt, 60 Hz, fused, grounded circuit is required.
- For 30" and 36" ranges, use a 40-amp circuit.
- For 48" ranges, use a 50-amp circuit.
- A dedicated circuit is recommended.

### RECOMMENDED ELECTRICAL ZONE

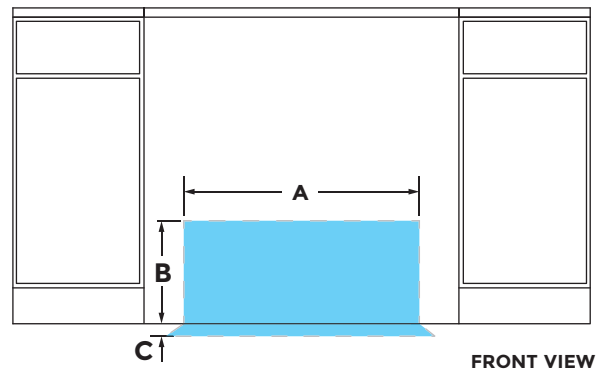

### WIDTH TO ELECTRICAL CONDUIT

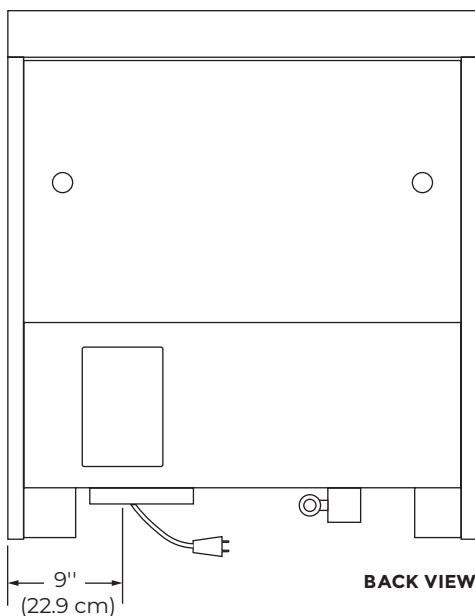

**?** IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.


# DIMENSIONS

## JENNAIR® DUAL-FUEL RANGES


### GAS REQUIREMENTS

	30" CONNECTED DUAL-FUEL RANGE	36" CONNECTED DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Gas Opening Width (A)	6" (15.2 cm)	14" (35.6 cm)	24" (61 cm)
Gas Opening Height (B)	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)
Gas Opening Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)
Distance from Side Cabinet to Gas Opening (D)	6" (15.2 cm)	6" (15.2 cm)	6" (15.2 cm)
Width to Gas Inlet (E)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)

#### RECOMMENDED GAS ZONE

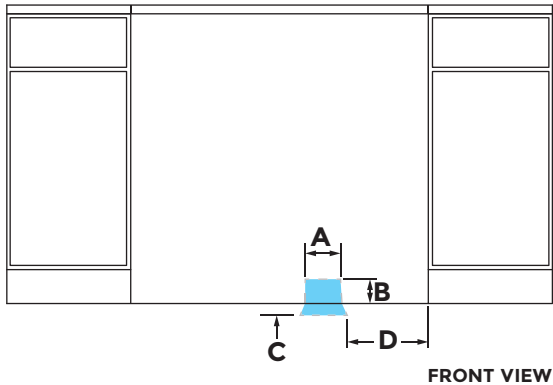

#### WIDTH TO GAS INLET

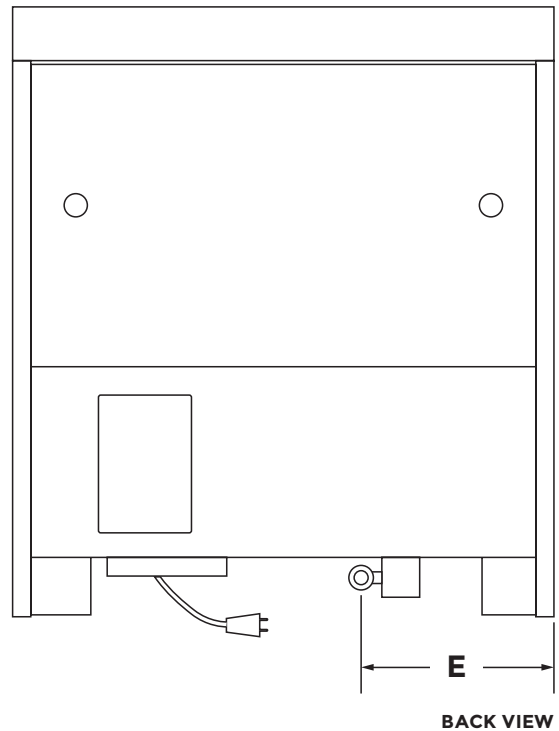

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.