


CWC10



RECOMMENDED AMP RMS POWER

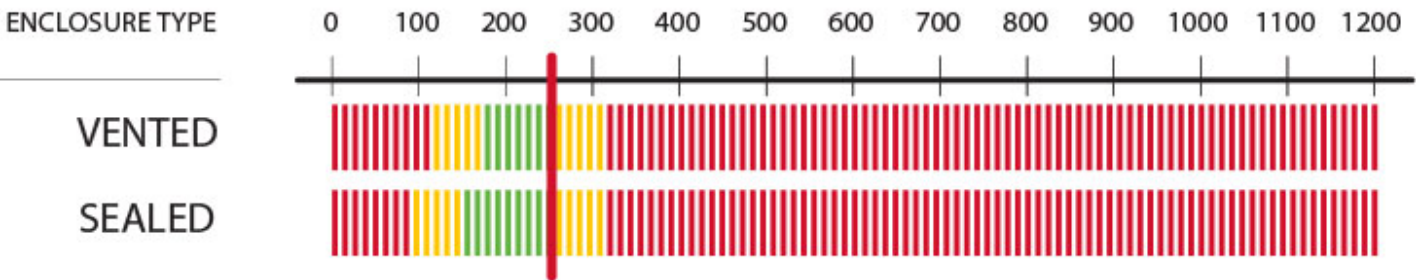

Specifications

Thiele/Small Parameters

 **44CWCD104** T/S Parameters PDF

(/app/products/caraudio/subs/comp17/p44_cwcd104/files/44CWCD104.pdf)

Size (IN.,CM)

10, 25

Impedance (OHMS)

4 DVC

Recommended Amplifier Power (watts RMS)

250

Peak Power (watts, per ANSI/CTA-2031-A)

500

Sensitivity (dB 1w/1m)

86.2

Mounting Depth (in, cm)

4-13/16, 12.2

Mounting Diameter (in, cm)

9-1/8, 23.1

Min Sealed Box Vol (cu. ft, L)

1.0, 28.3

Max Sealed Box Vol (cu. ft, L)

2.4, 68

Min Vented Box Vol (cu. ft, L)

1.25, 35.4

Max Vented Box Vol (cu. ft, L)

1.75, 49.6

*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

**Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

You may also like these related products***43CWR10G**

10" CompR Grille

(10-inch-compr-grille)