


# GE Zoneline® Heat Pump Unit with Corrosion Protection, 230/208 Volt



Model# AZ65H09DAC

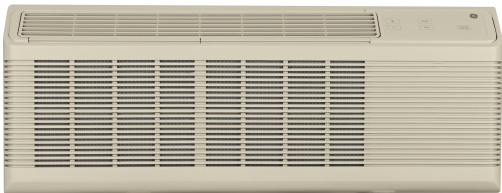

- Cooling capacity - 9,700/9,600 BTU
- Energy efficiency - 12.2/12.2 EER
- Dehumidification - 2.6 pints/hour
- Reverse heat cycle - 8,100/8,000 BTU
- Heat pump efficiency - 3.7/3.7 COP
- Indoor fan CFM (high/low) - 409/300
- Fresh air vent CFM (fully open high fan) - 40
- Quiet operation - Baked-on mastic sound barrier, cross flow blower and two DC fan motors create less noise to ensure comfort
- Corrosion resistant - Extends life of the unit in sea coast areas/corrosive environments
- Heat & Freeze Sentinels - Keeps the room from overheating or freezing
- Boost heat option - Provides supplemental resistance heat in heat pump mode
- Electronic temperature limiting - Prevents expensive over-cooling or over-heating of the room
- - Electronic touch controls with LED display
- - R-410A refrigerant
- - SMC base pan
- Simplified structure - Easy to maintain and service

Have more questions? Please contact 1-800-626-2005

### FEATURES

Sensible Heat Ratio	68%
Chassis Type	Slide-In
Control Type	Standard Microcomputer; Tactile touch pad with LED Display
Corrosion Treated	Yes
Discharge Grille	2-position
Electronic Micro Computer Control	Yes
Fan Cycle Switch	Yes
Fan Motor	2
Fan Speed Control	Yes
Fan Speed Selections	Hi/Low Cooling; Hi/Low Fan Only; Hi/Low Heating
Filter Type	Rigid Frame; Slide-Out
Heat - Cool	Yes
Louver Style	Reversible
Manual Vent Control	Hidden
Rotary Compressor	Yes
Temperature Limiting	Electronic 7-Step
Vent Control	3-position
Venting Features	Concealed Manual Vent Control; Outdoor Vent Control - 3 Positions; Vent Air Filter
Zoneline Features	"Sleep" Mode; "Smart Fan" Fan Cycle Control; 3-Stage Heating Design; Auto Power Recovery; Automatic Emergency Heat; Automatic Indoor Frost Control; Central Desk Control Compatibility; Freeze Sentinel; Heat Pump with Resistance Heat Backup; Heat Pump with Supplemental Resistance Heat; Heat Sentinel; LCDI Power Cord (purchased separately); Proportional - Integral ID Airflow; Quick Heat Recovery; Random Twist/Length Segment Tangential Blower; Remote Thermostat Compatibility; Reverse Cycle Defrost; Universal Heaters; Weather Protected Electrical Components
Product Type	Packaged Terminal Air Conditioners (PTAC)
Temperature Range	60 - 85 F

# GE Zoneline® Heat Pump Unit with Corrosion Protection, 230/208 Volt



Model# AZ65H09DAC

## **APPROXIMATE DIMENSIONS (HxDxW)**

- 16 in x 20 13/16 in x 42 in

## **CAPACITY**

- Cooling BTUH (MIN) 9600.00 Btu
- Cooling BTUH (MAX) 9700.00 Btu
- Cooling EER (BTUH / Watt) 12.2/12.2
- CFM Indoor Fan High 420
- CFM Indoor Fan Low 300
- Dehumidification (pts./hr.) 2.60
- Heating - Reverse Cycle - BTUH 8100/8000
- Vent CFM (high fan at zero ESP) 40

## **WARRANTY**

- Parts Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Labor Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Warranty Notes - See written warranty for full details

Have more questions? Please contact 1-800-626-2005