

SIZE	BLACK	STAINLESS	WHITE	GREASE FILTER(S) (replacement)	NON-DUCTED FILTER(S)
30-in.	BNSC130BL	BNSC130SS	BNSC130WW	HPFA (Type "A0")	HPF1 (Type "Xa")
36-in.	BNSC136BL	BNSC136SS	BNSC136WW	HPFA (Type "A0")	HPF1 (Type "Xa")

Performance						
Duct Orientation	Size	Damper	Sones		CFM @ 0.1 Ps	
			Normal	High	Normal	High
Vertical - Rectangular	3¼-in. x 10-in.	Included	1.5	5.0	140	230
Horizontal - Rectangular	3¼-in. x 10-in.	Included	1.5	5.0	110	210
Round - Vertical	7-in.	Sold Separately	1.5	5.0	150	250


Control type	2-speed Rocker
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level Halogen (not included)
Grease Filter(s)	Open Mesh (Qty. 1)
Installation Hardware	Standard
ENERGY STAR®	no
Recirculation	Non-ducted filter(s) sold separately

120V, 60 Hz - 1.4 AMPS

7-in. Round Damper	BP87
--------------------	------

18-in. to 24-in. from cooktop to bottom of hood

1-year

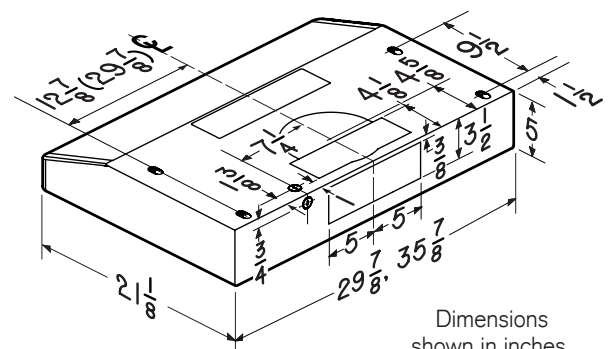

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.