

Open Air Culinary Systems



AXEFWC
Cart Mounted
Food Warmer Installation

Please follow the next simple steps to install the AXEFWC Cart Mounted Food Warmer.

Only a standard Philips screw driver is required:




# STEP 1:

Remove the existing left side table by lifting and slinding out from the support brackets.



# STEP 2:

Remove the existing brackets by loosening and removing the four 10-32 flat head screws.

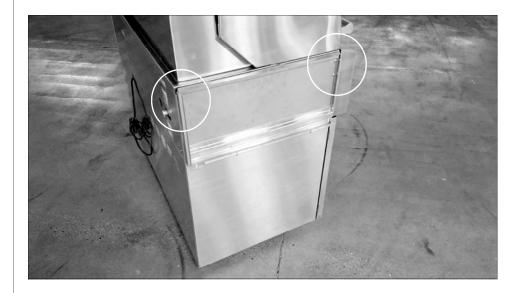

## STEP 3:

Install the new support bracket with four 10-32 pan head screws provided.

Tighten screws securely with a standard Philips screw driver.



## STEP 4:

Install the AXEFW food warmer over the bracket and let it rest on the bottom step of the support bracket.

Align the front of the AWEFW food warmer with the front of your BBQ unit.



## STEP 5:

Install the small (12" long) lock bracket on the right side of the unit support bracket.

This will prevent the AXEFW from lifting out and will permanently lock it in place.

Use two 10-32 screws provided.



### STEP 6:

Install the left side finish cover panel to the AXEFW unit.

The panel is installed under the top perimeter of the AXEFW unit.

The finish panel is supported with an additional 12" long lock bar.

Use two 10-32 screws provided.



## **STEP 7:**

Install the AXEFW food warmer rear cover plate by sliding the top edge under the AXEFW top rim perimeter.

Fasten the rear cover plate with an additional two 10-32 screws from the underside of the unit.



## STEP 8:

Install the chaffing tray, steam / water pan and food pans.



# STEP 9:

The unit is ready for use.

Use the cover when not in use to avoid dirt and debris in the unit.

The AXEFW cover can also be used as a side tray when the unit is not in use.