USER'S MANUAL

CXX104DVC

10" (254 mm) DUAL 4Ω VOICE COIL SUBWOOFER



BOSS Audio Systems 3451 Lunar Court • Oxnard, CA 93030

www.bossaudio.com 800-999-1236 US Toll-free 805-751-4853 Customer Service

Tech Support: www.bossaudio.com/support/technical-support



0418

USER'S MANUAL

CXX104DVC

10" (254 mm) DUAL 4Ω VOICE COIL SUBWOOFER







Congratulations on your purchase of the Boss Audio "CXX" Series Subwoofer. Boss Audio takes great pride in producing products that look great, sound great, and stand up to the daily rigors applied by audio enthusiasts around the world.








CXX104DVC 10" (25 cm) Subwoofer

- Dual 4 Ω Voice Coils
- 1000 W Peak Power Handling
- High Temperature Voice Coils
- Polypropylene Cone






Wiring your Subwoofer

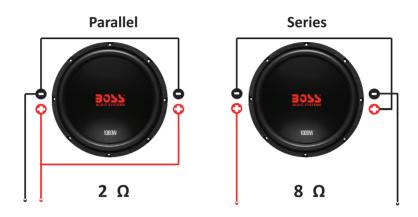

Multiple Subwoofers

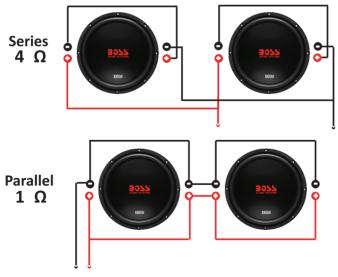





Product Specifications

Vas 1.504 ft³ (42.6 liters)

Xmax 9 mm
Sensitivity (1 W/ 1 m) 86 dB
Peak Power Handling 1000 W

Mounting Depth 4.65" (118mm)
Cutout Diameter 9.1" (232 mm)





Enclosures


The CXX104DVC is designed to work in both sealed or ported enclosures.

Since the woofer has pole–vent, it needs a minimum clearance from the rear wall enclosure of 0. 75" (19 mm).

Below you will find the dimensions to make the enclosure, it has been designed for maximum output while retaining great sound quality.


The dimensions have already accounted for the volume displacement of the subwoofer, and using 3/4" (19mm) MDF. All dimensions are external.

Enclosure Dimensions



Sealed Dimensions:

Length (L) : 14" (356 mm) Width (W) : 10" (254 mm) Height (H) : 12" (305 mm) Cutout Diameter: 9.1" (232mm) Minimum Int. Volume: 1.0 ft^3



Ported Dimensions:

Length (L): 22" (559 mm)
Width (W): 10" (254 mm)
Height (H): 12" (305 mm)
Cutout Diameter: 9.1" (232 mm)
Port Diameter: 3" (76 mm)
Port Length: 6.5" (165 mm)

Tuning Freq: 40 Hz

Minimum Int. Volume: 1.5 ft3





Technical Support

If you need technical support with your Boss Audio product or have questions about its use, please contact us:

805. 751. 4853 www. BossAudio. com

Due to ongoing product development, specifications are subject to change without notice.

