

## Refrigeration Equipment Mega Top Table, 29" with 2 drawers and 9GN1/6+3GN1/9 containers - Stainless Steel (R290)

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738286 (KCHMT29.12.2D)

2-drawer mega top  
preparation table, 29", R290  
refrigerant gas, +33/+41°F,  
stainless steel

### Short Form Specification

#### Item No.

2-drawer mega top refrigerated preparation table. Exterior back panel in aluminum, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features


- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

### Construction


- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

APPROVAL: \_\_\_\_\_

**Front**

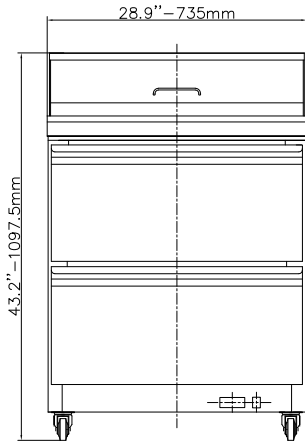


**Side**

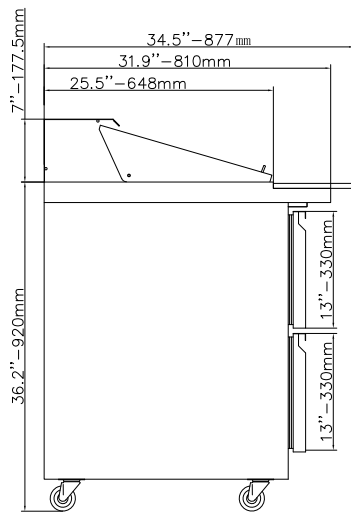

EI = Electrical connection

**Top**

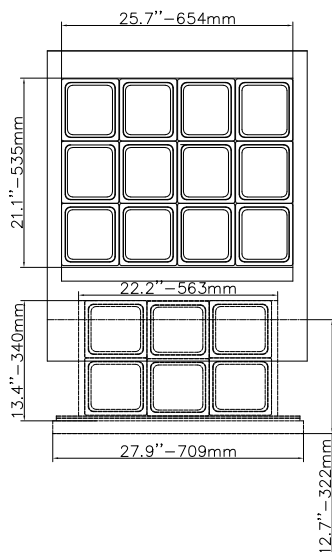

### Electric

#### Supply voltage:

738286 (KCHMT29.12.2D) 115 V/1 ph/60 Hz

#### Electrical power, max:

0.5 kW

#### Current consumption:

5 Amps

#### Plug type:

USA NEMA 5-15P

### Capacity:

#### Gross capacity:

7 cu.feet

### Key Information:

#### External dimensions, Width:

28 15/16" (735 mm)

#### External dimensions, Depth:

34 1/2" (877 mm)

#### External dimensions, Height:

43 3/16" (1097.5 mm)

#### Number and type of doors:

#### Internal Dimensions (depth):

23 13/16"

#### Internal Dimensions (height):

23 1/2"

#### Internal Dimensions (width):

24 1/16"

#### Shipping height:

47 1/4" (1200 mm)

#### Shipping weight:

231 lbs (105 kg)

#### Shipping volume:

29.88 ft<sup>3</sup> (0.85 m<sup>3</sup>)

#### Number and type of grids (included):

1 - Vinyl-Coated Steel

#### Type of external material:

Stainless Steel

#### Type of internal material:

Polystyrene

#### Warranty:

3 / 5 years

### Refrigeration Data

#### Compressor power:

R290

#### Refrigerant type:

85 g

#### Refrigerant weight:

#### Operating temperature min.:

32 °F

#### Operating temperature max.:

41 °F

#### Condenser type:

Fin & tube

#### Defrost type:

Auto Defrost