# MRRE215 - 15" REFRIGERATOR

### THE ESSENTIAL COLLECTION





#### **DESIGN**

Cylindrical door pull on stainless steel model.

Matte black interiors with stainless steel accents on shelves.

Panel-ready model accepts custom door panel.

**Zero-clearance, low-profile pin hinges** on stainless steel models, panel-ready models require additional clearance.

#### **FEATURES**

Built for both indoor & outdoor use.

Carbon filter for enhanced air quality and odor reduction.

Center Cabinet Vertical Lighting: Complete illumination for full visibility throughout the entire interior.

Door alarm activates when the door is left open.

Door lock provides added security.

**Effortless Entry Door:** Minimizes the physical effort needed, enhancing ease of use for all family members.

Electronic touch control enables precise temperature selection from 34°F to 61°F.

**Evenly distributed forced-air refrigeration system** delivers rapid cool down and temperature stability.

Field reversible door is shipped right-hand hinged.

Four leveling legs adjustable up to 1 inch.

Sabbath Mode disables interior lights, alarms, and digital displays while maintaining consistent cooling performance.

**Six-color multi-point LED lighting in adjustable white:** bright white, warm white, cool white, and light blue, deep blue, and teal.

#### **STORAGE**

3.0 cu. ft. capacity stores up to 88 12-oz cans.

Additional lower storage area.

Three adjustable glass shelves.

#### CAPACITY

Volume	3.0 cu. ft.
Cans (12 oz)	88

#### **DIMENSIONS**

Product Depth	22 9/16" (57.3 cm)		
Product Height (Min.)	33 5/8" (85.4 cm)		
Product Width	15" (38.1 cm)		
Product Weight	95 lbs		
Shipping Depth	31" (78.7 cm)		
Shipping Height	37" (94 cm)		
Shipping Width	19" (48.3 cm)		
Shipping Weight	115 lbs		

#### **CUSTOM PANEL DIMENSIONS**

Panel Height	30 7/16" (77.3 cm)
Panel Thickness	5/8" (1.6 cm) or 3/4" (1.9 cm)
Panel Width	23 5/8" (60 cm)
Panel Weight (Max.)	40 lbs
Panel Type	Solid panel

#### SUSTAINABILITY

Refrigerant Type	R600a		
GWP (Global Warming Potential)	3 (very low)		

#### **TECHNICAL DETAILS**

Cord Length	6 ft.	
Electrical Requirements	115V / 60 Hz / 15A	

#### WARRANTY

2 year parts & labor warranty / 6 year compressor parts warranty (see complete warranty for details).



## MRRE215 - 15" REFRIGERATOR

## THE ESSENTIAL COLLECTION



#### **INSTALLATION**


No additional clearance is needed for ventilation.


Do not obstruct front grille air flow.

Panel ready model requires 3/4" or 5/8" custom panel and handle (not supplied by

Add 5/8" to the width for panel ready models with 3/4" integrated panel.

#### **PRODUCT DIMENSIONS**

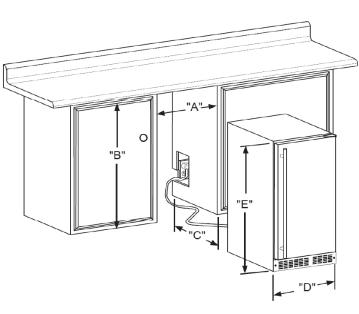

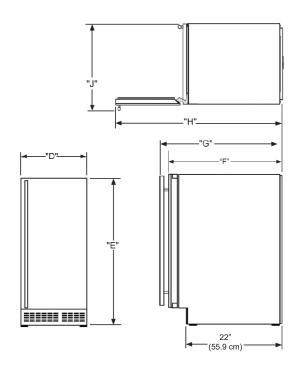

Line art not to scale. Intended for general reference only.

## **ROUGH IN DIMENSIONS**

"A"	"B"	"C"
15 1/4"	34 1/8" to 35 1/8"	24"
(38.7 cm)	(86.7 cm to 89.2 cm)	(61 cm)

## **CABINET DIMENSIONS**

	"D"	"E"	"F"	"G"	"H"	"J"
	15"	33 5/8" to 34 5/8"	22 9/16"	24 1/4"	36 1/2"	16 3/4"
	(38.1 cm)	(85.4 cm to 88 cm)	(57.3 cm)	(61.6 cm)	(92.7 cm)	(42.5 cm)
_	(30.1 (11)	(00.4 cm to 00 cm)	(37.3 (11)	(01.0 CIII)	(92.7 (111)	(42.0 (111)

#### **MODELS**



MRRE215-SS31A

Stainless Steel Solid



MRRE215-IS31A

Panel Ready Solid