WWD30

FEATURES

Distributes heat evenly from 80 to 200 degrees Fahrenheit using fans

Tested and approved for warming towels

Fits entrées and sides easily in its generous 30 inch drawer cavity

Includes hidden electronic controls

Offers automatic shut-off

ACCESSORIES

30" Stainless Professional Front Panel - 2" Thick

36" Stainless Professional Front Panel - 2" Thick

6-Piece Container Set

Contemporary Handle- E Series

Contemporary/Transitional Handle

Professional Handle-E Series

Professional Handle-M Series

Transitional Handle- M Series

Warming Drawer Front Panel - Integrated

Warming Drawer Front Panels - M Series

Warming Drawer Front Panels - E Series

Accessories available through an authorized dealer. For local dealer information, visit subzero-wolf.com/locator.



FRONT PANEL OPTIONS





NOLF



30" M SERIES CONTEMPORARY







30" INTEGRATED





30" M SERIES CONTEMPORARY STAINLESS



30" M SERIES PROFESSIONAL


Specifications are subject to change without notice. This information was generated on November 28, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.

30" WARMING DRAWER

PRODUCT SPECIFICATIONS

WWD30
29 7/8"W x 10 3/8"H x 22 3/4"D
1.6 cu. ft.
75 lbs
120 VAC, 60 Hz
15 amp dedicated circuit
3 Feet
3-prong grounding-type


ELECTRICAL




INSTALLATION WITH FRONT PANEL Accessory front panels may affect overall product dimensions and opening dimensions. Refer to Reveal for more information: <u>subzero-wolf.com/reveal</u>

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS



FLUSH INSTALLATION

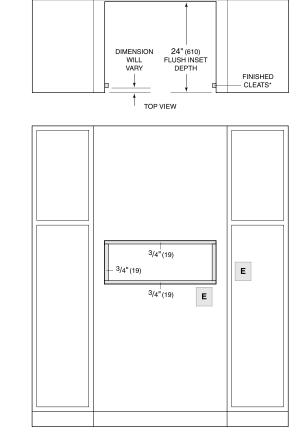

SIDE VIEW

ANTI-TIP BLOCK

FRONT VIEW

*Will be visible and should be finished to match cabinetry.

²⁰ 10⁵/8"

(270) FLUSH INSET HEIGHT**

NOTE: Location of electrical supply within opening may require additional cabinet depth.